

The image displays four silver-colored metal telescopic ball bearing slides arranged diagonally against a dark teal background. The slides are shown in various extended and retracted states, revealing the internal ball bearings and the precision-machined tracks. The top-most slide is fully extended, while the others are partially retracted, showing the nested design. The slides feature multiple mounting holes along their length and a robust, industrial-grade finish.

# HepcoMotion<sup>®</sup>

**HTS**  
telescopic ball  
bearing slides

## Contents

### Introducing the HepcoMotion® HTS

|                      |   |
|----------------------|---|
| Feature and Benefits | 1 |
|----------------------|---|

### CONSTRUCTION 2

#### EXPLANATION OF TERMS

|                            |   |
|----------------------------|---|
| Load Rating                | 2 |
| Load Rating and Duty Cycle | 2 |
| Safety                     | 2 |
| Travel (Extension)         | 3 |
| Linear Motion              | 3 |
| Lever Disconnect           | 3 |
| Lock-out                   | 3 |
| Retaining Spring           | 3 |
| Guide Bar                  | 3 |

### RECOMMENDED APPLICATIONS 3

### STANDARD MATERIAL SPECIFICATIONS 3

### ORDERING INFORMATION 3

### MOUNTING 4

### CUSTOMIZED SLIDES 4

### FEATURE REFERENCE TABLE 5


#### SLIDE SERIES

|              |       |
|--------------|-------|
| Super Slim   | 6-10  |
| Medium Light | 11-16 |
| Medium       | 17-23 |
| Compact      | 24-29 |
| Heavy duty   | 30-35 |

# Introducing the HepcoMotion®

## HTS Hepco Telescopic Ball Bearings Slides

Hepco telescopic ball bearing slides are manufactured under strict quality control conditions backed by ISO 9002 certification using the highest quality materials and up to date manufacturing processes. These high quality slides are quiet, rigid under extended loads and due to the superior construction offer excellent smooth motion and low friction characteristics across the complete travel length.

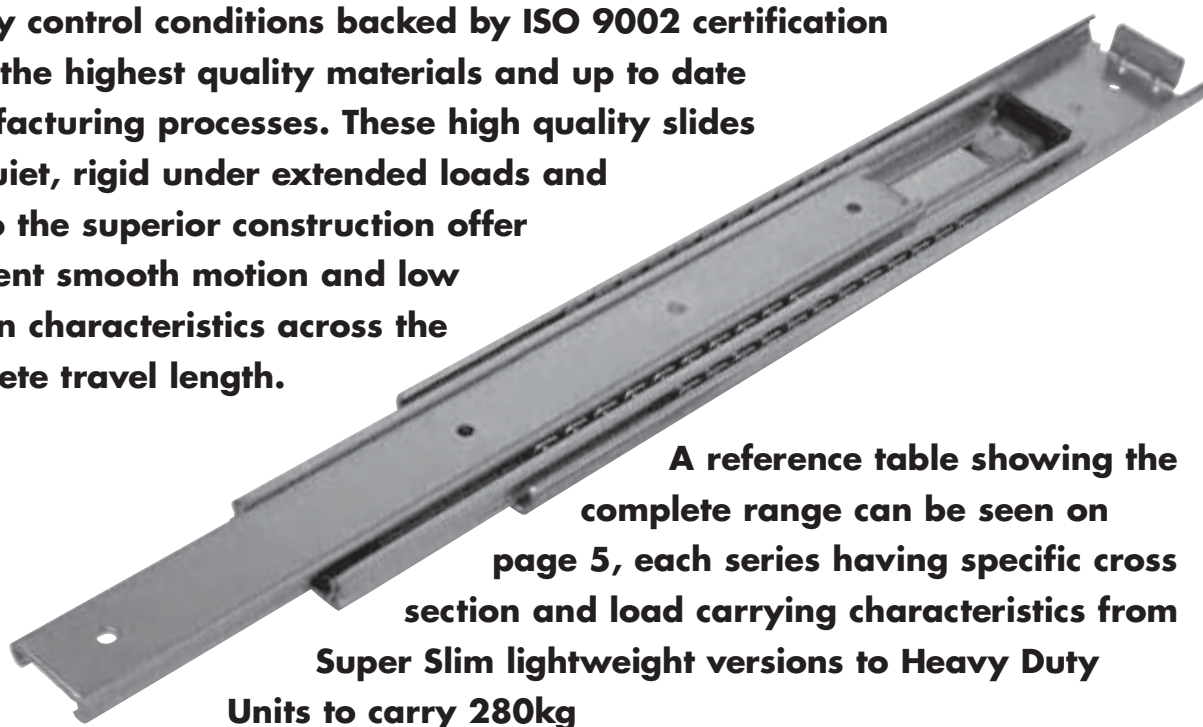

A reference table showing the complete range can be seen on page 5, each series having specific cross section and load carrying characteristics from Super Slim lightweight versions to Heavy Duty Units to carry 280kg

Deliveries across the whole range are highly competitive but for maximum convenience we do stock the more popular series slides and these are highlighted in the catalogue as **STOCK SERIES**. This standard range of precision slides are used in in all sectors of industry from one off installations to volume series requirements.


Any quantity can be supplied whether one pair or a thousand pairs HTS is a highly competitive solution for you telescopic slide requirements.

### Features and Benefits


- 5 basic ranges from light loads to heavy duty
- Range of options available, lock out, disconnect etc.
- Specific ranges available from stock
- Rigid member recirculating ball bearing slide structure maintains smooth motion over entire travel
- High static capacity from rigid structure with minimal deflection
- Quality cold rolled steel members with slotted mounting holes for quick installation
- Exceptional accuracy from precision pressed slide rails
- 3 member slide series for higher capacity in narrow space

## Construction

### • 2 Member Slide

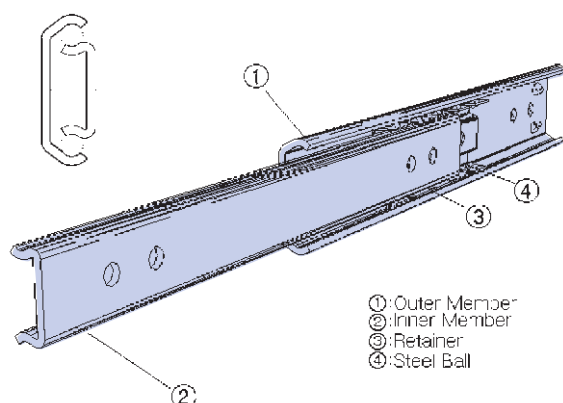

### • 3 Member Slide

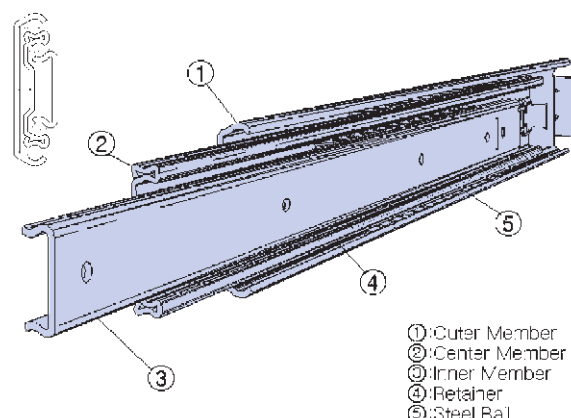



## Explanation of terms

### Load rating

Load rating is the maximum recommended load for a pair of slides. Slides are side-mounted and based on a 10,000 cycle dynamic test. This test is based on the centre of gravity of the load being in the mid-point of the complete open travel and in the middle of the drawer (drawer width is 400 mm). For drawer widths in excess of 400mm please contact our technical department.

### Load rating & duty cycle

Load rating and duty cycle are closely related. Load rating should be looked at in conjunction with the number of cycles i.e. high duty cycle will result in a reduction of the load rating by the factors shown in the table. Also, under-mounting or bottom mounting of slides is not recommended because this will greatly reduce the load rating to approximately 1/4 the standard load rating.

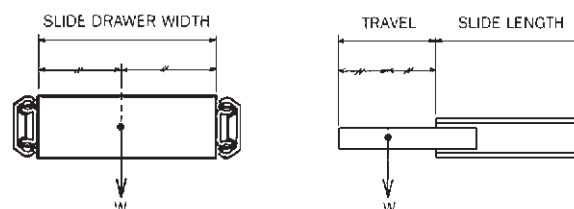

| Duty cycle                | Recommended rating       |
|---------------------------|--------------------------|
| 10,000 $\times$           | load rating $\times$ 1   |
| 50,000 $\times$           | load rating $\times$ 0.8 |
| 100,000 $\times$          | load rating $\times$ 0.7 |
| 500,000 $\times$          | load rating $\times$ 0.5 |
| 1,000,000 $\times \times$ | load rating $\times$ 0.2 |

### Safety

Hepco test slides to withstand a static load 2 times the standard load rating at full travel (open position). Also, slides are designed to withstand a static load 4 to 5 times the standard load rating in the closed position.

## Explanation of terms cont.

### Travel (Extension)

**3/4 Travel** - slide extends approximately 3/4 of the total slide length, for applications not requiring complete access to drawer/components.

**Over Travel** - slide extends further than the length of the slide allowing total and easy access to the drawer/components, often a convenient feature.

**Both Side Travel** - slide is able to extend in either direction allowing access to drawer or components from either side of the cabinet.

**Linear Motion** - contains an inner moving member which movement is restricted to within the slide.

**Lever Disconnect** - Actuate the latch and the drawer can be removed from the main unit.

**Lock-Out** - Locks the slide in the open position preventing accidental closure and can be released when actuated by the latch.

**Retaining Spring** - Locks the center member of a three member slide in the open position preventing accidental closure and can be released when actuated by the latch.

**Guide Bar** - Allows easy reassembly of disconnected drawer.

## Recommended Applications

- IT appliances & equipment
- Automation equipment, instruments, facilities
- Medical equipment
- Office automation equipment
- Fire appliance equipment & facilities
- Measuring equipment
- Other industrial precision equipment
- Banking equipment

## Standard Material Specifications

- Slide members & ball retainers : Cold rolled steel
- For high consistency, we only use centercut cold rolled steel
- Ball bearings : High carbon steel
- Finish : Bright electro zinc plate
- Lubricant : Hi-Lo temperature grease
- Temperature range : -40F(-4C)to+130F(+55C)

## Ordering Information

Telescopic Ball Bearing Slides are generally used in pairs however catalogue part numbers relate to an individual Slide and are priced accordingly.

## Mounting

To achieve smooth running;


- Maintain parallelism between rails
- Secure balance by drawing in and out with 5–6Kg weight load before fixing.

### Examples of mounting

A : Recommended


B : Not Recommended, but usable

C : Not Recommended

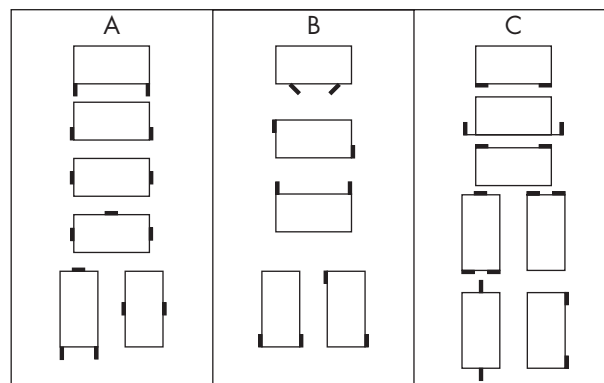

## Customized Slides

- Provide the solution to your suspension or movement requirements as shown below.
- The following are only some of the ways Slide rails can be customized to suit your application. Please contact our technical department for further information.

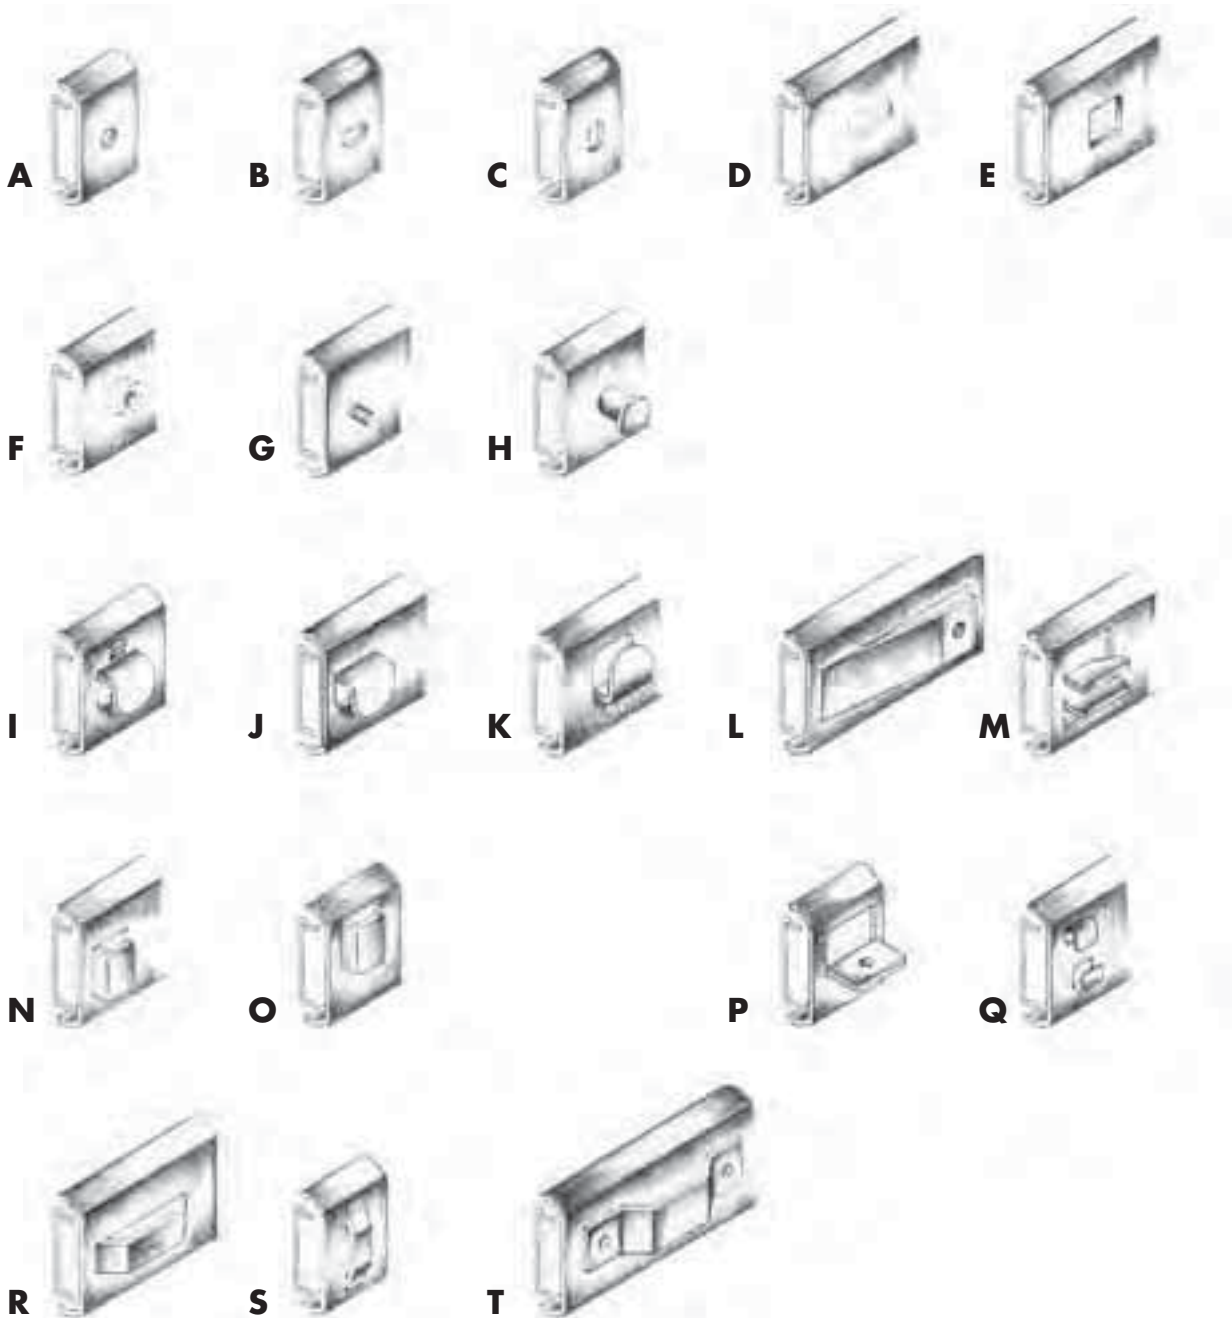

## Feature Reference Table



Illustrations not to scale

[illegible]

## TS-2011 LINEAR MOTION SLIDE

### Model TS-2011

- Linear motion
- Load rating (per pair)  
20kg at min travel  
15kg at max travel
- #4(M3) pan head screw
- Non-disconnect

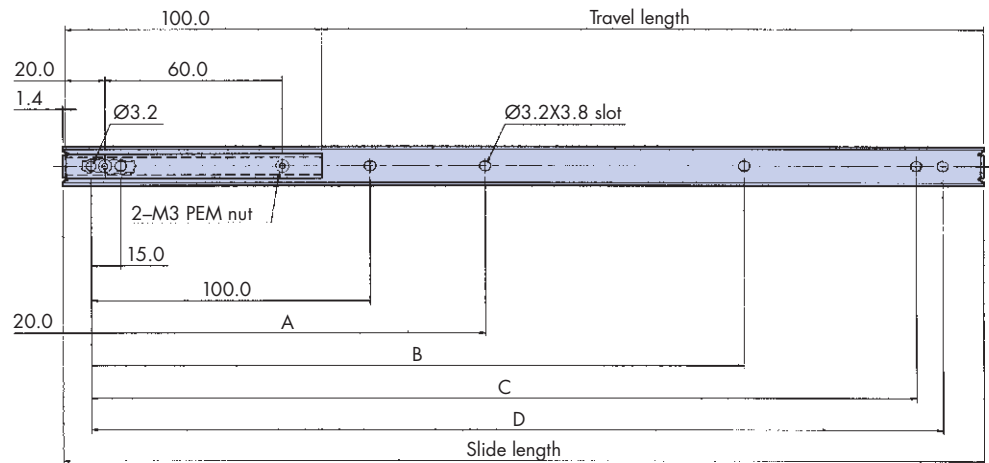


| Part number | Slide length | Travel length | Hole length mm |       |       |       | Slide weight kg/pair |
|-------------|--------------|---------------|----------------|-------|-------|-------|----------------------|
|             |              |               | A              | B     | C     | D     |                      |
| TS-2011-200 | 200.0        | 97.0          | –              | –     | 145.0 | 160.0 | 0.27                 |
| TS-2011-250 | 250.0        | 147.0         | –              | –     | 195.0 | 210.0 | 0.36                 |
| TS-2011-300 | 300.0        | 197.0         | –              | 160.0 | 245.0 | 260.0 | 0.44                 |
| TS-2011-350 | 350.0        | 247.0         | –              | 210.0 | 295.0 | 310.0 | 0.53                 |
| TS-2011-400 | 400.0        | 297.0         | –              | 260.0 | 345.0 | 360.0 | 0.61                 |
| TS-2011-450 | 450.0        | 347.0         | 205.0          | 310.0 | 395.0 | 410.0 | 0.69                 |
| TS-2011-500 | 500.0        | 397.0         | 230.0          | 360.0 | 445.0 | 460.0 | 0.79                 |

## TS-2020 DISCONNECT BOTH SIDE TRAVEL SLIDE

### Model TS-2020

- Both side travel
- Load rating (per pair)  
20kg at min travel  
15kg at max travel
- #4(M3) pan head screw
- Disconnect

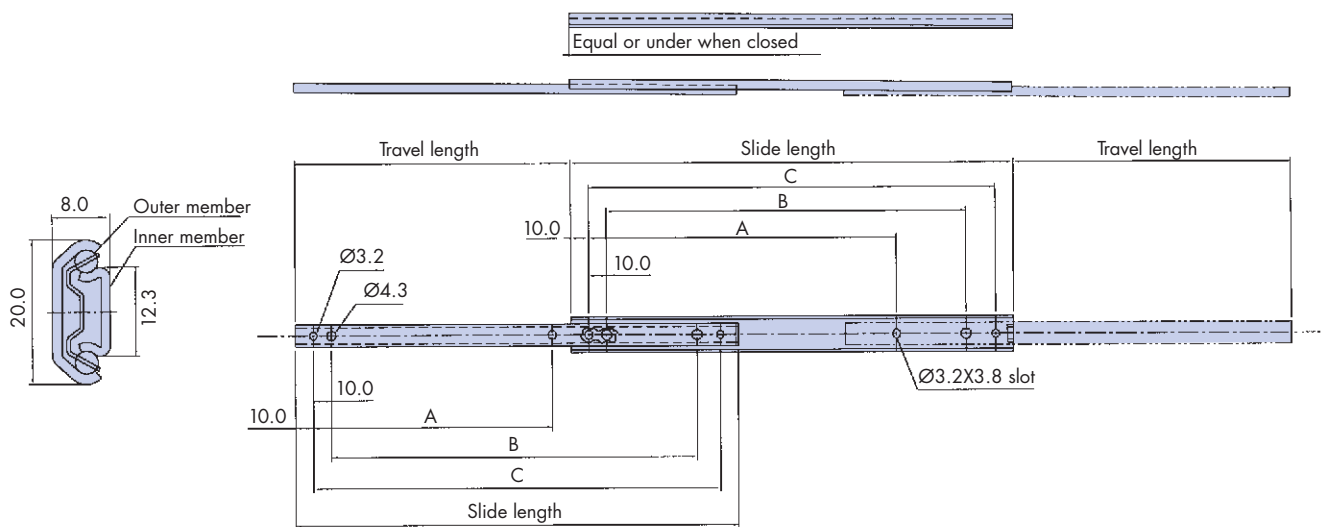


| Part number | Slide length | Travel length | Hole length mm |       |       | Slide weight kg/pair |
|-------------|--------------|---------------|----------------|-------|-------|----------------------|
|             |              |               | A              | B     | C     |                      |
| TS-2020-70  | 70.0         | 15.0          | –              | 30.0  | 50.0  | 0.16                 |
| TS-2020-100 | 100.0        | 25.0          | –              | 60.0  | 80.0  | 0.18                 |
| TS-2020-150 | 150.0        | 45.0          | –              | 110.0 | 130.0 | 0.20                 |
| TS-2020-200 | 200.0        | 75.0          | 90             | 160.0 | 180.0 | 0.27                 |

## TS-2021 3/4 TRAVEL SLIDE

### Model TS-2021

- 3/4 travel
- Load rating (per pair)  
20kg at min travel  
15kg at max travel
- #4(M3) pan head screw
- Non-disconnect

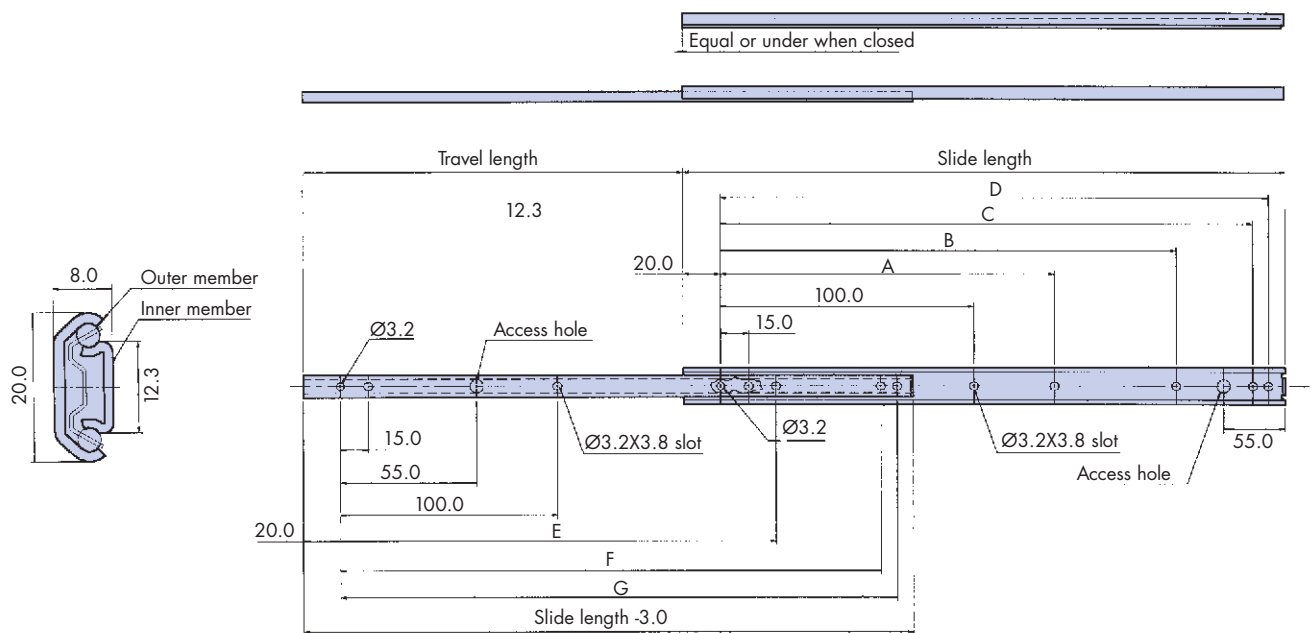

| Part number | Slide length | Travel length | Hole length mm |       |       |       |       |       |       | Slide weight kg/pair |
|-------------|--------------|---------------|----------------|-------|-------|-------|-------|-------|-------|----------------------|
|             |              |               | A              | B     | C     | D     | E     | F     | G     |                      |
| TS-2021-200 | 200.0        | 134.0         | –              | –     | 145.0 | 160.0 | –     | 145.0 | 160.0 | 0.27                 |
| TS-2021-250 | 250.0        | 184.0         | –              | –     | 195.0 | 210.0 | 150.0 | 195.0 | 210.0 | 0.36                 |
| TS-2021-300 | 300.0        | 224.0         | –              | 160.0 | 245.0 | 260.0 | 190.0 | 245.0 | 260.0 | 0.44                 |
| TS-2021-350 | 350.0        | 244.0         | –              | 210.0 | 295.0 | 310.0 | 225.0 | 295.0 | 310.0 | 0.53                 |
| TS-2021-400 | 400.0        | 294.0         | –              | 260.0 | 345.0 | 360.0 | 265.0 | 345.0 | 360.0 | 0.61                 |
| TS-2021-450 | 450.0        | 334.0         | 205.0          | 310.0 | 395.0 | 410.0 | 300.0 | 395.0 | 410.0 | 0.69                 |
| TS-2021-500 | 500.0        | 384.0         | 230.0          | 360.0 | 445.0 | 460.0 | 337.0 | 445.0 | 460.0 | 0.79                 |


## TS-2025 LEVER DISCONNECT LOCK OUT 3/4 TRAVEL SLIDE

### Model TS-2025

- 3/4 travel
- Load rating (per pair)  
20kg at min travel  
15kg at max travel
- #4(M3) pan head screw
- Lever-Disconnect / Lock out

### Model TS-2024

- 2024 version has no lock out

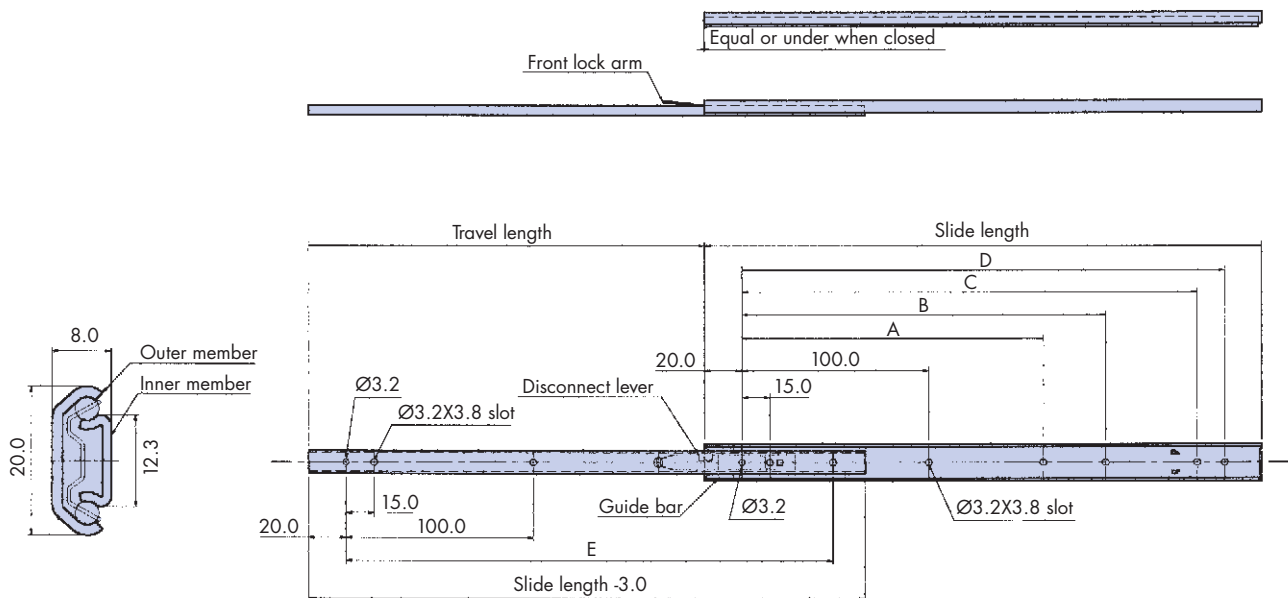


| Part number                | Slide length | Travel length | Hole length mm |       |       |       |       | Slide weight kg/pair |
|----------------------------|--------------|---------------|----------------|-------|-------|-------|-------|----------------------|
|                            |              |               | A              | B     | C     | D     | E     |                      |
| TS-2025-200<br>TS-2024-200 | 200.0        | 121.3         | –              | –     | 145.0 | 160.0 | 160.0 | 0.28                 |
| TS-2025-250<br>TS-2024-250 | 250.0        | 171.3         | –              | –     | 195.0 | 210.0 | 210.0 | 0.37                 |
| TS-2025-300<br>TS-2024-300 | 300.0        | 211.3         | –              | 160.0 | 245.0 | 260.0 | 260.0 | 0.45                 |
| TS-2025-350<br>TS-2024-350 | 350.0        | 231.3         | –              | 210.0 | 295.0 | 310.0 | 310.0 | 0.54                 |
| TS-2025-400<br>TS-2024-400 | 400.0        | 281.3         | –              | 260.0 | 345.0 | 360.0 | 360.0 | 0.62                 |
| TS-2025-450<br>TS-2024-450 | 450.0        | 321.3         | 205.0          | 310.0 | 395.0 | 410.0 | 410.0 | 0.70                 |
| TS-2025-500<br>TS-2024-500 | 500.0        | 371.3         | 230.0          | 360.0 | 445.0 | 460.0 | 460.0 | 0.80                 |

## TS-2031 OVER TRAVEL SLIDE

### Model TS-2031

- Over travel
- Load rating (per pair)  
20kg at min travel  
15kg at max travel
- #4(M3) pan head screw
- Non-disconnect

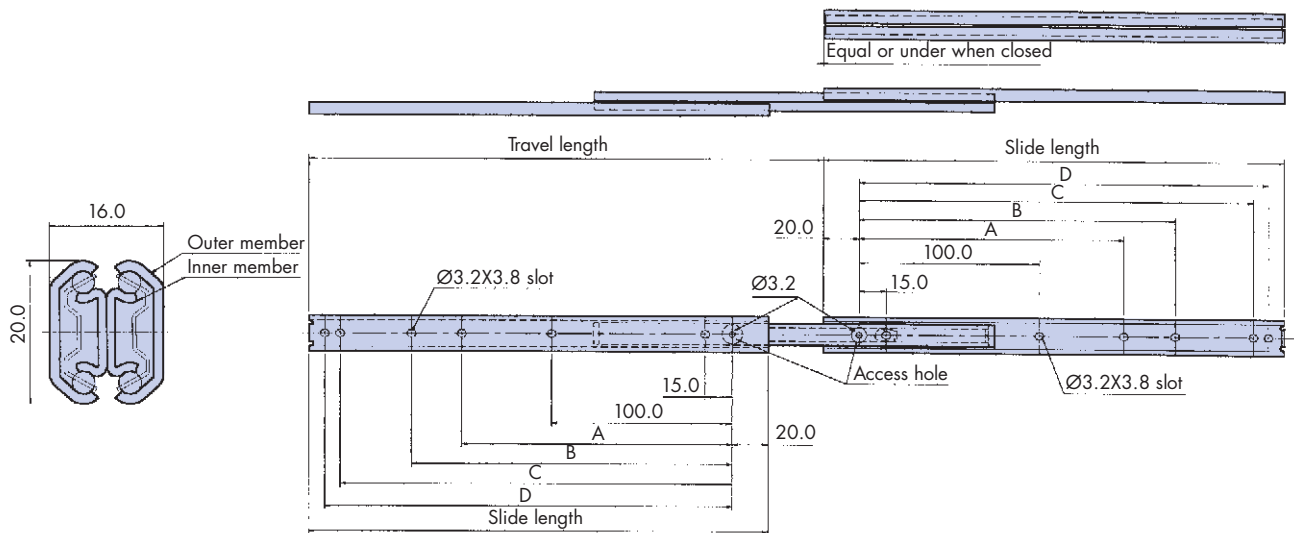


| Part number | Slide length | Travel length | Hole length mm |       |       |       | Slide weight kg/pair |
|-------------|--------------|---------------|----------------|-------|-------|-------|----------------------|
|             |              |               | A              | B     | C     | D     |                      |
| TS-2031-200 | 200.0        | 229.0         | –              | –     | 145.0 | 160.0 | 0.60                 |
| TS-2031-250 | 250.0        | 269.0         | –              | –     | 195.0 | 210.0 | 0.70                 |
| TS-2031-300 | 300.0        | 329.0         | –              | 160.0 | 245.0 | 260.0 | 0.93                 |
| TS-2031-350 | 350.0        | 369.0         | –              | 210.0 | 295.0 | 310.0 | 1.10                 |
| TS-2031-400 | 400.0        | 429.0         | –              | 260.0 | 345.0 | 360.0 | 1.26                 |
| TS-2031-450 | 450.0        | 469.0         | 205.0          | 310.0 | 395.0 | 410.0 | 1.43                 |
| TS-2031-500 | 500.0        | 529.0         | 230.0          | 360.0 | 445.0 | 460.0 | 1.60                 |

### TS-U270 3/4 TRAVEL SLIDE (ALL STAINLESS STEEL)

## Model TS-U270

- 3/4 travel
- Load rating (per pair)  
29–38kg (see table)
- #8(M4) pan head screw
- Non-disconnect

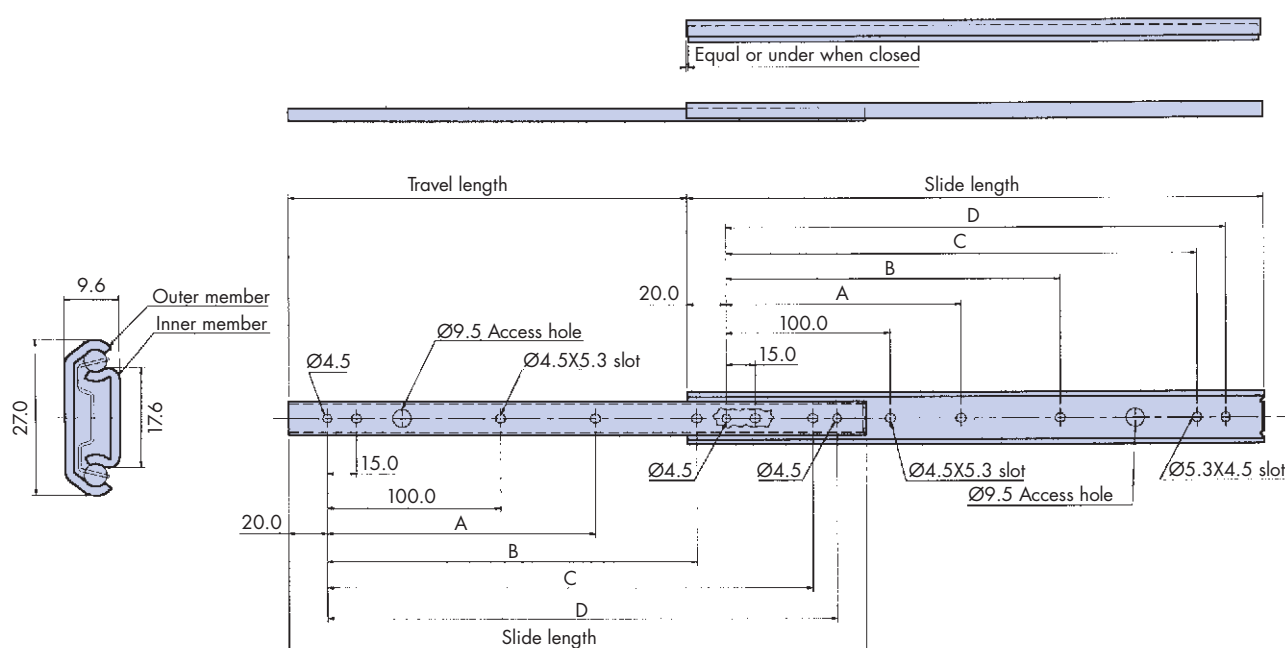


| Part number | Slide length | Travel length | Hole length mm |       |       |       | Load Rating kg/pair | Slide weight kg/pair |
|-------------|--------------|---------------|----------------|-------|-------|-------|---------------------|----------------------|
|             |              |               | A              | B     | C     | D     |                     |                      |
| TS-U270-200 | 200.0        | 134.3         | –              | –     | 145.0 | 160.0 | 38                  | 0.55                 |
| TS-U270-250 | 250.0        | 171.6         | –              | 150.0 | 195.0 | 210.0 | 37                  | 0.60                 |
| TS-U270-300 | 300.0        | 221.6         | –              | 190.0 | 245.0 | 260.0 | 35                  | 0.65                 |
| TS-U270-350 | 350.0        | 258.9         | –              | 225.0 | 295.0 | 310.0 | 33                  | 0.75                 |
| TS-U270-400 | 400.0        | 296.2         | –              | 265.0 | 345.0 | 360.0 | 32                  | 0.86                 |
| TS-U270-450 | 450.0        | 333.5         | 205.0          | 300.0 | 395.0 | 410.0 | 30                  | 0.96                 |
| TS-U270-500 | 500.0        | 370.8         | 230.0          | 337.0 | 445.0 | 460.0 | 29                  | 1.07                 |

# TS-U273 OVER TRAVEL SLIDE (ALL STAINLESS STEEL)

## Model TS-U273

- Over travel
- Load rating (per pair)  
35–47kg (see table)
- #8(M4) pan head screw
- Non-disconnect

STOCK SERIES

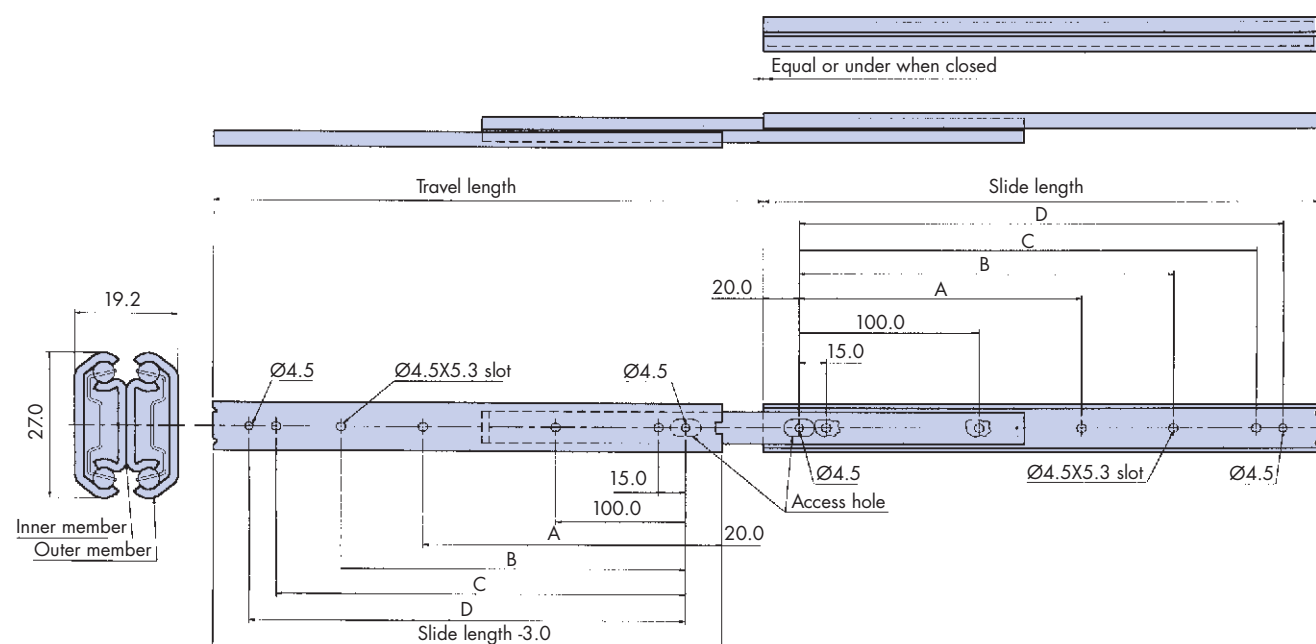


| Part number | Slide length | Travel length | Hole length mm |       |       |       | Load Rating kg/pair | Slide weight kg/pair |
|-------------|--------------|---------------|----------------|-------|-------|-------|---------------------|----------------------|
|             |              |               | A              | B     | C     | D     |                     |                      |
| TS-U273-200 | 200.0        | 217.8         | –              | –     | 145.0 | 160.0 | 47                  | 0.8                  |
| TS-U273-250 | 250.0        | 267.0         | –              | 150.0 | 195.0 | 210.0 | 46                  | 1.0                  |
| TS-U273-300 | 300.0        | 316.2         | –              | 190.0 | 245.0 | 260.0 | 44                  | 1.2                  |
| TS-U273-350 | 350.0        | 365.4         | –              | 225.0 | 295.0 | 310.0 | 42                  | 1.4                  |
| TS-U273-400 | 400.0        | 414.6         | –              | 265.0 | 345.0 | 360.0 | 40                  | 1.5                  |
| TS-U273-450 | 450.0        | 463.8         | 205.0          | 300.0 | 395.0 | 410.0 | 37                  | 1.7                  |
| TS-U273-500 | 500.0        | 513.0         | 230.0          | 337.0 | 445.0 | 460.0 | 35                  | 1.9                  |

## TS-270 3/4 TRAVEL SLIDE

## Model TS-270

- 3/4 travel
- Load rating (per pair)  
26–35kg (see table)
- #8(M4) pan head screw
- Non-disconnect

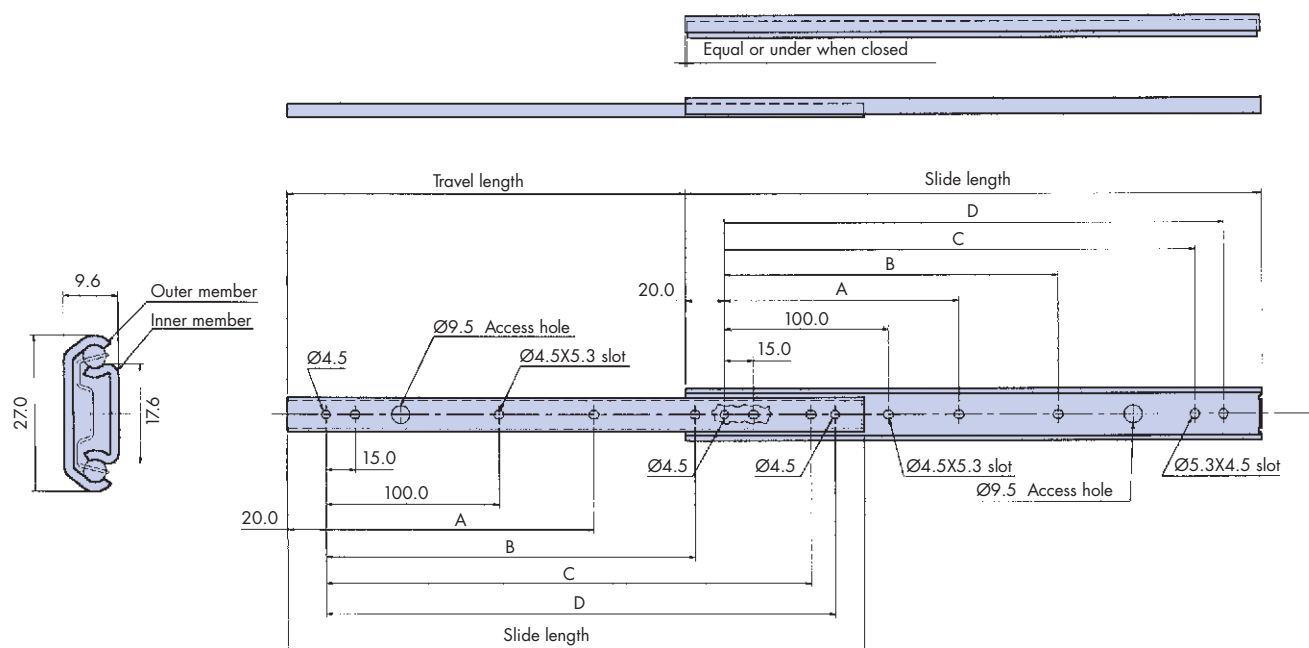

| Part number | Slide length | Travel length | Hole length mm |       |       |       | Load Rating kg/pair | Slide weight kg/pair |
|-------------|--------------|---------------|----------------|-------|-------|-------|---------------------|----------------------|
|             |              |               | A              | B     | C     | D     |                     |                      |
| TS-270-200  | 200.0        | 134.3         | –              | –     | 145.0 | 160.0 | 35                  | 0.55                 |
| TS-270-250  | 250.0        | 171.6         | –              | 150.0 | 195.0 | 210.0 | 34                  | 0.60                 |
| TS-270-300  | 300.0        | 221.6         | –              | 190.0 | 245.0 | 260.0 | 32                  | 0.65                 |
| TS-270-350  | 350.0        | 258.9         | –              | 225.0 | 295.0 | 310.0 | 30                  | 0.75                 |
| TS-270-400  | 400.0        | 296.2         | –              | 265.0 | 345.0 | 360.0 | 29                  | 0.86                 |
| TS-270-450  | 450.0        | 333.5         | 205.0          | 300.0 | 395.0 | 410.0 | 27                  | 0.96                 |
| TS-270-500  | 500.0        | 370.8         | 230.0          | 337.0 | 445.0 | 460.0 | 26                  | 1.07                 |



# TS-2725 LEVER DISCONNECT LOCK OUT 3/4 TRAVEL SLIDE

## Model TS-2725

- 3/4 travel
- Load rating (per pair)  
20–30kg (see table)
- #8(M4) pan head screw
- Lever-disconnect / Lock-out

## Model TS-2724

- TS-2724 version has no lock out feature

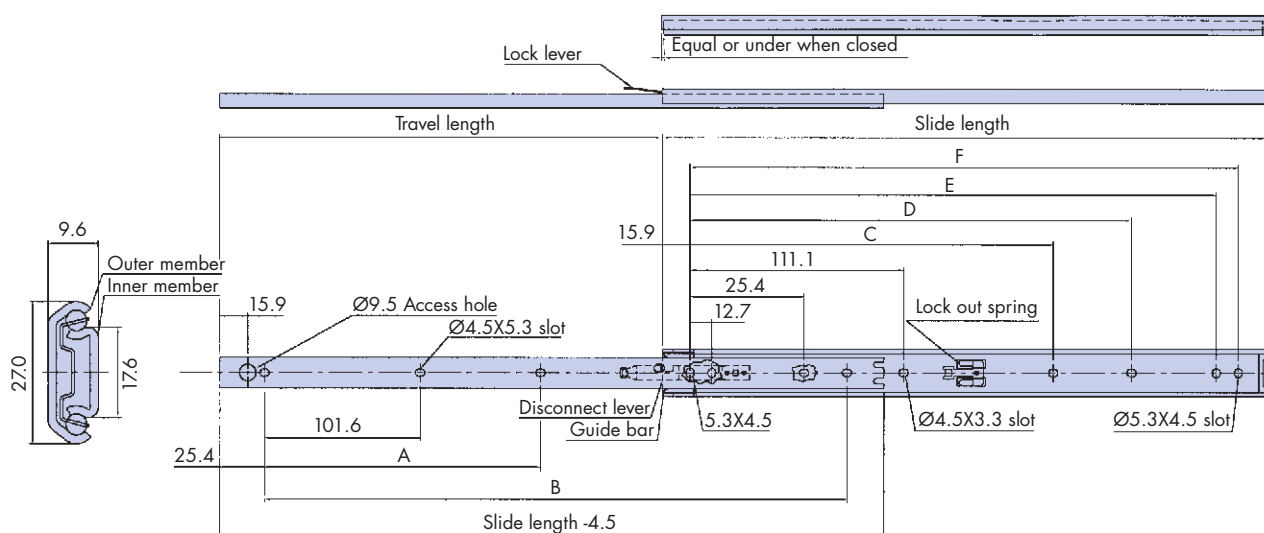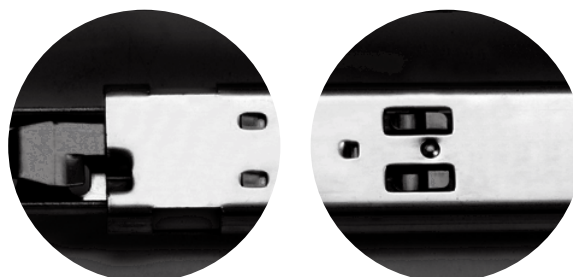


| Part number              | Slide length | Travel length | Hole length mm |       |       |       |       |       | Load Rating kg/pair | Slide weight kg/pair |
|--------------------------|--------------|---------------|----------------|-------|-------|-------|-------|-------|---------------------|----------------------|
|                          |              |               | A              | B     | C     | D     | E     | F     |                     |                      |
| TS-2725-12<br>TS-2724-12 | 304.8        | 203.0         | –              | 254.0 | –     | 149.2 | 260.3 | 273.0 | 30                  | 0.60                 |
| TS-2725-14<br>TS-2724-14 | 355.6        | 254.4         | –              | 304.8 | –     | 200.0 | 311.1 | 323.8 | 29                  | 0.70                 |
| TS-2725-16<br>TS-2724-16 | 406.4        | 305.2         | –              | 355.6 | –     | 250.8 | 361.9 | 374.6 | 28                  | 0.81                 |
| TS-2725-18<br>TS-2724-18 | 457.2        | 330.6         | 203.2          | 406.4 | 212.7 | 301.6 | 412.7 | 425.4 | 27                  | 0.91                 |
| TS-2725-20<br>TS-2724-20 | 508.0        | 381.4         | 228.6          | 457.2 | 238.1 | 352.4 | 463.5 | 476.2 | 25                  | 1.02                 |
| TS-2725-22<br>TS-2724-22 | 558.8        | 406.4         | 254.0          | 508.0 | 263.5 | 403.2 | 514.3 | 527.0 | 24                  | 1.12                 |
| TS-2725-24<br>TS-2724-24 | 609.6        | 432.2         | 279.4          | 558.8 | 228.9 | 454.0 | 565.1 | 577.8 | 22                  | 1.24                 |
| TS-2725-26<br>TS-2724-26 | 660.4        | 483.0         | 304.8          | 609.6 | 314.3 | 504.8 | 615.9 | 628.6 | 21                  | 1.34                 |
| TS-2725-28<br>TS-2724-28 | 711.2        | 508.0         | 330.2          | 660.4 | 339.7 | 555.6 | 666.7 | 679.4 | 20                  | 1.44                 |

# TS-273 OVER TRAVEL SLIDE

## Model TS-273

- Over travel
- Load rating (per pair)  
31–41kg (see table)
- #8(M4) pan head screw
- Non-disconnect

STOCK SERIES

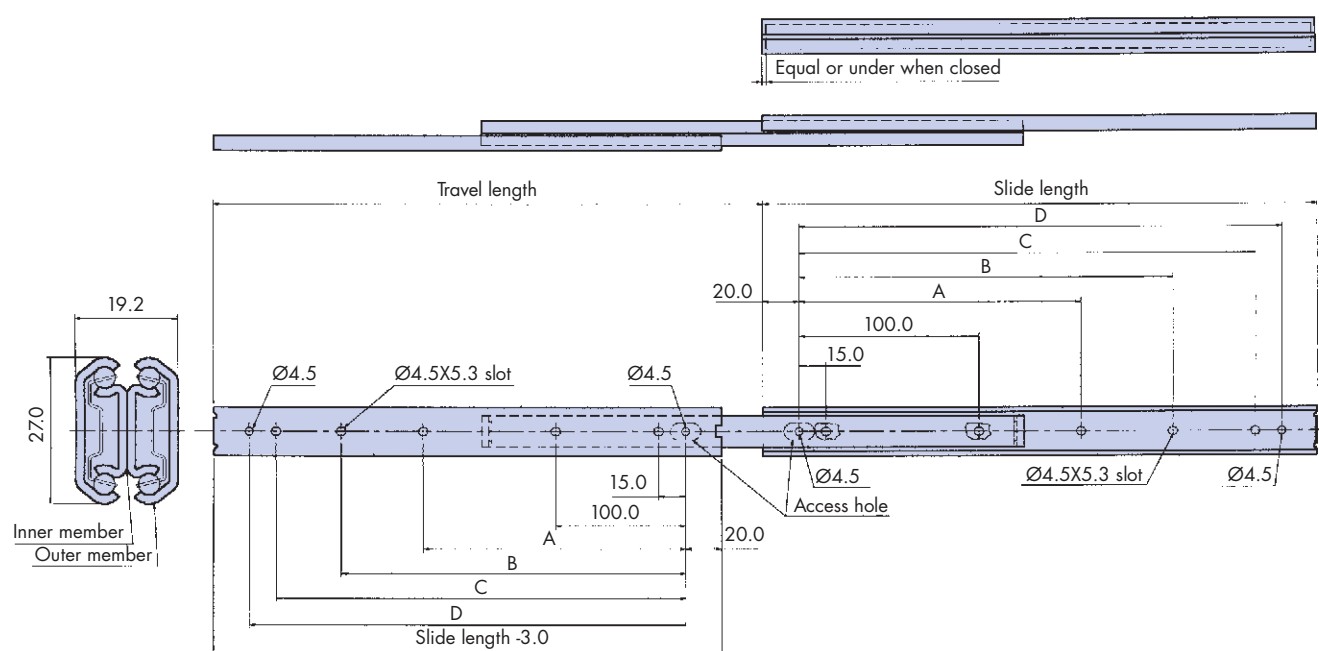


| Part number | Slide length | Travel length | Hole length mm |       |       |       | Load Rating kg/pair | Slide weight kg/pair |
|-------------|--------------|---------------|----------------|-------|-------|-------|---------------------|----------------------|
|             |              |               | A              | B     | C     | D     |                     |                      |
| TS-273-200  | 200.0        | 215.0         | –              | –     | 145.0 | 160.0 | 41                  | 0.41                 |
| TS-273-250  | 250.0        | 264.4         | –              | 150.0 | 195.0 | 210.0 | 40                  | 0.45                 |
| TS-273-300  | 300.0        | 313.6         | –              | 190.0 | 245.0 | 260.0 | 39                  | 0.50                 |
| TS-273-350  | 350.0        | 362.8         | –              | 225.0 | 295.0 | 310.0 | 37                  | 0.60                 |
| TS-273-400  | 400.0        | 412.0         | –              | 265.0 | 345.0 | 360.0 | 35                  | 0.71                 |
| TS-273-450  | 450.0        | 461.2         | 205.0          | 300.0 | 395.0 | 410.0 | 33                  | 0.79                 |
| TS-273-500  | 500.0        | 510.4         | 230.0          | 337.0 | 445.0 | 460.0 | 31                  | 0.90                 |

# TS-2737 LEVER DISCONNECT LOCK OUT OVER TRAVEL SLIDE

## Model TS-2737

- Over travel
- Load rating (per pair)  
26–39kg (see table)
- #8(M4) pan head screw
- Lever-disconnect / Lock-out

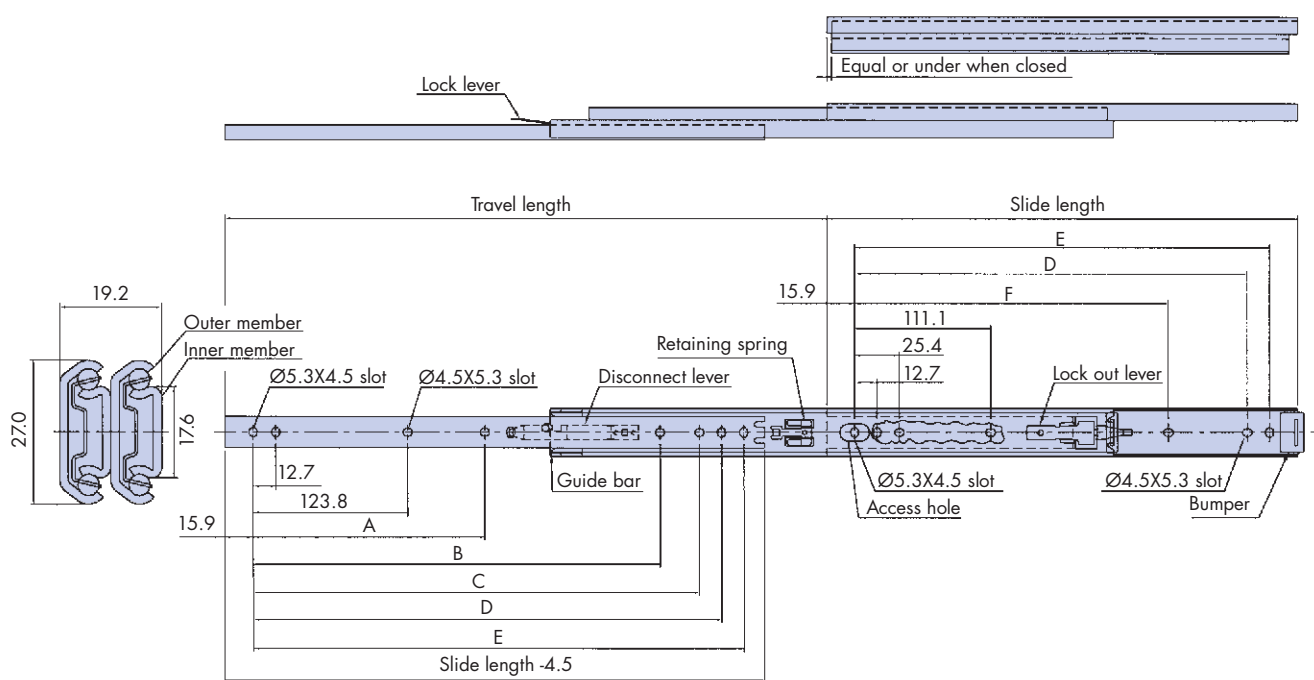


| Part number | Slide length | Travel length | Hole length mm |       |       |       |       |       | Load Rating kg/pair | Slide weight kg/pair |
|-------------|--------------|---------------|----------------|-------|-------|-------|-------|-------|---------------------|----------------------|
|             |              |               | A              | B     | C     | D     | E     | F     |                     |                      |
| TS-2737-12  | 304.8        | 327.0         | –              | –     | –     | 260.3 | 273.0 | –     | 39                  | 0.52                 |
| TS-2737-14  | 355.6        | 378.0         | –              | –     | 298.4 | 311.1 | 323.8 | –     | 37                  | 0.62                 |
| TS-2737-16  | 406.4        | 429.0         | –              | –     | 349.2 | 361.9 | 374.6 | 250.8 | 35                  | 0.73                 |
| TS-2737-18  | 457.2        | 480.0         | 212.7          | –     | 400.0 | 412.7 | 425.4 | 301.6 | 33                  | 0.81                 |
| TS-2737-20  | 508.0        | 530.0         | 238.1          | 365.1 | 450.8 | 463.5 | 476.2 | 352.4 | 31                  | 0.92                 |
| TS-2737-22  | 558.8        | 581.0         | 263.5          | 415.9 | 501.6 | 514.3 | 527.0 | 403.2 | 29                  | 1.10                 |
| TS-2737-24  | 609.6        | 632.0         | 228.9          | 466.7 | 552.4 | 565.1 | 577.8 | 454.0 | 28                  | 1.24                 |
| TS-2737-26  | 660.4        | 683.0         | 314.3          | 517.5 | 603.2 | 615.9 | 628.6 | 504.8 | 27                  | 1.34                 |
| TS-2737-28  | 711.2        | 734.0         | 339.7          | 568.3 | 654.0 | 666.7 | 679.4 | 555.6 | 26                  | 1.45                 |

## TS-3511 LINEAR MOTION SLIDE

### Model TS-3511

- Linear Motion
- Load rating (per pair)  
49kg
- #8(M4) pan head screw
- Non-disconnect

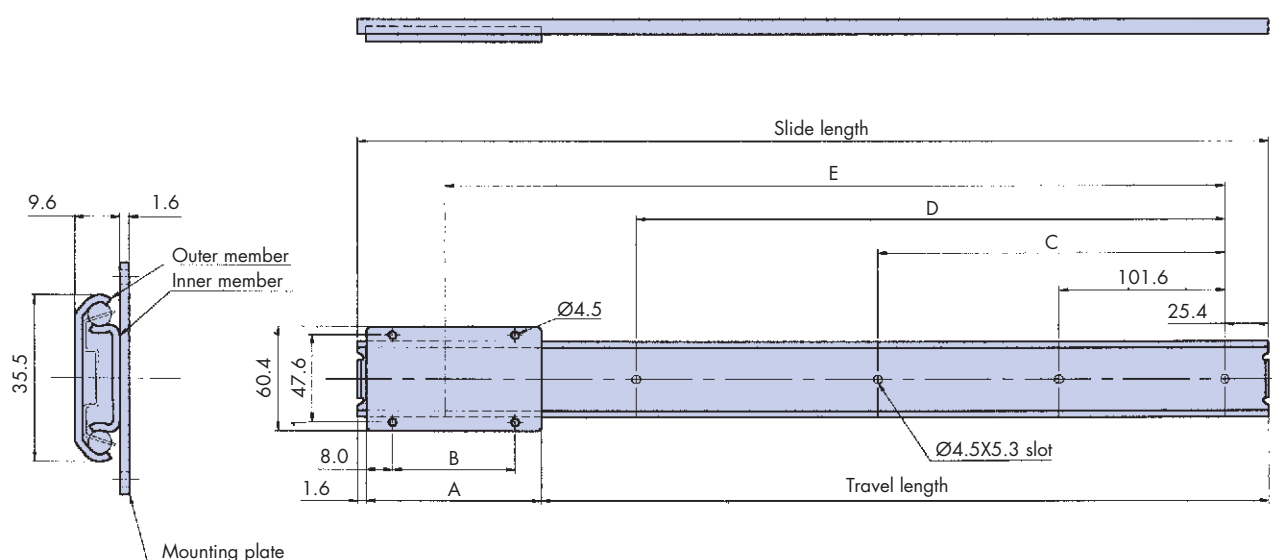**STOCK SERIES**


|             |              | X             | Y     | Z     |                |       |       |                      |
|-------------|--------------|---------------|-------|-------|----------------|-------|-------|----------------------|
|             | A =          | 76.2          | 101.6 | 127.0 |                |       |       |                      |
|             | B =          | 60.2          | 85.6  | 111.0 |                |       |       |                      |
| Part number | Slide length | Travel length |       |       | Hole length mm |       |       | Slide weight kg/pair |
|             |              |               |       |       | C              | D     | E     |                      |
| TS-3511-12  | 304.8        | 225.0         | 200.0 | 174.0 | –              | 152.4 | 254.0 | 0.56                 |
| TS-3511-14  | 355.6        | 276.0         | 251.0 | 225.0 | –              | 203.2 | 304.8 | 0.63                 |
| TS-3511-16  | 406.4        | 327.0         | 301.0 | 276.0 | –              | 254.0 | 355.6 | 0.72                 |
| TS-3511-18  | 457.2        | 378.0         | 352.0 | 327.0 | 203.2          | 304.8 | 406.4 | 0.80                 |
| TS-3511-20  | 508.0        | 428.0         | 403.0 | 378.0 | 228.6          | 355.6 | 457.2 | 0.84                 |
| TS-3511-22  | 558.8        | 479.0         | 454.0 | 428.0 | 254.0          | 406.4 | 508.0 | 0.90                 |
| TS-3511-24  | 609.6        | 530.0         | 505.0 | 479.0 | 279.4          | 457.2 | 558.8 | 1.00                 |
| TS-3511-26  | 660.4        | 581.0         | 555.0 | 530.0 | 304.8          | 508.0 | 609.6 | 1.10                 |
| TS-3511-28  | 711.2        | 632.0         | 606.0 | 581.0 | 330.2          | 558.8 | 660.4 | 1.13                 |


### Note:

When ordering please specify length of carriage after Part No. i.e. TS-3511-12-Y. We stock Y length as standard.

# TS-3520 BOTH SIDE TRAVEL SLIDE

## Model TS-3520

- Both side travel
- Load rating (per pair)  
25–49kg (see table)
- #8(M4) pan head screw
- Non-disconnect

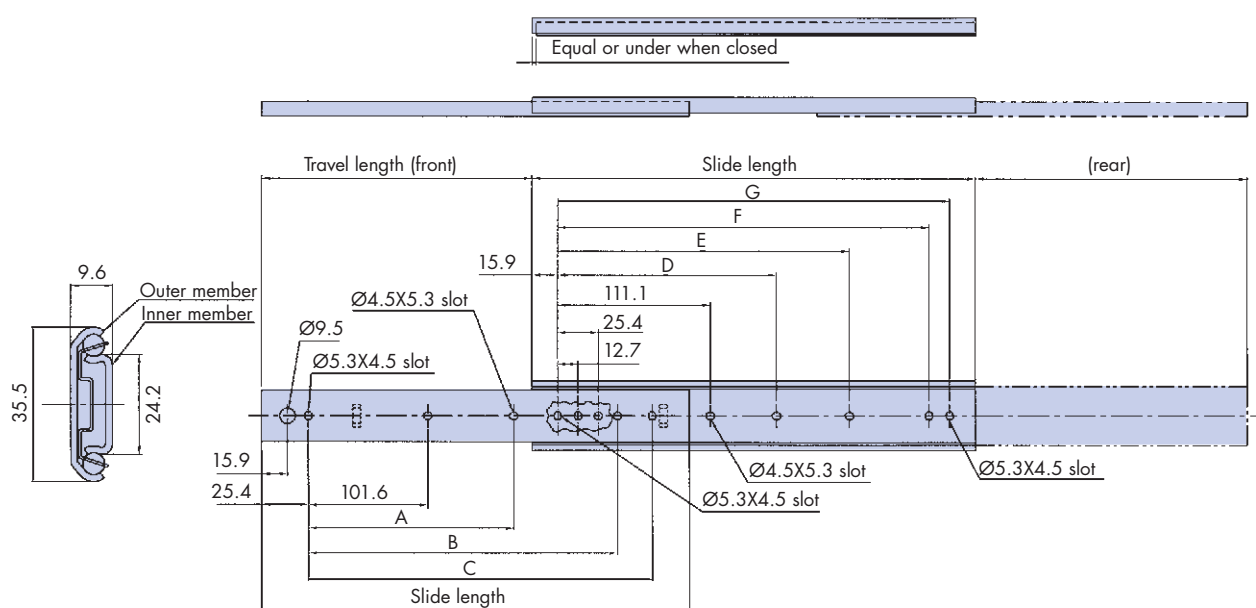


| Part number | Slide length | Travel length | Hole length mm |       |       |       |       |       |       | Load Rating kg/pair | Slide weight kg/pair |
|-------------|--------------|---------------|----------------|-------|-------|-------|-------|-------|-------|---------------------|----------------------|
|             |              |               | A              | B     | C     | D     | E     | F     | G     |                     |                      |
| TS-3520-12  | 304.8        | 224.0         | –              | 152.4 | 254.0 | –     | 149.2 | 260.3 | 273.0 | 49                  | 0.60                 |
| TS-3520-14  | 355.6        | 275.0         | –              | 203.2 | 304.8 | –     | 200.0 | 311.1 | 323.8 | 47                  | 0.70                 |
| TS-3520-16  | 406.4        | 300.0         | –              | 254.0 | 355.6 | –     | 250.8 | 361.9 | 374.6 | 43                  | 0.80                 |
| TS-3520-18  | 457.2        | 325.0         | 203.2          | 304.8 | 406.4 | 212.7 | 301.6 | 412.7 | 425.4 | 41                  | 0.90                 |
| TS-3520-20  | 508.0        | 376.0         | 228.6          | 355.6 | 457.2 | 238.1 | 352.4 | 463.5 | 476.2 | 37                  | 1.00                 |
| TS-3520-22  | 558.8        | 402.0         | 254.0          | 406.4 | 508.0 | 263.5 | 403.2 | 514.3 | 527.0 | 34                  | 1.10                 |
| TS-3520-24  | 609.6        | 427.0         | 279.4          | 457.2 | 558.8 | 228.9 | 454.0 | 565.1 | 577.8 | 30                  | 1.20                 |
| TS-3520-26  | 660.4        | 478.0         | 304.8          | 508.0 | 609.6 | 314.3 | 504.8 | 615.9 | 628.6 | 27                  | 1.25                 |
| TS-3520-28  | 711.2        | 503.0         | 330.2          | 558.8 | 660.4 | 339.7 | 555.6 | 666.7 | 679.4 | 25                  | 1.34                 |

## TS-3521 3/4 TRAVEL SLIDE

## Model TS-3521

- 3/4 travel
- Load rating (per pair)  
25–49kg (see table)
- #8(M4) pan head screw
- Non-disconnect

STOCK SERIES

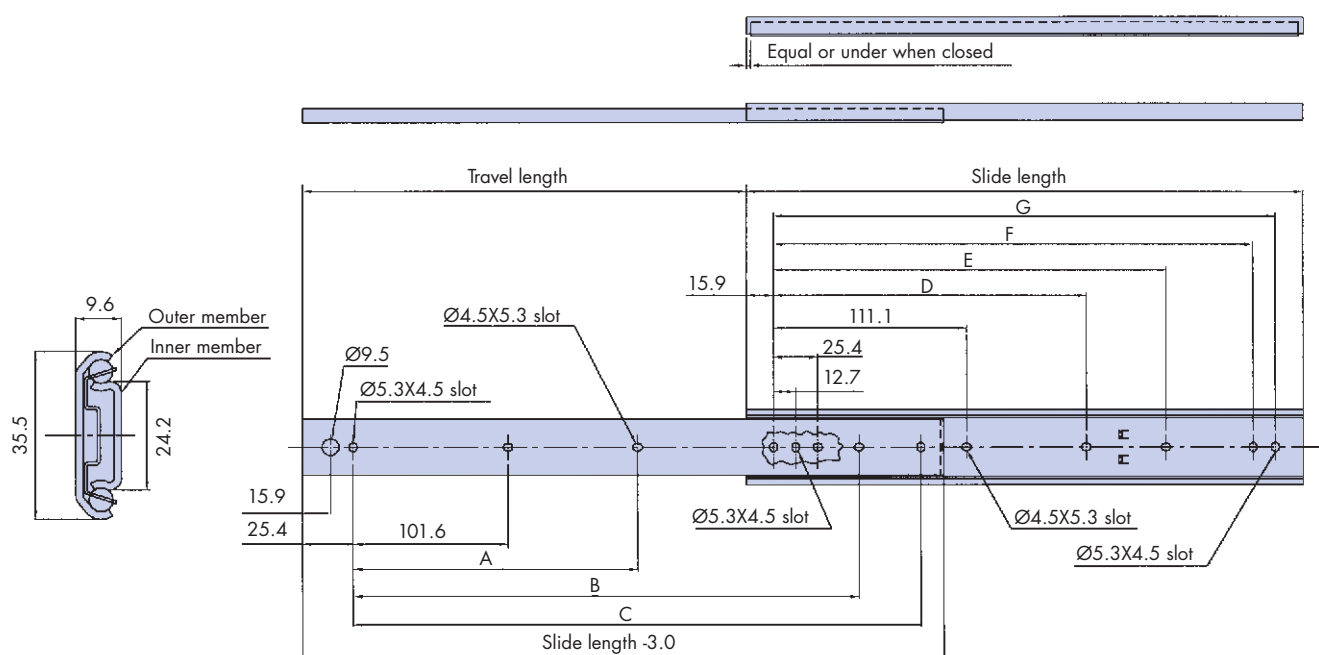

| Part number | Slide length | Travel length | Hole length mm |       |       |       |       |       |       | Load Rating kg/pair | Slide weight kg/pair |
|-------------|--------------|---------------|----------------|-------|-------|-------|-------|-------|-------|---------------------|----------------------|
|             |              |               | A              | B     | C     | D     | E     | F     | G     |                     |                      |
| TS-3521-12  | 304.8        | 226.0         | –              | 152.4 | 254.0 | –     | 149.2 | 260.3 | 273.0 | 49                  | 0.60                 |
| TS-3521-14  | 355.6        | 277.0         | –              | 203.2 | 304.8 | –     | 200.0 | 311.1 | 323.8 | 47                  | 0.70                 |
| TS-3521-16  | 406.4        | 302.0         | –              | 254.0 | 355.6 | –     | 250.8 | 361.9 | 374.6 | 43                  | 0.80                 |
| TS-3521-18  | 457.2        | 328.0         | 203.2          | 304.8 | 406.4 | 212.7 | 301.6 | 412.7 | 425.4 | 41                  | 0.90                 |
| TS-3521-20  | 508.0        | 379.0         | 228.6          | 355.6 | 457.2 | 238.1 | 352.4 | 463.5 | 476.2 | 37                  | 1.00                 |
| TS-3521-22  | 558.8        | 404.0         | 254.0          | 406.4 | 508.0 | 263.5 | 403.2 | 514.3 | 527.0 | 34                  | 1.10                 |
| TS-3521-24  | 609.6        | 430.0         | 279.4          | 457.2 | 558.8 | 228.9 | 454.0 | 565.1 | 577.8 | 30                  | 1.20                 |
| TS-3521-26  | 660.4        | 480.0         | 304.8          | 508.0 | 609.6 | 314.3 | 504.8 | 615.9 | 628.6 | 27                  | 1.25                 |
| TS-3521-28  | 711.2        | 506.0         | 330.2          | 558.8 | 660.4 | 339.7 | 555.6 | 666.7 | 679.4 | 25                  | 1.34                 |

# TS-3525 LEVER DISCONNECT LOCK OUT 3/4 TRAVEL SLIDE



## Model TS-3525

- 3/4 travel
- Load rating (per pair)  
25–45kg (see table)
- #8(M4) pan head screw
- Lever-disconnect / Lock-out

## Model TS-3524

- 3524 version has no lock out

STOCK SERIES

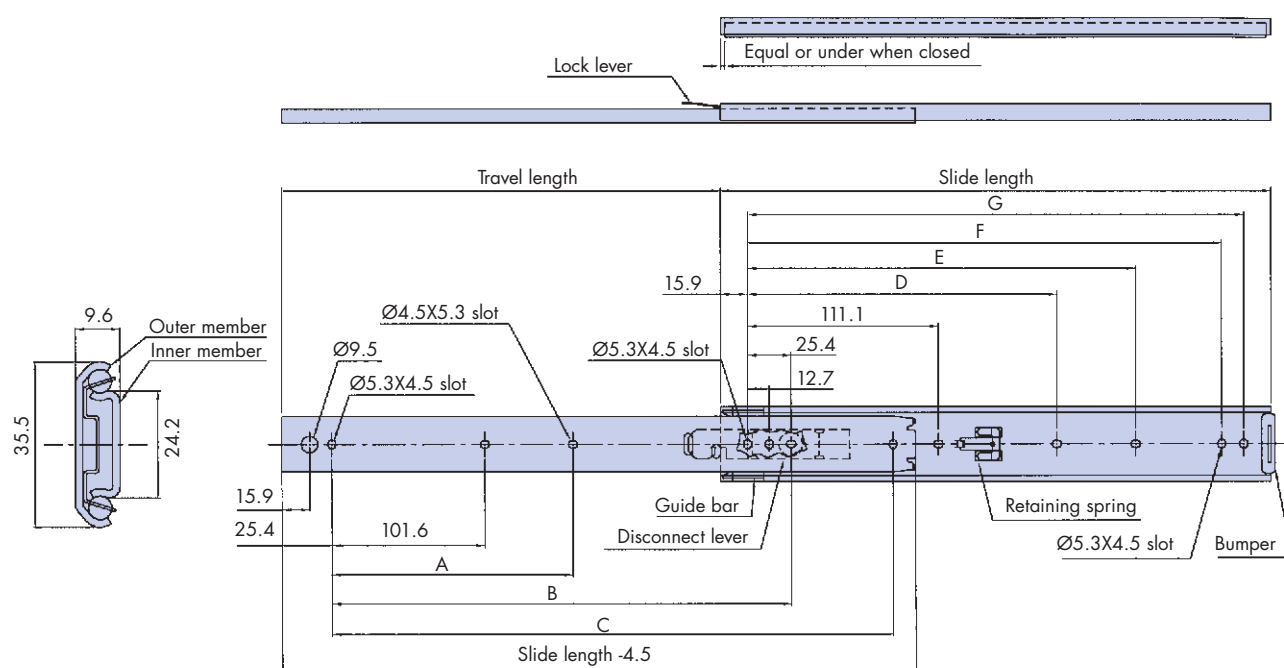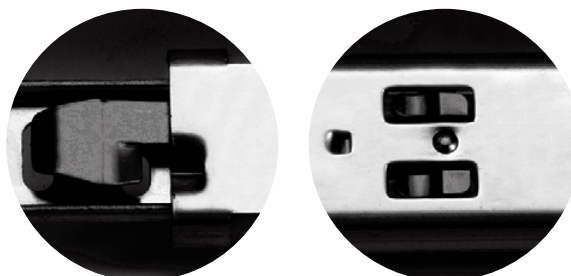



| Part number              | Slide length | Travel length | Hole length mm |       |       |       |       |       |       | Load Rating kg/pair | Slide weight kg/pair |
|--------------------------|--------------|---------------|----------------|-------|-------|-------|-------|-------|-------|---------------------|----------------------|
|                          |              |               | A              | B     | C     | D     | E     | F     | G     |                     |                      |
| TS-3525-12<br>TS-3524-12 | 304.8        | 203.0         | –              | 215.9 | 254.0 | –     | 149.2 | 260.3 | 273.0 | 45                  | 0.61                 |
| TS-3525-14<br>TS-3524-14 | 355.6        | 254.4         | –              | 266.7 | 304.8 | –     | 200.0 | 311.1 | 323.8 | 43                  | 0.72                 |
| TS-3525-16<br>TS-3524-16 | 406.4        | 305.2         | –              | 317.5 | 355.6 | –     | 250.8 | 361.9 | 374.6 | 41                  | 0.81                 |
| TS-3525-18<br>TS-3524-18 | 457.2        | 330.6         | 203.2          | 342.9 | 406.4 | 212.7 | 301.6 | 412.7 | 425.4 | 39                  | 0.91                 |
| TS-3525-20<br>TS-3524-20 | 508.0        | 381.4         | 228.6          | 393.7 | 457.2 | 238.1 | 352.4 | 463.5 | 476.2 | 37                  | 1.00                 |
| TS-3525-22<br>TS-3524-22 | 558.8        | 406.4         | 254.0          | 418.7 | 508.0 | 263.5 | 403.2 | 514.3 | 527.0 | 33                  | 1.23                 |
| TS-3525-24<br>TS-3524-24 | 609.6        | 432.2         | 279.4          | 444.5 | 558.8 | 228.9 | 454.0 | 565.1 | 577.8 | 30                  | 1.32                 |
| TS-3525-26<br>TS-3524-26 | 660.4        | 483.0         | 304.8          | 495.3 | 609.6 | 314.3 | 504.8 | 615.9 | 628.6 | 27                  | 1.41                 |
| TS-3525-28<br>TS-3524-28 | 711.2        | 508.0         | 330.2          | 520.3 | 660.4 | 339.7 | 555.6 | 666.7 | 679.4 | 25                  | 1.51                 |

## TS-3535 LEVER DISCONNECT LOCK OUT OVER TRAVEL SLIDE

## Model TS-3535

- Over travel
- Load rating (per pair)  
41–54kg (see table)
- #8(M4) pan head screw
- Lever-disconnect / Lock-out

STOCK SERIES

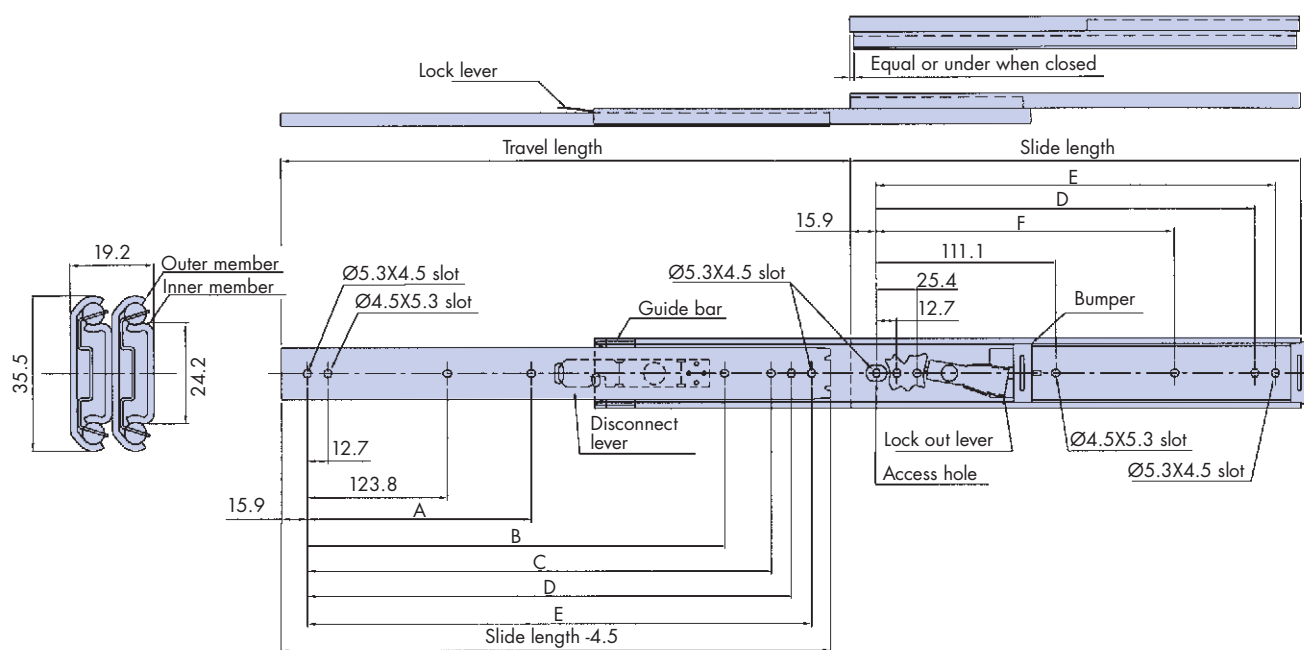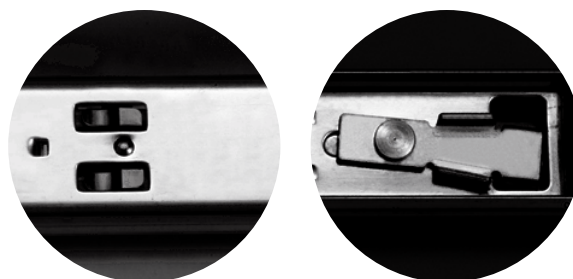


| Part number | Slide length | Travel length | Hole length mm |       |       |       |       |       | Load Rating kg/pair | Slide weight kg/pair |
|-------------|--------------|---------------|----------------|-------|-------|-------|-------|-------|---------------------|----------------------|
|             |              |               | A              | B     | C     | D     | E     | F     |                     |                      |
| TS-3535-12  | 304.8        | 327.0         | –              | –     | –     | 260.3 | 273.0 | –     | 54                  | 0.61                 |
| TS-3535-14  | 355.6        | 378.0         | –              | –     | 298.4 | 311.1 | 323.8 | –     | 53                  | 0.72                 |
| TS-3535-16  | 406.4        | 429.0         | –              | –     | 349.2 | 361.9 | 374.6 | 250.8 | 51                  | 0.81                 |
| TS-3535-18  | 457.2        | 480.0         | 212.7          | –     | 400.0 | 412.7 | 425.4 | 301.6 | 50                  | 0.91                 |
| TS-3535-20  | 508.0        | 530.0         | 238.1          | 365.1 | 450.8 | 463.5 | 476.2 | 352.4 | 48                  | 1.00                 |
| TS-3535-22  | 558.8        | 581.0         | 263.5          | 415.9 | 501.6 | 514.3 | 527.0 | 403.2 | 47                  | 1.23                 |
| TS-3535-24  | 609.6        | 632.0         | 228.9          | 466.7 | 552.4 | 565.1 | 577.8 | 454.0 | 45                  | 1.32                 |
| TS-3535-26  | 660.4        | 683.0         | 314.3          | 517.5 | 603.2 | 615.9 | 628.6 | 504.8 | 43                  | 1.41                 |
| TS-3535-28  | 711.2        | 734.0         | 339.7          | 568.3 | 654.0 | 666.7 | 679.4 | 555.6 | 41                  | 1.51                 |

# TS-3531 OVER TRAVEL SLIDE

## Model TS-3531

- Over travel
- Load rating (per pair)  
45–60kg (see table)
- #8(M4) pan head screw
- Non-disconnect

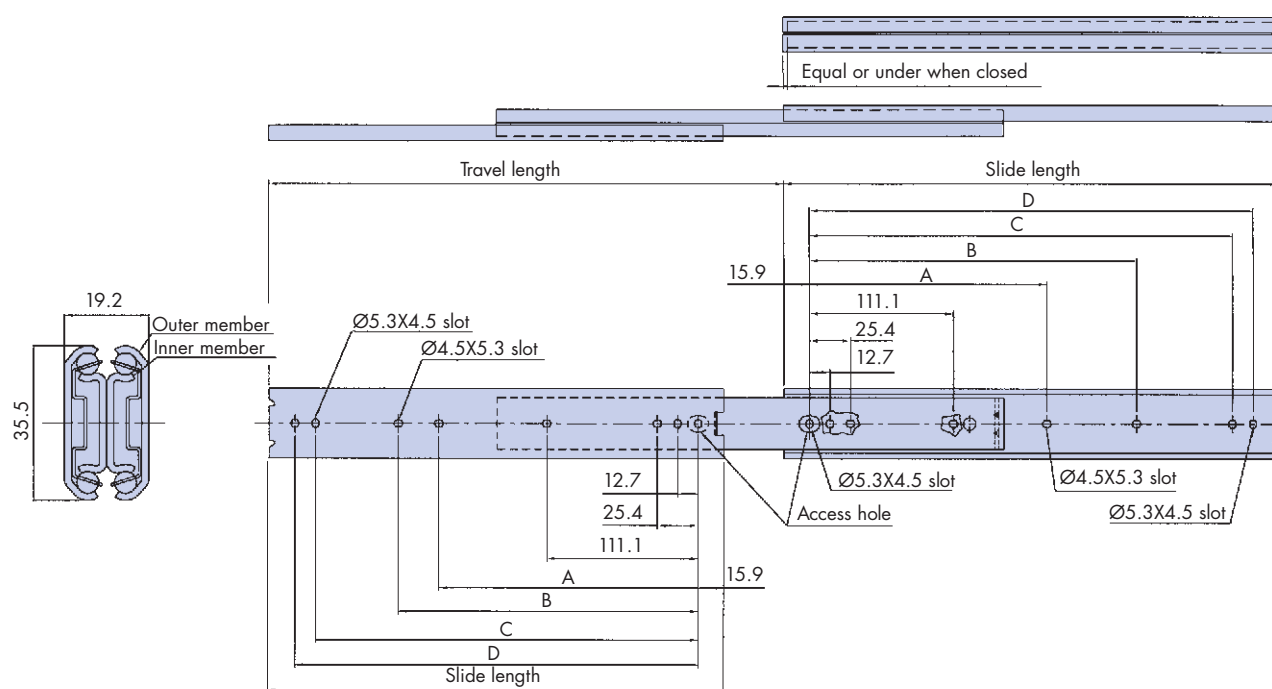**STOCK SERIES**


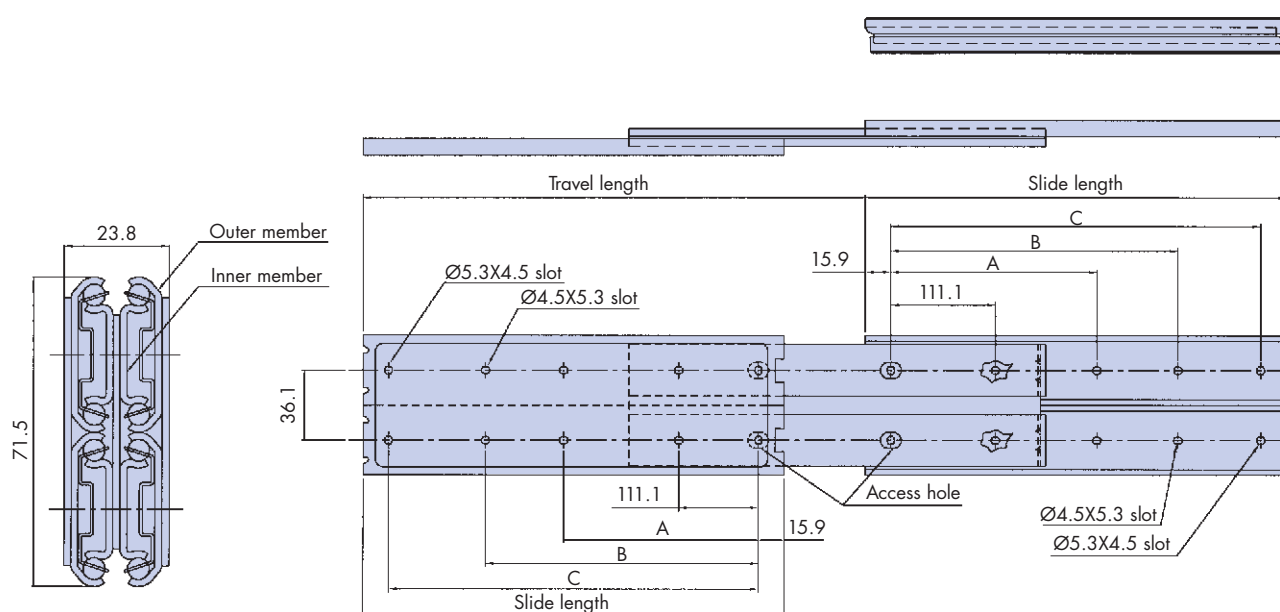
| Part number | Slide length | Travel length | Hole length mm |       |       |       | Load Rating kg/pair | Slide weight kg/pair |
|-------------|--------------|---------------|----------------|-------|-------|-------|---------------------|----------------------|
|             |              |               | A              | B     | C     | D     |                     |                      |
| TS-3531-12  | 304.8        | 326.0         | –              | 149.2 | 260.3 | 273.0 | 60                  | 1.31                 |
| TS-3531-14  | 355.6        | 377.0         | –              | 200.0 | 311.1 | 323.8 | 59                  | 1.62                 |
| TS-3531-16  | 406.4        | 428.0         | –              | 250.8 | 361.9 | 374.6 | 57                  | 1.81                 |
| TS-3531-18  | 457.2        | 479.0         | 212.7          | 301.6 | 412.7 | 425.4 | 56                  | 2.00                 |
| TS-3531-20  | 508.0        | 529.0         | 238.1          | 352.4 | 463.5 | 476.2 | 53                  | 2.33                 |
| TS-3531-22  | 558.8        | 580.0         | 263.5          | 403.2 | 514.3 | 527.0 | 51                  | 2.53                 |
| TS-3531-24  | 609.6        | 631.0         | 288.9          | 454.0 | 565.1 | 577.8 | 49                  | 2.72                 |
| TS-3531-26  | 660.4        | 682.0         | 314.3          | 504.8 | 615.9 | 628.6 | 47                  | 2.92                 |
| TS-3531-28  | 711.2        | 732.0         | 339.7          | 555.6 | 666.7 | 679.4 | 45                  | 3.10                 |

# TS-3561 OVER TRAVEL FOR HEAVY DUTY APPLICATIONS

## Model TS-3561

STOCK SERIES

- Over travel
- Load rating (per pair)  
190–280kg (see table)
- #8(M4) pan head screw
- Non-disconnect




| Part number | Slide length | Travel length | Hole length mm |       |       | Load Rating kg/pair | Slide weight kg/pair |
|-------------|--------------|---------------|----------------|-------|-------|---------------------|----------------------|
|             |              |               | A              | B     | C     |                     |                      |
| TS-3561-12  | 304.8        | 326.0         | –              | 149.2 | 273.0 | 280                 | 3.91                 |
| TS-3561-14  | 355.6        | 377.0         | –              | 200.0 | 323.8 | 275                 | 4.62                 |
| TS-3561-16  | 406.4        | 428.0         | –              | 250.8 | 374.6 | 265                 | 5.31                 |
| TS-3561-18  | 457.2        | 479.0         | 212.7          | 301.6 | 425.4 | 256                 | 5.90                 |
| TS-3561-20  | 508.0        | 529.0         | 238.1          | 352.4 | 476.2 | 246                 | 6.61                 |
| TS-3561-22  | 558.8        | 580.0         | 263.5          | 403.2 | 527.0 | 235                 | 7.42                 |
| TS-3561-24  | 609.6        | 631.0         | 288.9          | 454.0 | 577.8 | 222                 | 7.90                 |
| TS-3561-26  | 660.4        | 682.0         | 314.3          | 504.8 | 628.6 | 205                 | 8.60                 |
| TS-3561-28  | 711.2        | 732.0         | 339.7          | 555.6 | 679.4 | 190                 | 9.20                 |



## TS-352 LEVER DISCONNECT OVER TRAVEL SLIDE

### Model TS-352

- Over travel
- Load rating (per pair)  
23–31kg (see table)
- #8(M4) pan head screw
- Lever disconnect


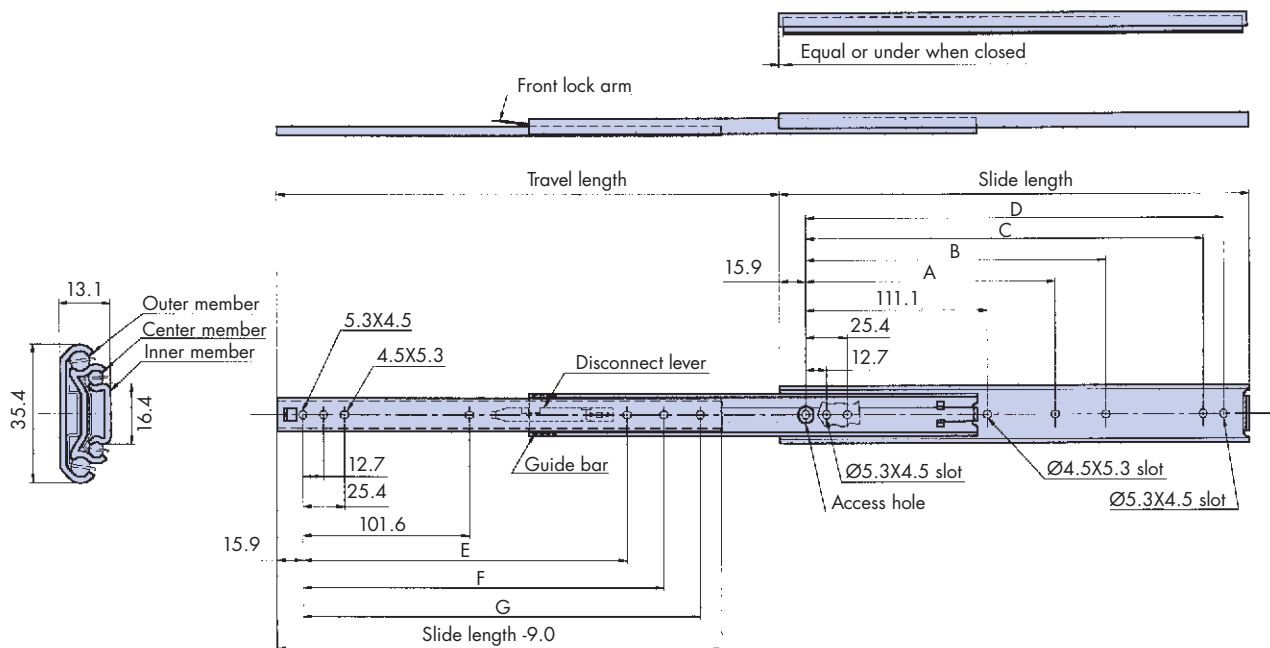


| Part number | Slide length | Travel length | Hole length mm |       |       |       |       |       |       | Load Rating kg/pair | Slide weight kg/pair |
|-------------|--------------|---------------|----------------|-------|-------|-------|-------|-------|-------|---------------------|----------------------|
|             |              |               | A              | B     | C     | D     | E     | F     | G     |                     |                      |
| TS-352-8    | 203.2        | 214.0         | –              | –     | 158.7 | 171.4 | –     | –     | 152.4 | 31                  | 0.50                 |
| TS-352-10   | 254.0        | 265.0         | –              | –     | 209.5 | 222.2 | –     | –     | 203.2 | 30                  | 0.64                 |
| TS-352-12   | 304.8        | 316.0         | –              | 149.2 | 260.3 | 273.0 | –     | –     | 254.0 | 29                  | 0.73                 |
| TS-352-14   | 355.6        | 366.0         | –              | 200.0 | 311.1 | 323.8 | –     | –     | 304.8 | 28                  | 0.85                 |
| TS-352-16   | 406.4        | 417.0         | –              | 250.8 | 361.9 | 374.6 | –     | –     | 355.6 | 27                  | 0.98                 |
| TS-352-18   | 457.2        | 468.0         | 212.7          | 301.6 | 412.7 | 425.4 | 207.7 | –     | 406.4 | 26                  | 1.11                 |
| TS-352-20   | 508.0        | 519.0         | 238.1          | 352.4 | 463.5 | 476.2 | 233.1 | 355.6 | 457.2 | 25                  | 1.23                 |
| TS-352-22   | 558.8        | 570.0         | 263.5          | 403.2 | 514.3 | 527.0 | 258.5 | 406.4 | 508.0 | 24                  | 1.35                 |
| TS-352-24   | 609.6        | 620.0         | 288.9          | 454.0 | 565.1 | 577.8 | 283.9 | 457.2 | 558.8 | 23                  | 1.46                 |

# TS-355 LEVER DISCONNECT LOCK OUT OVER TRAVEL SLIDE

## Model TS-355

- Over travel
- Load rating (per pair)  
23–31kg (see table)
- #8(M4) pan head screw
- Lever disconnect / Lock-out

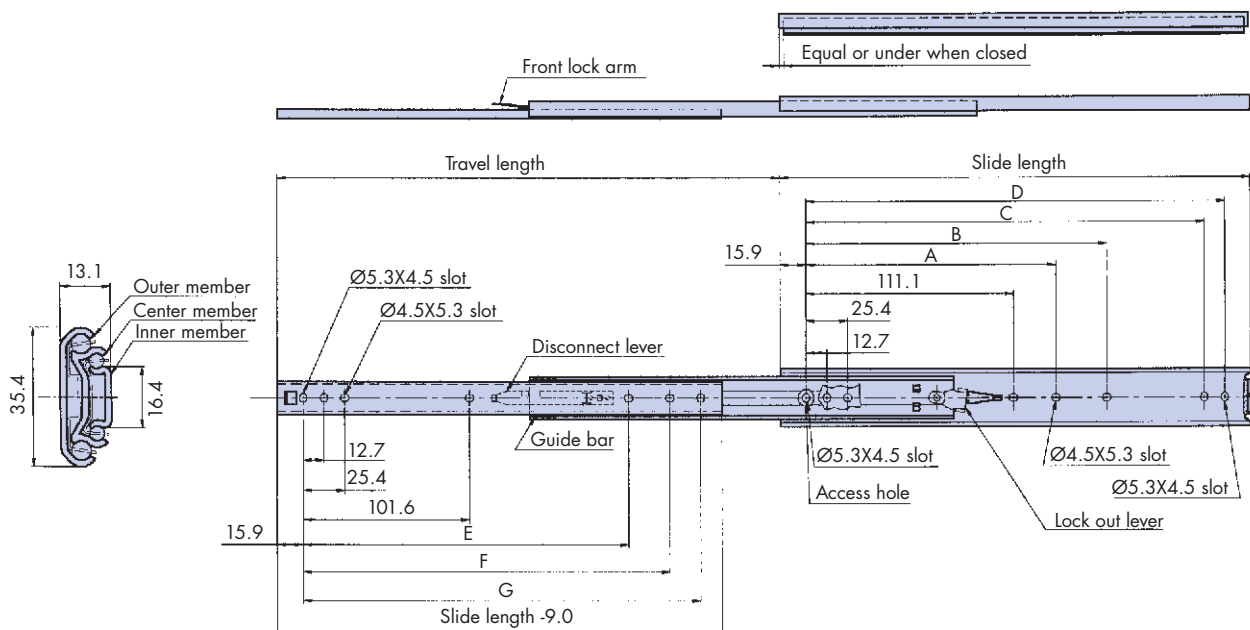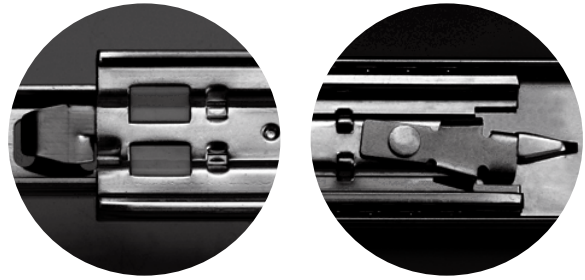


| Part number | Slide length | Travel length | Hole length mm |       |       |       |       |       |       | Load Rating kg/pair | Slide weight kg/pair |
|-------------|--------------|---------------|----------------|-------|-------|-------|-------|-------|-------|---------------------|----------------------|
|             |              |               | A              | B     | C     | D     | E     | F     | G     |                     |                      |
| TS-355-8    | 203.2        | 214.0         | –              | –     | 158.7 | 171.4 | –     | –     | 152.4 | 31                  | 0.50                 |
| TS-355-10   | 254.0        | 265.0         | –              | –     | 209.5 | 222.2 | –     | –     | 203.2 | 30                  | 0.64                 |
| TS-355-12   | 304.8        | 316.0         | –              | –     | 260.3 | 273.0 | –     | –     | 254.0 | 29                  | 0.73                 |
| TS-355-14   | 355.6        | 366.0         | –              | 200.0 | 311.1 | 323.8 | –     | –     | 304.8 | 28                  | 0.85                 |
| TS-355-16   | 406.4        | 417.0         | –              | 250.8 | 361.9 | 374.6 | –     | –     | 355.6 | 27                  | 0.98                 |
| TS-355-18   | 457.2        | 468.0         | 212.7          | 301.6 | 412.7 | 425.4 | 207.7 | –     | 406.4 | 26                  | 1.11                 |
| TS-355-20   | 508.0        | 519.0         | 238.1          | 352.4 | 463.5 | 476.2 | 233.1 | 355.6 | 457.2 | 25                  | 1.23                 |
| TS-355-22   | 558.8        | 570.0         | 263.5          | 403.2 | 514.3 | 527.0 | 258.5 | 406.4 | 508.0 | 24                  | 1.35                 |
| TS-355-24   | 609.6        | 620.0         | 288.9          | 454.0 | 565.1 | 577.8 | 283.9 | 457.2 | 558.8 | 23                  | 1.46                 |

## TS-470 OVER TRAVEL COMPACT SLIDE

### Model TS-470

- Over travel
- Load rating (per pair)  
54–76kg (see table)
- #8(M4) pan head screw
- Non-disconnect

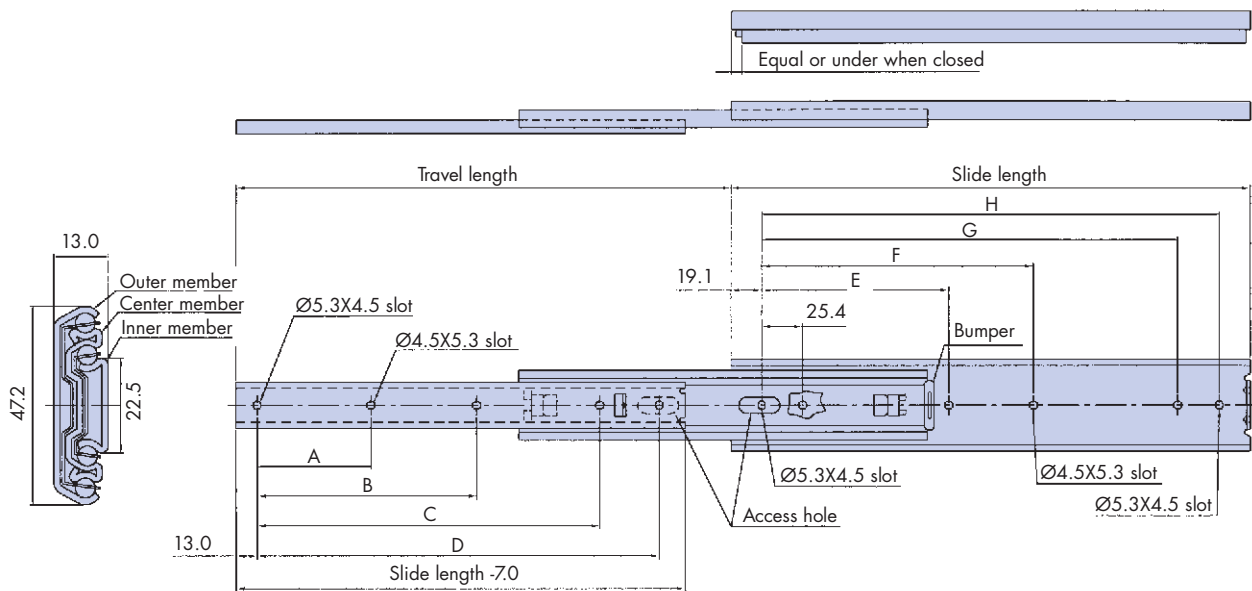


| Part number | Slide length | Travel length | Hole length mm |       |       |       |       |       |       |       | Load Rating kg/pair | Slide weight kg/pair |
|-------------|--------------|---------------|----------------|-------|-------|-------|-------|-------|-------|-------|---------------------|----------------------|
|             |              |               | A              | B     | C     | D     | E     | F     | G     | H     |                     |                      |
| TS-470-12   | 304.8        | 330.0         | 76.2           | 177.8 | 228.6 | 254.0 | 88.9  | 177.8 | 241.3 | 266.7 | 76                  | 1.15                 |
| TS-470-14   | 355.6        | 381.0         | 101.6          | 215.9 | 279.4 | 304.8 | 101.6 | 215.9 | 292.1 | 317.5 | 74                  | 1.37                 |
| TS-470-16   | 406.4        | 432.0         | 114.3          | 241.3 | 330.2 | 355.6 | 127.0 | 241.3 | 342.9 | 368.3 | 70                  | 1.55                 |
| TS-470-18   | 457.2        | 483.0         | 139.7          | 279.4 | 381.0 | 406.4 | 139.7 | 279.4 | 393.7 | 419.1 | 66                  | 1.77                 |
| TS-470-20   | 508.0        | 533.0         | 152.4          | 317.5 | 431.8 | 457.2 | 152.4 | 317.5 | 444.5 | 469.9 | 63                  | 1.95                 |
| TS-470-22   | 558.8        | 584.0         | 177.8          | 355.6 | 482.6 | 508.0 | 177.8 | 342.9 | 495.3 | 520.7 | 61                  | 2.15                 |
| TS-470-24   | 609.6        | 635.0         | 190.5          | 381.0 | 533.4 | 558.8 | 190.5 | 381.0 | 546.1 | 571.5 | 58                  | 2.35                 |
| TS-470-26   | 660.4        | 686.0         | 203.2          | 419.1 | 584.2 | 609.6 | 203.2 | 419.1 | 596.9 | 622.3 | 56                  | 2.60                 |
| TS-470-28   | 711.2        | 737.0         | 228.6          | 457.2 | 635.0 | 660.4 | 228.6 | 444.5 | 647.1 | 673.1 | 54                  | 2.75                 |

# TS-472 LEVER DISCONNECT OVER TRAVEL SLIDE

## Model TS-472

- Over travel
- Load rating (per pair)  
52–74kg (see table)
- #8(M4) pan head screw
- Lever disconnect

STOCK SERIES

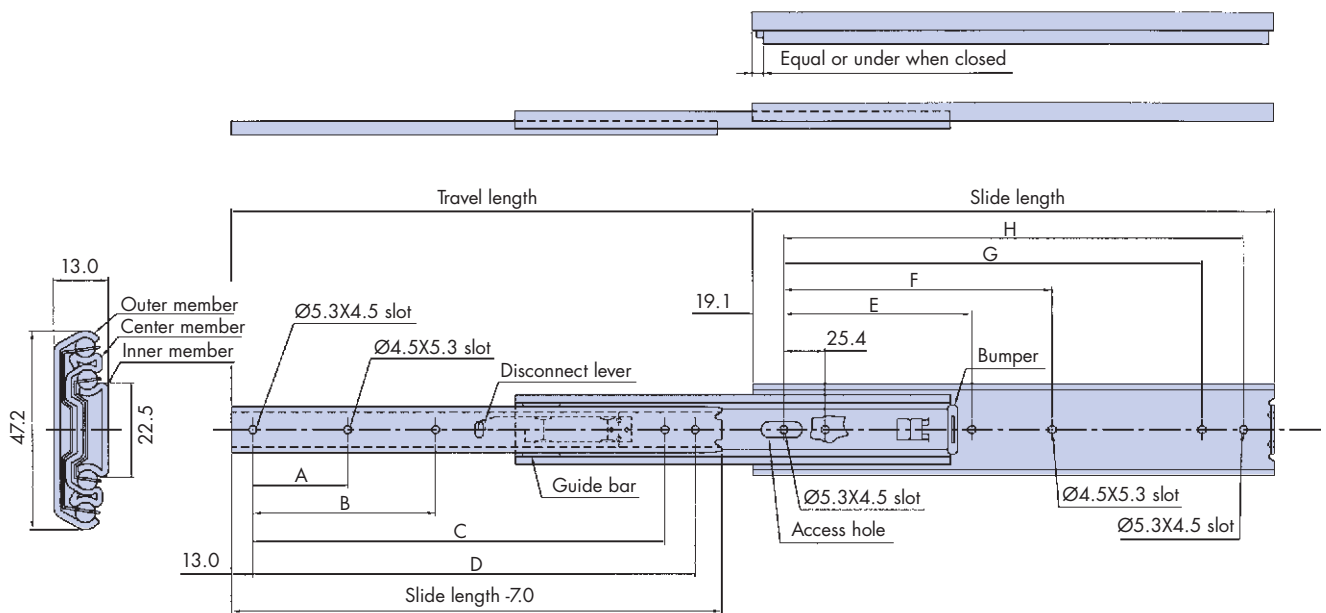



| Part number | Slide length | Travel length | Hole length mm |       |       |       |       |       |       |       | Load Rating kg/pair | Slide weight kg/pair |
|-------------|--------------|---------------|----------------|-------|-------|-------|-------|-------|-------|-------|---------------------|----------------------|
|             |              |               | A              | B     | C     | D     | E     | F     | G     | H     |                     |                      |
| TS-472-12   | 304.8        | 330.0         | 76.2           | –     | 228.6 | 254.0 | 88.9  | 177.8 | 241.3 | 266.7 | 74                  | 1.20                 |
| TS-472-14   | 355.6        | 381.0         | 101.6          | –     | 279.4 | 304.8 | 101.6 | 215.9 | 292.1 | 317.5 | 72                  | 1.42                 |
| TS-472-16   | 406.4        | 432.0         | 114.3          | –     | 330.2 | 355.6 | 127.0 | 241.3 | 342.9 | 368.3 | 68                  | 1.60                 |
| TS-472-18   | 457.2        | 483.0         | 139.7          | –     | 381.0 | 406.4 | 139.7 | 279.4 | 393.7 | 419.1 | 64                  | 1.82                 |
| TS-472-20   | 508.0        | 533.0         | 152.4          | –     | 431.8 | 457.2 | 152.4 | 317.5 | 444.5 | 469.9 | 62                  | 2.00                 |
| TS-472-22   | 558.8        | 584.0         | 177.8          | –     | 482.6 | 508.0 | 177.8 | 342.9 | 495.3 | 520.7 | 59                  | 2.20                 |
| TS-472-24   | 609.6        | 635.0         | 190.5          | –     | 533.4 | 558.8 | 190.5 | 381.0 | 546.1 | 571.5 | 57                  | 2.40                 |
| TS-472-26   | 660.4        | 686.0         | 203.2          | 419.1 | 584.2 | 609.6 | 203.2 | 419.1 | 596.9 | 622.3 | 55                  | 2.65                 |
| TS-472-28   | 711.2        | 737.0         | 228.6          | 457.2 | 635.0 | 660.4 | 228.6 | 444.5 | 647.1 | 673.1 | 52                  | 2.80                 |

# TS-475 LEVER DISCONNECT LOCK OUT OVER TRAVEL SLIDE

## Model TS-475

- Over travel
- Load rating (per pair)  
52-74kg (see table)
- #8(M4) pan head screw
- Lever disconnect / Lock-out

STOCK SERIES

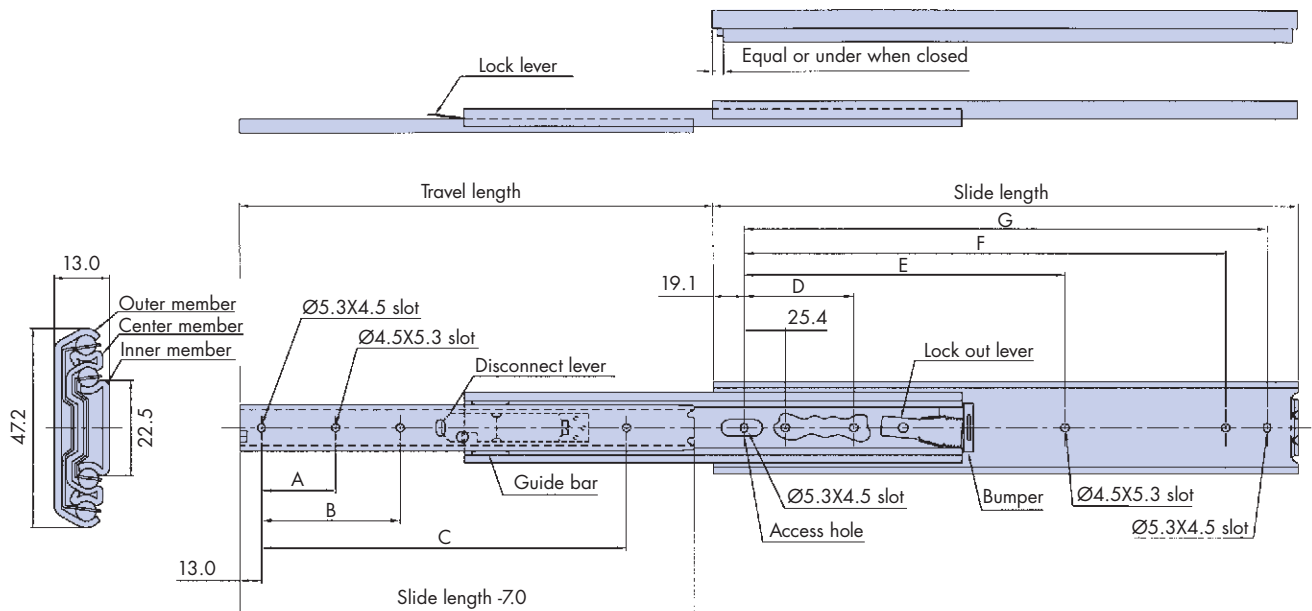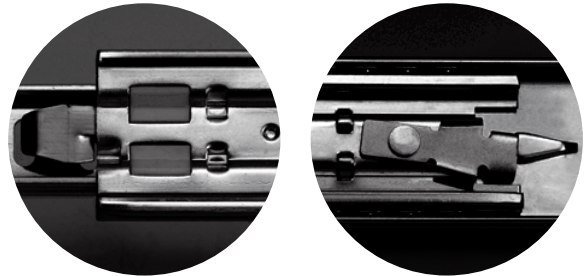


| Part number | Slide length | Travel length | Hole length mm |       |       |       |       |       |       | Load Rating kg/pair | Slide weight kg/pair |
|-------------|--------------|---------------|----------------|-------|-------|-------|-------|-------|-------|---------------------|----------------------|
|             |              |               | A              | B     | C     | D     | E     | F     | G     |                     |                      |
| TS-475-12   | 304.8        | 330.0         | 76.2           | -     | 228.6 | 88.9  | 177.8 | 241.3 | 266.7 | 74                  | 1.20                 |
| TS-475-14   | 355.6        | 381.0         | 101.6          | -     | 279.4 | 101.6 | 215.9 | 292.1 | 317.5 | 72                  | 1.42                 |
| TS-475-16   | 406.4        | 432.0         | 114.3          | -     | 330.2 | 127.0 | 241.3 | 342.9 | 368.3 | 68                  | 1.60                 |
| TS-475-18   | 457.2        | 483.0         | 139.7          | -     | 381.0 | 139.7 | 279.4 | 393.7 | 419.1 | 64                  | 1.82                 |
| TS-475-20   | 508.0        | 533.0         | 152.4          | -     | 431.8 | 152.4 | 317.5 | 444.5 | 469.9 | 62                  | 2.00                 |
| TS-475-22   | 558.8        | 584.0         | 177.8          | -     | 482.6 | 177.8 | 342.9 | 495.3 | 520.7 | 59                  | 2.20                 |
| TS-475-24   | 609.6        | 635.0         | 190.5          | -     | 533.4 | 190.5 | 381.0 | 546.1 | 571.5 | 57                  | 2.40                 |
| TS-475-26   | 660.4        | 686.0         | 203.2          | 419.1 | 584.2 | 203.2 | 419.1 | 596.9 | 622.3 | 55                  | 2.65                 |
| TS-475-28   | 711.2        | 737.0         | 228.6          | 457.2 | 635.0 | 228.6 | 444.5 | 647.7 | 673.1 | 52                  | 2.80                 |

## TS-550 OVER TRAVEL HEAVY DUTY SLIDE

## Model TS-550

- Over travel
- Load rating (per pair)  
74–94kg (see table)
- #8(M4) pan head screw
- Non-disconnect

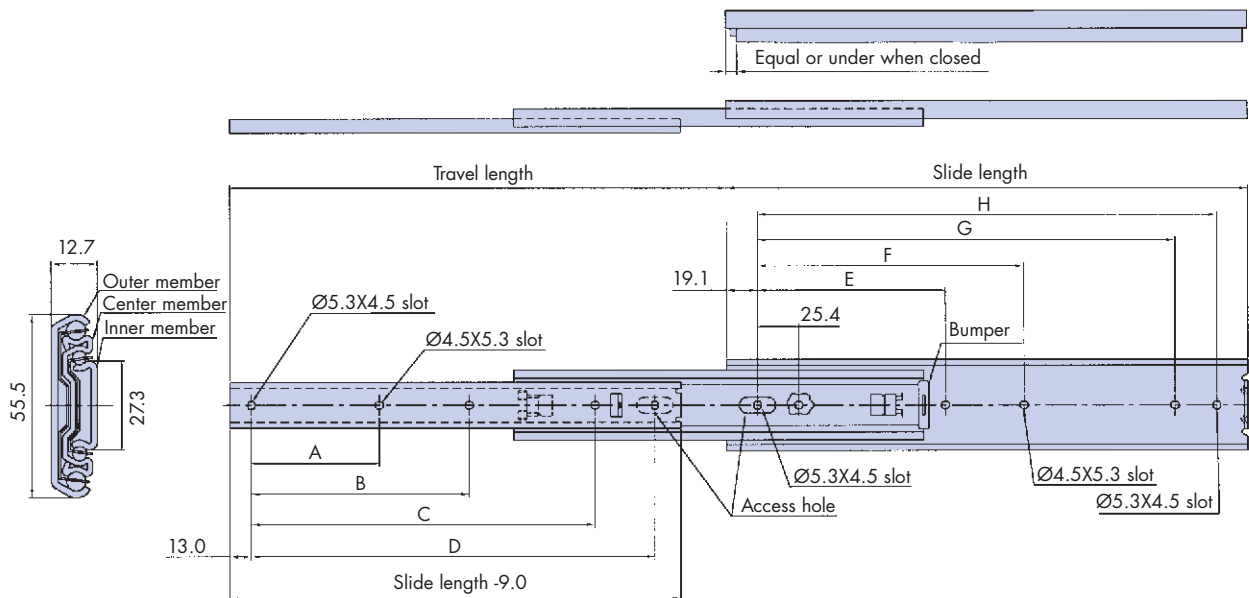


| Part number | Slide length | Travel length | Hole length mm |       |       |       |       |       |       |       | Load Rating kg/pair | Slide weight kg/pair |
|-------------|--------------|---------------|----------------|-------|-------|-------|-------|-------|-------|-------|---------------------|----------------------|
|             |              |               | A              | B     | C     | D     | E     | F     | G     | H     |                     |                      |
| TS-550-12   | 304.8        | 330.0         | 76.2           | 177.8 | 228.6 | 254.0 | 88.9  | 177.8 | 241.3 | 266.7 | 94                  | 1.30                 |
| TS-550-14   | 355.6        | 381.0         | 101.6          | 215.9 | 279.4 | 304.8 | 101.6 | 215.9 | 292.1 | 317.5 | 92                  | 1.51                 |
| TS-550-16   | 406.4        | 432.0         | 114.3          | 241.3 | 330.2 | 355.6 | 127.0 | 241.3 | 342.9 | 368.3 | 89                  | 1.70                 |
| TS-550-18   | 457.2        | 483.0         | 139.7          | 279.4 | 381.0 | 406.4 | 139.7 | 279.4 | 393.7 | 419.1 | 86                  | 1.92                 |
| TS-550-20   | 508.0        | 533.0         | 152.4          | 317.5 | 431.8 | 457.2 | 152.4 | 317.5 | 444.5 | 469.9 | 84                  | 2.10                 |
| TS-550-22   | 558.8        | 584.0         | 177.8          | 355.6 | 482.6 | 508.0 | 177.8 | 342.9 | 495.3 | 520.7 | 81                  | 2.30                 |
| TS-550-24   | 609.6        | 635.0         | 190.5          | 381.0 | 533.4 | 558.8 | 190.5 | 381.0 | 546.1 | 571.5 | 79                  | 2.40                 |
| TS-550-26   | 660.4        | 686.0         | 203.2          | 419.1 | 584.2 | 609.6 | 203.2 | 419.1 | 596.9 | 622.3 | 76                  | 2.75                 |
| TS-550-28   | 711.2        | 737.0         | 228.6          | 457.2 | 635.0 | 660.4 | 228.6 | 444.5 | 647.7 | 673.1 | 74                  | 2.92                 |

## TS-552 LEVER DISCONNECT OVER TRAVEL HEAVY DUTY SLIDE

## Model TS-552

- Over travel
- Load rating (per pair)  
72–90kg (see table)
- #8(M4) pan head screw
- Lever disconnect


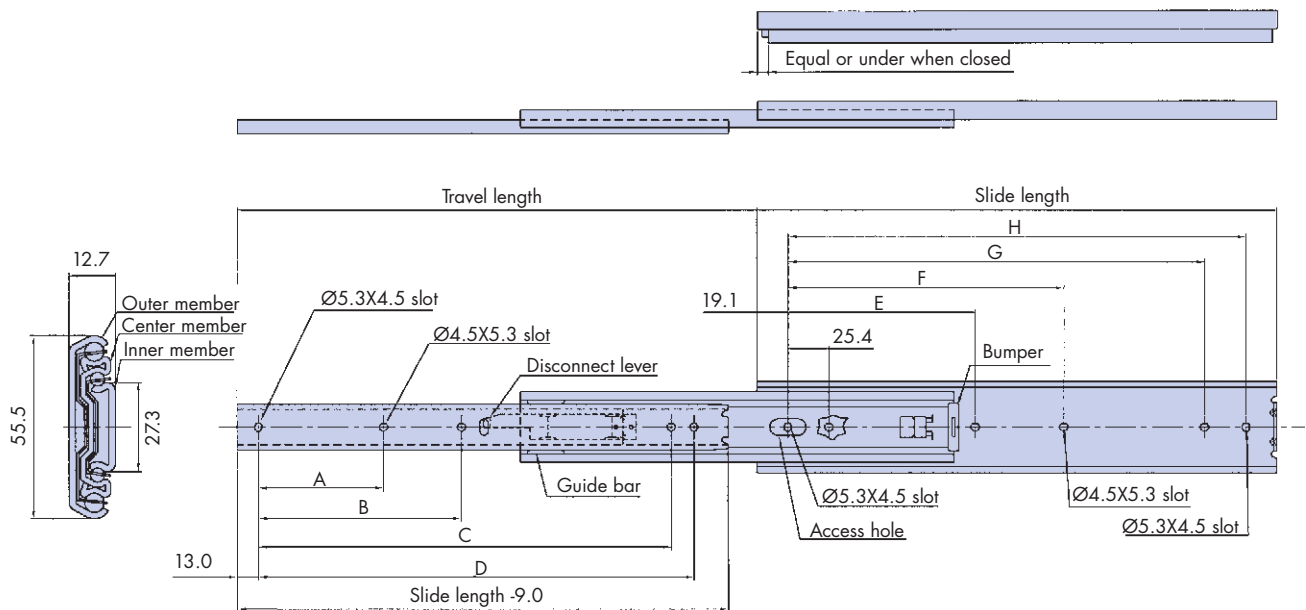


| Part number | Slide length | Travel length | Hole length mm |       |       |       |       |       |       |       | Load Rating kg/pair | Slide weight kg/pair |
|-------------|--------------|---------------|----------------|-------|-------|-------|-------|-------|-------|-------|---------------------|----------------------|
|             |              |               | A              | B     | C     | D     | E     | F     | G     | H     |                     |                      |
| TS-552-12   | 304.8        | 330.0         | 76.2           | –     | 228.6 | 254.0 | 88.9  | 177.8 | 241.3 | 266.7 | 90                  | 1.32                 |
| TS-552-14   | 355.6        | 381.0         | 101.6          | –     | 279.4 | 304.8 | 101.6 | 215.9 | 292.1 | 317.5 | 88                  | 1.53                 |
| TS-552-16   | 406.4        | 432.0         | 114.3          | –     | 330.2 | 355.6 | 127.0 | 241.3 | 342.9 | 368.3 | 86                  | 1.72                 |
| TS-552-18   | 457.2        | 483.0         | 139.7          | –     | 381.0 | 406.4 | 139.7 | 279.4 | 393.7 | 419.1 | 84                  | 1.94                 |
| TS-552-20   | 508.0        | 533.0         | 152.4          | –     | 431.8 | 457.2 | 152.4 | 317.5 | 444.5 | 469.9 | 82                  | 2.12                 |
| TS-552-22   | 558.8        | 584.0         | 177.8          | –     | 482.6 | 508.0 | 177.8 | 342.9 | 495.3 | 520.7 | 79                  | 2.32                 |
| TS-552-24   | 609.6        | 635.0         | 190.5          | –     | 533.4 | 558.8 | 190.5 | 381.0 | 546.1 | 571.5 | 77                  | 2.42                 |
| TS-552-26   | 660.4        | 686.0         | 203.2          | 419.1 | 584.2 | 609.6 | 203.2 | 419.1 | 596.9 | 622.3 | 75                  | 2.77                 |
| TS-552-28   | 711.2        | 737.0         | 228.6          | 457.2 | 635.0 | 660.4 | 228.6 | 444.5 | 647.7 | 673.1 | 72                  | 2.94                 |

## TS-555 LEVER DISCONNECT LOCK OUT OVER TRAVEL HEAVY DUTY SLIDE

## Model TS-555

- Over travel
- Load rating (per pair)  
72-90kg (see table)
- #8(M4) pan head screw
- Lever disconnect / Lock-out

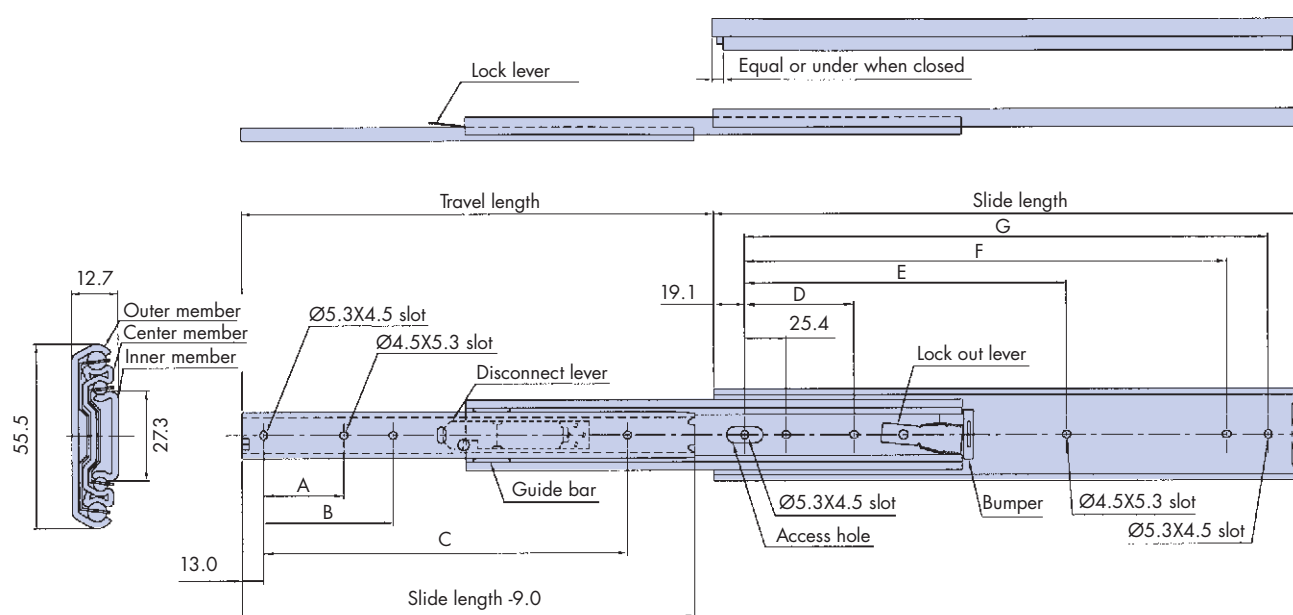
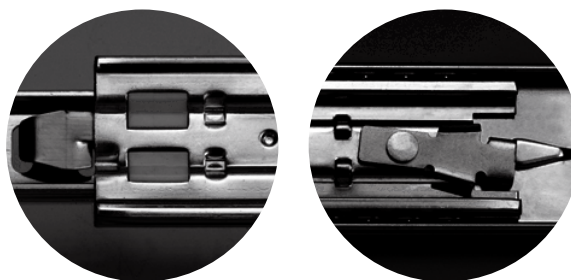


| Part number | Slide length | Travel length | Hole length mm |       |       |       |       |       |       | Load Rating kg/pair | Slide weight kg/pair |
|-------------|--------------|---------------|----------------|-------|-------|-------|-------|-------|-------|---------------------|----------------------|
|             |              |               | A              | B     | C     | D     | E     | F     | G     |                     |                      |
| TS-555-12   | 304.8        | 330.0         | 76.2           | –     | 228.6 | 88.9  | 177.8 | 241.3 | 266.7 | 90                  | 1.34                 |
| TS-555-14   | 355.6        | 381.0         | 101.6          | –     | 279.4 | 101.6 | 215.9 | 292.1 | 317.5 | 88                  | 1.55                 |
| TS-555-16   | 406.4        | 432.0         | 114.3          | –     | 330.2 | 127.0 | 241.3 | 342.9 | 368.3 | 86                  | 1.74                 |
| TS-555-18   | 457.2        | 483.0         | 139.7          | –     | 381.0 | 139.  | 279.4 | 393.7 | 419.1 | 84                  | 1.96                 |
| TS-555-20   | 508.0        | 533.0         | 152.4          | –     | 431.8 | 152.4 | 317.5 | 444.5 | 469.9 | 82                  | 2.14                 |
| TS-555-22   | 558.8        | 584.0         | 177.8          | –     | 482.6 | 177.8 | 342.9 | 495.3 | 520.7 | 79                  | 2.34                 |
| TS-555-24   | 609.6        | 635.0         | 190.5          | –     | 533.4 | 190.5 | 381.0 | 546.1 | 571.5 | 77                  | 2.44                 |
| TS-555-26   | 660.4        | 686.0         | 203.2          | 419.1 | 584.2 | 203.2 | 419.1 | 596.9 | 622.3 | 75                  | 2.80                 |
| TS-555-28   | 711.2        | 737.0         | 288.6          | 457.2 | 635.0 | 228.6 | 444.5 | 647.7 | 673.1 | 72                  | 2.96                 |

## TS-560 OVER TRAVEL HEAVY DUTY SLIDE

### Model TS-560

- Over travel
- Load rating (per pair)  
90–120kg (see table)
- #8(M4) pan head screw
- Non-disconnect

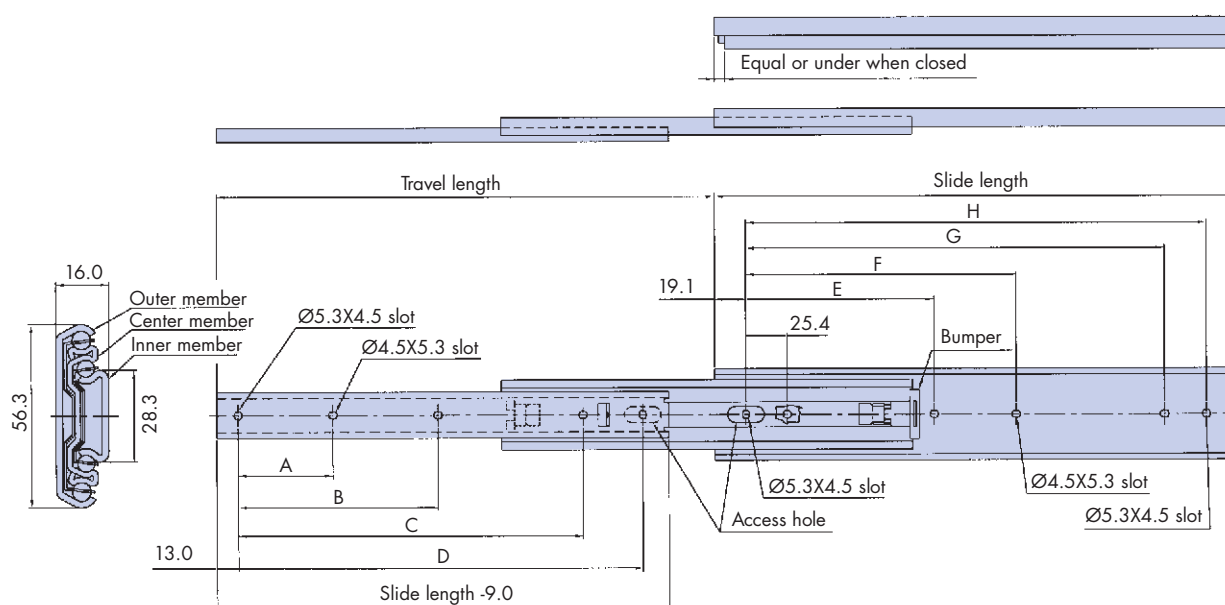


| Part number | Slide length | Travel length | Hole length mm |       |       |       |       |       |       |       | Load Rating kg/pair | Slide weight kg/pair |
|-------------|--------------|---------------|----------------|-------|-------|-------|-------|-------|-------|-------|---------------------|----------------------|
|             |              |               | A              | B     | C     | D     | E     | F     | G     | H     |                     |                      |
| TS-560-12   | 304.8        | 330.0         | 76.2           | 177.8 | 228.6 | 254.0 | 88.9  | 177.8 | 241.3 | 266.7 | 120                 | 1.65                 |
| TS-560-14   | 355.6        | 381.0         | 101.6          | 215.9 | 279.4 | 304.8 | 101.6 | 215.9 | 292.1 | 317.5 | 116                 | 1.90                 |
| TS-560-16   | 406.4        | 432.0         | 114.3          | 241.3 | 330.2 | 355.6 | 127.0 | 241.3 | 342.9 | 368.3 | 112                 | 2.00                 |
| TS-560-18   | 457.2        | 483.0         | 139.7          | 279.4 | 381.0 | 406.4 | 139.7 | 279.4 | 393.7 | 419.1 | 109                 | 2.26                 |
| TS-560-20   | 508.0        | 533.0         | 152.4          | 317.5 | 431.8 | 457.2 | 152.4 | 317.5 | 444.5 | 469.9 | 105                 | 2.45                 |
| TS-560-22   | 558.8        | 584.0         | 177.8          | 355.6 | 482.6 | 508.0 | 177.8 | 342.9 | 495.3 | 520.7 | 101                 | 2.65                 |
| TS-560-24   | 609.6        | 635.0         | 190.5          | 381.0 | 533.4 | 558.8 | 190.5 | 381.0 | 546.1 | 571.5 | 98                  | 2.75                 |
| TS-560-26   | 660.4        | 686.0         | 203.2          | 419.1 | 584.2 | 609.6 | 203.2 | 419.1 | 596.9 | 622.3 | 94                  | 3.14                 |
| TS-560-28   | 711.2        | 737.0         | 228.6          | 457.2 | 635.0 | 660.4 | 228.6 | 444.5 | 647.7 | 673.1 | 90                  | 3.50                 |

## TS-562 LEVER DISCONNECT OVER TRAVEL HEAVY DUTY SLIDE

### Model TS-562

- Over travel
- Load rating (per pair)  
87–115kg (see table)
- #8(M4) pan head screw
- Lever disconnect

STOCK SERIES


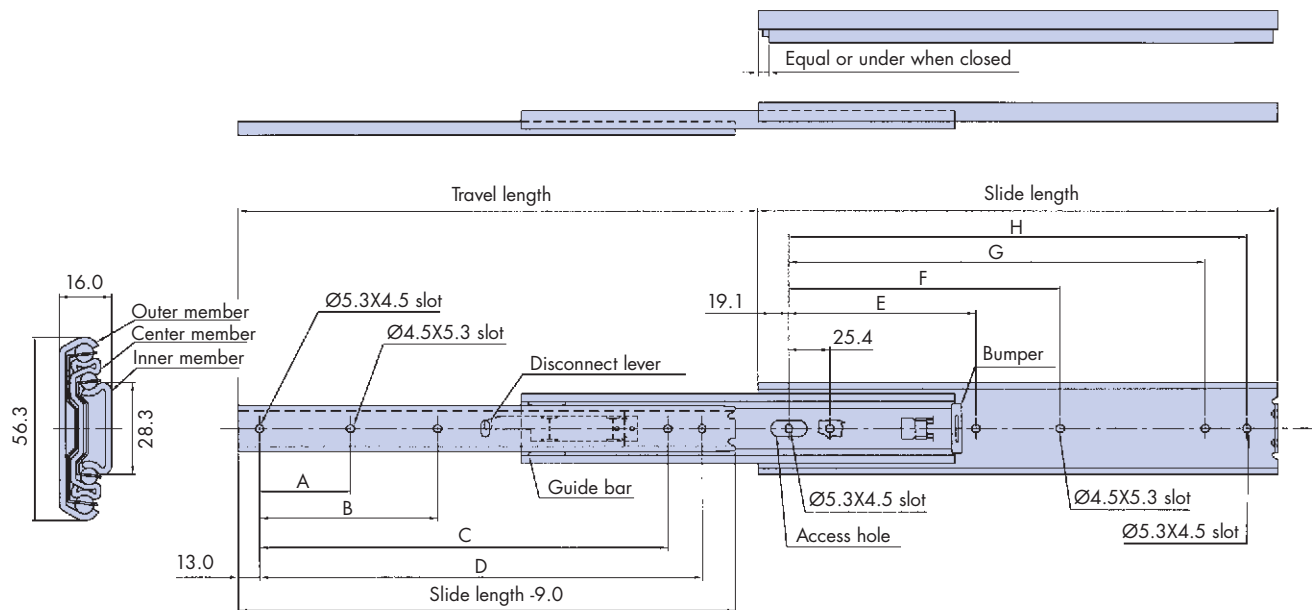


| Part number | Slide length | Travel length | Hole length mm |       |       |       |       |       |       |       | Load Rating kg/pair | Slide weight kg/pair |
|-------------|--------------|---------------|----------------|-------|-------|-------|-------|-------|-------|-------|---------------------|----------------------|
|             |              |               | A              | B     | C     | D     | E     | F     | G     | H     |                     |                      |
| TS-562-12   | 304.8        | 330.0         | 76.2           | –     | 228.6 | 254.0 | 88.9  | 177.8 | 241.3 | 266.7 | 115                 | 1.70                 |
| TS-562-14   | 355.6        | 381.0         | 101.6          | –     | 279.4 | 304.8 | 101.6 | 215.9 | 292.1 | 317.5 | 111                 | 1.95                 |
| TS-562-16   | 406.4        | 432.0         | 114.3          | –     | 330.2 | 355.6 | 127.0 | 241.3 | 342.9 | 368.3 | 107                 | 2.05                 |
| TS-562-18   | 457.2        | 483.0         | 139.7          | –     | 381.0 | 406.4 | 139.7 | 279.4 | 393.7 | 419.1 | 104                 | 2.31                 |
| TS-562-20   | 508.0        | 533.0         | 152.4          | –     | 431.8 | 457.2 | 152.4 | 317.5 | 444.5 | 469.9 | 101                 | 2.50                 |
| TS-562-22   | 558.8        | 584.0         | 177.8          | –     | 482.6 | 508.0 | 177.8 | 342.9 | 495.3 | 520.7 | 97                  | 2.70                 |
| TS-562-24   | 609.6        | 635.0         | 190.5          | –     | 533.4 | 558.8 | 190.5 | 381.0 | 546.1 | 571.5 | 94                  | 2.80                 |
| TS-562-26   | 660.4        | 686.0         | 203.2          | 419.1 | 584.2 | 609.6 | 203.2 | 419.1 | 596.9 | 622.3 | 90                  | 3.20                 |
| TS-562-28   | 711.2        | 737.0         | 228.6          | 457.2 | 635.0 | 660.4 | 228.6 | 444.5 | 647.7 | 673.1 | 87                  | 3.60                 |

## TS-565 LEVER DISCONNECT LOCK OUT OVER TRAVEL HEAVY DUTY SLIDE

## Model TS-565

- Over travel
- Load rating (per pair)  
87-115kg (see table)
- #8(M4) pan head screw
- Lever disconnect / Lock - out

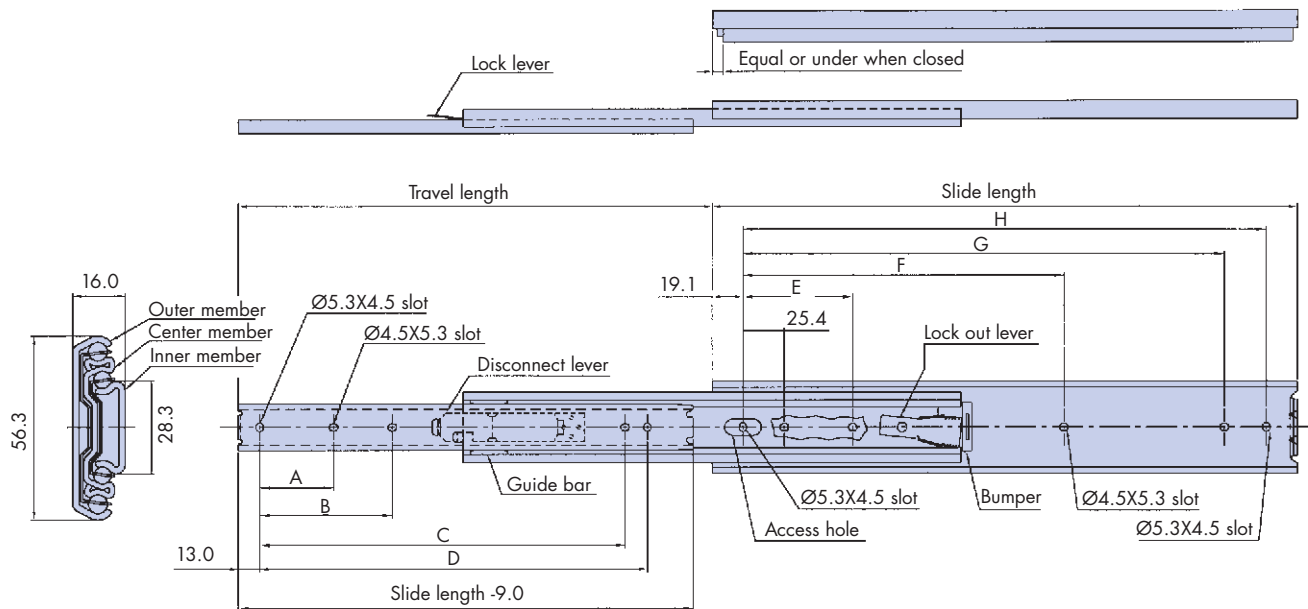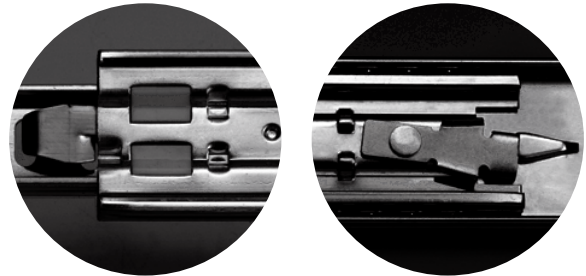**STOCK SERIES**

| Part number | Slide length | Travel length | Hole length mm |       |       |       |       |       |       |       | Load Rating kg/pair | Slide weight kg/pair |
|-------------|--------------|---------------|----------------|-------|-------|-------|-------|-------|-------|-------|---------------------|----------------------|
|             |              |               | A              | B     | C     | D     | E     | F     | G     | H     |                     |                      |
| TS-565-12   | 304.8        | 330.0         | 76.2           | –     | 228.6 | –     | 88.9  | 177.8 | 241.3 | 266.7 | 115                 | 1.75                 |
| TS-565-14   | 355.6        | 381.0         | 101.6          | –     | 279.4 | 304.8 | 101.6 | 215.9 | 292.1 | 317.5 | 111                 | 2.00                 |
| TS-565-16   | 406.4        | 432.0         | 114.3          | –     | 330.2 | 355.6 | 127.0 | 241.3 | 342.9 | 368.3 | 107                 | 2.10                 |
| TS-565-18   | 457.2        | 483.0         | 139.7          | –     | 381.0 | 406.4 | 139.7 | 279.4 | 393.7 | 419.1 | 104                 | 2.36                 |
| TS-565-20   | 508.0        | 533.0         | 152.4          | –     | 431.8 | 457.2 | 152.4 | 317.5 | 444.5 | 469.9 | 101                 | 2.55                 |
| TS-565-22   | 558.8        | 584.0         | 177.8          | –     | 482.6 | 508.0 | 177.8 | 342.9 | 495.3 | 520.7 | 97                  | 2.75                 |
| TS-565-24   | 609.6        | 635.0         | 190.5          | –     | 533.4 | 558.8 | 190.5 | 381.0 | 546.1 | 571.5 | 94                  | 2.85                 |
| TS-565-26   | 660.4        | 686.0         | 203.2          | 419.1 | 584.2 | 609.6 | 203.2 | 419.1 | 596.9 | 622.3 | 90                  | 3.25                 |
| TS-565-28   | 711.2        | 737.0         | 228.6          | 457.2 | 635.0 | 660.4 | 228.6 | 444.5 | 647.7 | 673.1 | 87                  | 3.65                 |

## Notes

[illegible]

## Notes

[illegible]



## Bishop-Wisecarver Product Range

HepcoMotion® – Exclusive European partners and distributors for Bishop-Wisecarver since 1984.



For further information on HepcoMotion® products –  
please request our leaflet 'FPL'

# HepcoMotion®

[www.HepcoMotion.com](http://www.HepcoMotion.com)

Lower Moor Business Park, Tiverton Way, Tiverton, Devon, England EX16 6TG

Tel: +44 (0)1884 257000 Fax: +44 (0)1884 243500

E-mail: [sales@hepcotion.com](mailto:sales@hepcotion.com)

CATALOGUE No. HTS 03 UK © 2008 Hepco Slide Systems Ltd.

Reproduction in whole or part without prior authorisation from Hepco is prohibited. Although every effort has been made to ensure the accuracy of the information in this catalogue, Hepco cannot accept liability for any omissions or errors. Hepco reserves the right to make alterations to the product resulting from technical developments.

Many Hepco products are protected by: Patents, Copyright, Design Right or Registered Design. Infringement is strictly prohibited and may be challenged in law. The Customer's attention is drawn to the following clause in Hepco's conditions of sale:

'It shall be the Customer's sole responsibility to ensure that goods supplied by Hepco will be suitable or fit for any particular application or purpose of the Customer, whether or not such application or purpose is known to Hepco. The Customer will be solely responsible for any errors in, or omissions from, any specifications or information the Customer provides. Hepco will not be obliged to verify whether any such specifications or information are correct or sufficient for any application or purpose.'

Hepco's full conditions of sale are available on request and will apply to all quotations and contracts for the supply of items detailed in this catalogue.

HepcoMotion is the trading name of Hepco Slide Systems Ltd.



INVESTOR IN PEOPLE

