

# LINEAR MOTION SOLUTIONS

Simplicity® Self-Lubricated Bearings, Guides, Systems & Slides



800.962.8979

**PBC**  
**LINEAR**  
A PACIFIC BEARING CO.

[www.pbclinear.com](http://www.pbclinear.com)



# Linear Shafting

Engineered for Maximum Linear Bearing Performance

Introducing

**simplicity**  
**60 PLUS**  
S H A F T I N G



Only certified  
*Simplicity 60 Plus Shafting*  
provides maximum  
bearing performance.



## Linear Ball Bearings

The right amount of microscopic surface texture holds lubrication for consistent smooth ball rotation minimizing the effects of metal-to-metal contact.

- **Excellent rigidity** while providing smooth, quiet operation
- **Extremely low friction** - rolling elements provide consistent anti-friction movement
- **Outer shell** - Available with steel jacket or self-aligning super bearing shell.



## Simplicity® Plain Bearings

The Frelon® break-in and transfer process operates at maximum efficiency with Simplicity 60 Plus Shafting resulting in true self-lubrication and the longest life possible.

- **Self-lubricating** - maintenance-free, additional lubrication optional
- **Wide temperatures range** (-400°F/+400°F), (-240°C/+204°C)
- **Vibration damping** - eliminates fretting corrosion

# New

## Round Shaft Technology Catalog

PBC Linear's bearings and shafting product information has been updated! Compiled into a new catalog, you will find technical specifications, application examples, and ordering details for this product family.



[Click here to open the new Round Shaft Technology catalog.](#)

<b>PLAIN</b>
<b>BALL</b>
<b>THIN WALL</b>
<b>SLEEVE &amp; SLEEVE WITH FLANGE</b>
<b>PILLOW BLOCK</b>
<b>FLANGE MOUNT</b>
<b>FLANGE BEARING</b>
<b>DIE SET FLANGE MOUNT</b>
<b>ROUND SHAFTING</b>
<b>LINEAR SLIDE ASSEMBLIES</b>
<b>SQUARE BEARINGS &amp; SHAFTING</b>



# Table of Contents

## MINI-RAIL® MINIATURE LINEAR GUIDES



	<b>Product Overview</b> .....	184-185
	<b>Technical Information</b> .....	186
	<b>Low Profile Mini-Rail® - LPM</b> .....	188




<b>Mini-Rail® Miniature Lead Screw - Driven Slide</b>	
<b>LS</b> .....	190
<b>MS</b> .....	191
<b>Technical Information</b> .....	192



## UNI-GUIDE - SLIDES, TABLES & STAGES

	<b>Product Overview</b> .....	193
	<b>Technical &amp; Ordering Information</b> .....	194
	<b>Uni-Guide</b> .....	195
	<b>D075 (Small)</b> .....	196
	<b>D100 (Medium)</b> .....	197
	<b>D125 (Large)</b> .....	198



## REDI-RAIL® LINEAR GUIDES

	<b>Product Overview</b> .....	200
	<b>Technical Information</b> .....	200-201
	Adjusting Slider Preload .....	200
	Slider Orientation .....	200
	Lubrication - Rails & Bearings .....	200
	Mounting Slider .....	200
	Life Calculations .....	201
	Reduction Factor .....	201
	Load Comparison Graphs .....	201



<b>Redi-Rail® Linear Guides - ISO Metric</b>	
<b>RRS30 Slide</b> .....	206
<b>RR30 Rail</b> .....	207
<b>RRS45 Slide</b> .....	208
<b>RR45 Rail</b> .....	209
<b>RRS65 Slide</b> .....	210
<b>RR65 Slide</b> .....	211



	<b>Redi-Rail® Linear Guides - Inch Series</b>	
	<b>RRS14 Slide</b> .....	202
	<b>RR14 Rail</b> .....	203
	<b>RRS18 Slide</b> .....	204
	<b>RR18 Rail</b> .....	205



Click here to open the new Round Shaft Technology catalog. Get product details on Simplicity® self-lubricating plain bearings, linear ball bearings, Simplicity® 60 Plus™ Shafting, square bearings, and linear slides.

## V-GUIDE SYSTEM



<b>Product Overview</b> .....	231
<b>V-Guide - 20mm (3/4")</b> .....	232
Radial Loads to 283 lbs. (1,260 N) per Wheel	
<b>V-Guide - 30mm (1-1/4")</b> .....	233
Radial Loads to 614 lbs. (2,730 N) per Wheel	

<b>V-Guide - 45mm (1-3/4")</b> .....	234
Radial Loads to 1,386 lbs.(6,166 N) per Wheel	
<b>V-Guide - 60mm (2-1/4")</b> .....	235
Radial Loads to 2,246 lbs. (9,991 N) per Wheel	
<b>Technical Information</b> .....	236-237

## COMMERCIAL RAIL



<b>Product Overview</b> .....	238
<b>CR20 Slide &amp; Rail</b> .....	239
Dynamic Radial Cr = 280 N	

<b>CR30 Slide &amp; Rail</b> .....	240
Dynamic Radial Cr = 800 N	
<b>CR45 Slide &amp; Rail</b> .....	241
Dynamic Radial Cr= 1,740 N	

## HARDENED CROWN ROLLERS



<b>Product Overview</b> .....	242
-------------------------------	-----

## HEVI-RAIL® LINEAR BEARING SYSTEMS



<b>Product Overview</b> .....	243
<b>Technical Information</b> .....	244
<b>Selection Guide</b> .....	244
<b>Mounting Configurations</b> .....	245
<b>Hevi-Rail Linear Bearing System</b>	
0.6 US Ton-Force.....	246
0.8 US Ton-Force.....	247
0.9 US Ton-Force.....	248

<b>1.0 US Ton-Force</b> .....	249-250
<b>1.7 US Ton-Force</b> .....	251
<b>1.8 US Ton-Force</b> .....	252-253
<b>2.6 US Ton-Force</b> .....	254
<b>4.6 US Ton-Force</b> .....	255



Click here to open the new Round Shaft Technology catalog. Get product details on Simplicity® self-lubricating plain bearings, linear ball bearings, Simplicity® 60 Plus™ Shafting, square bearings, and linear slides.



# Mini-Rail® Miniature Linear Guides

## Product Overview

Mini-Rail®

### PRODUCT OVERVIEW

An economical alternative to conventional miniature linear guides, Mini-Rail requires no maintenance, is fully interchangeable with industry standard sizes and is maintained in stock for quick delivery.

Mini-Rail miniature linear guides are available in five sizes: 7, 9, 12, 15 and 20mm - in lengths up to 3600mm, meaning no cumbersome butt joints. These guides are precision manufactured out of lightweight aluminum alloys to ensure long life and corrosion resistance.

- No rolling elements
- Self-lubricating Frelon GOLD® Liner
- Withstands vibration and shock
- Corrosion-resistant - ideal in harsh environments
- Ceramic coated, aluminum rail
- Compact design- small footprint

### CARRIAGE CONFIGURATIONS



**Precision Series:** Ceramic coated rails and carriages are corrosion resistant. Frelon GOLD® self-lubricating liner delivers the best overall performance, the highest loads, the best wear life, and speeds. Most precise running clearance for high precision applications.

**Compensated Precision Series:** Same as Precision Series except with additional clearance provided to tolerate misalignment.

### APPLICATIONS

- Medical Precision
- Food Processing
- Automation
- Electronics
- Mobile Home Components
- Packaging
- Product Movement
- Printing
- Semi-conductor


### ORDERING INFORMATION

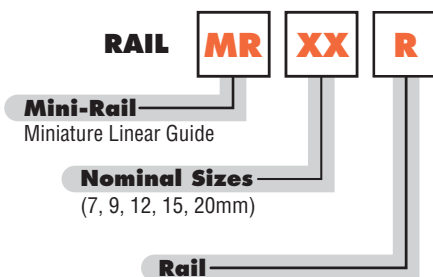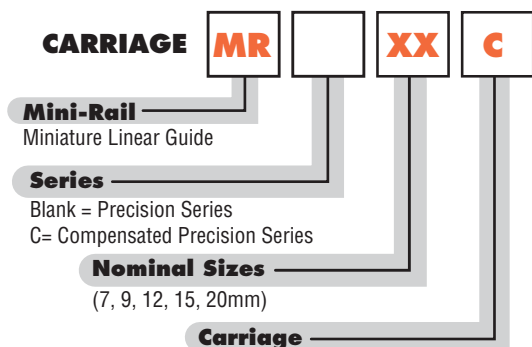


EXAMPLE: MRC20C  
MR20R



**Precision Series**  
.025 - .051mm  
Running Clearance  
(CERAMIC COATED)




**Compensated Precision Series**  
.064 - .089mm  
Running Clearance  
(CERAMIC COATED)



Frelon GOLD® and Frelon® J are Teflon® based materials that are truly self-lubricating. Frelon® materials are bonded to the carriage creating a one-piece unit.



### MINI-RAIL - MR

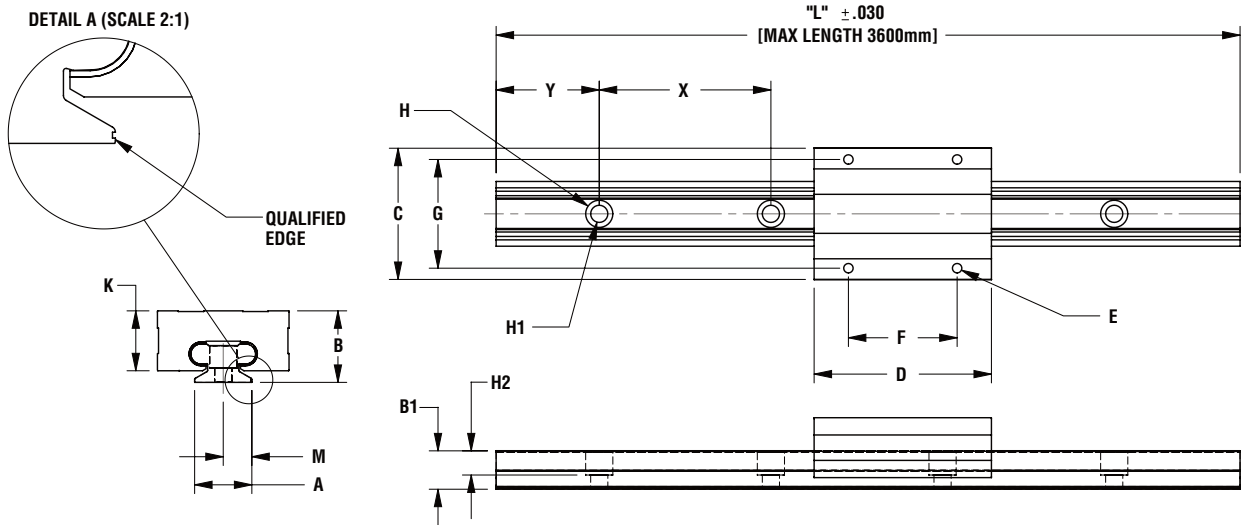

(Maximum Length 3600mm)

Materials: 6061-T6 aluminum rail and carriage, Frelon GOLD® or Frelon® J liner

**Max V:** 300 sfm for Frelon GOLD, 140 sfm for Frelon J

**Max P:** 3000 psi for Frelon GOLD, 1500 psi for Frelon J

PART NUMBER	RUNNING CLEARANCE	A	B	B1	C	D	E		F	G	H	H <sub>1</sub>	H <sub>2</sub>	K	M	Y	X	RAIL WT. (gram/mm)	CARRIAGE WT. (gram)	
		BASE WIDTH (mm)	OVERALL HEIGHT	RAIL HEIGHT	CARRIAGE WIDTH	CARRIAGE LENGTH	CARRIAGE MTG. HOLE SIZE	CARRIAGE MTG. HOLE DEPTH	CARRIAGE MTG. HOLE CTR. TO CTR.	RAIL HOLE SIZE			CARRIAGE HEIGHT	RAIL MTG. HOLE TO QUALIFIED EDGE	RAIL HOLE TO END	RAIL HOLE CTR. TO CTR.				
MR7-XXX	.025 - .051	7	8	6.1	17	24	M2 x 0.4	THRU	8	12	4.2	2.4	2.3	6.2	3.5	5	15	0.10	5.7	
MRC7-XXX	.064 - .089																			
MR9-XXX	.025 - .051	9	10	7.1	20	30	M3 x 0.5		13	15	4.5	2.6	3	8.0	4.5	7.5	20	0.16	8.5	
MRC9-XXX	.064 - .089																			
MR12-XXX	.025 - .051	12	13	8.0	27	34	M3 x 0.5		15	20	6	3.5	10.7	6	10	25	0.22	20.0		
MRC12-XXX	.064 - .089																			
MR15-XXX	.025 - .051	15	16	9.2	32	42	M3 x 0.5		20	25	6	3.5	4.5	14.1	7.5	15	40	0.38	34.0	
MRC15-XXX	.064 - .089																			
MR20-XXX	.025 - .051	20	25	13.4	46	62	M4 x 0.7		12.5	38	38	9.5	6	8.5	21.2	10	20	60	0.48	127.9
MRC20-XXX	.064 - .089																			

**NOTES:** Cut-to-length rails are available up to 3600mm.

Standard and cut-to-length rail ends are NOT coated. Fully coated rails are available upon request.

All carriage mounting holes are through tapped except MR20 12.5mm of thread.

The "Y" dimension will remain constant at one end unless requested otherwise.

Add the overall length of the rail to the part number (EX: "MR12-0220" for a Precision Series assembly with a 220mm rail)

### ORDERING INFORMATION



EXAMPLE: MR12-0220-2

**Mini-Rail**  
Miniature Linear Guide

**# of Carriages**

**Series**  
Blank = Precision Series  
C = Compensated Precision Series

**Length of Rail in mm**  
EX: 50mm = 0050

FrelonGOLD® bearing material on RC70 ceramic-coated rail

**Nominal Sizes**  
(7, 9, 12, 15, 20mm)



# Mini-Rail® - MR

## Technical Information

Technical Information

### STATIC LOAD DATA

The numbers below are for rails in a static condition. Refer to the calculations below to establish dynamic parameters.





SIZE	F (N)	MSL (N)*
7	445	734
9	667	1557
12	1334	1957
15	2224	3114
20	3559	6005

\*Max static load in Newtons.

SIZE	F (N)
7	89
9	125
12	222
15	356
20	578

SIZE	My (N-m)	Mx (N-m)	Mz (N-m)
7	2.3	1.8	1.8
9	5.0	3.2	3.2
12	9.0	5.6	5.6
15	15.1	9.0	9.0
20	24.9	14.7	14.7

SIZE	F (N)	My (N-m)	Mx (N-m)	Mz (N-m)
7	133	2.3	1.8	1.8
9	222	5.0	3.2	3.2
12	400	9.0	5.6	5.6
15	667	15.1	9.0	9.0
20	1112	24.9	14.7	14.7



### PERFORMANCE RATINGS FOR LINEAR MOTION

Plane bearings are rated by their limiting PV, which is a combination of load over a given surface area and the velocity.

BEARING MATERIAL	MAX. "PV"	MAX. "P"	MAX. "V" (NO LUBRICATION)
Frelon GOLD®	20,000 (psi x ft./min.) or 0.7 N/mm <sup>2</sup> x m/s	3000 psi or 20.68 N/mm <sup>2</sup>	300 sfm or 1.524 m/s
Frelon® J	10,000 (psi x ft./min.) or 0.35 N/mm <sup>2</sup> x m/s	1500 psi or 10.34 N/mm <sup>2</sup>	140 sfm or 0.711 m/s

PV = The performance measurement of plane bearings.


PV = P x V, where P = pressure (load) in psi (kgf/cm<sup>2</sup>)

V = velocity (speed) in sfm (m/min.)

**NOTE:** All three parameters must be met by an application for the bearing to perform properly.

### CANTILEVERED LOADS

Binding of the carriage will occur if the 2:1 ratio for cantilevered loads and drive forces is exceeded. This principle is not load or force dependent. It is a product of the coefficient of frictions associated with plane bearings. Contact factory or website for additional information.

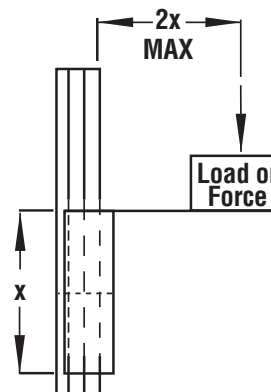

### LOAD/MOMENT CONVERSION


$$N = 4.45 \times (\text{lbs.})$$

$$N\text{-m} = 0.113 \times (\text{in.-lbs.})$$



# Design & Layout Options

Name: _____	Date: _____
Dept.: _____	Phone: _____ Fax: _____
Company: _____	Machine Type/Name: _____
Email: _____	
Address: _____	
_____	

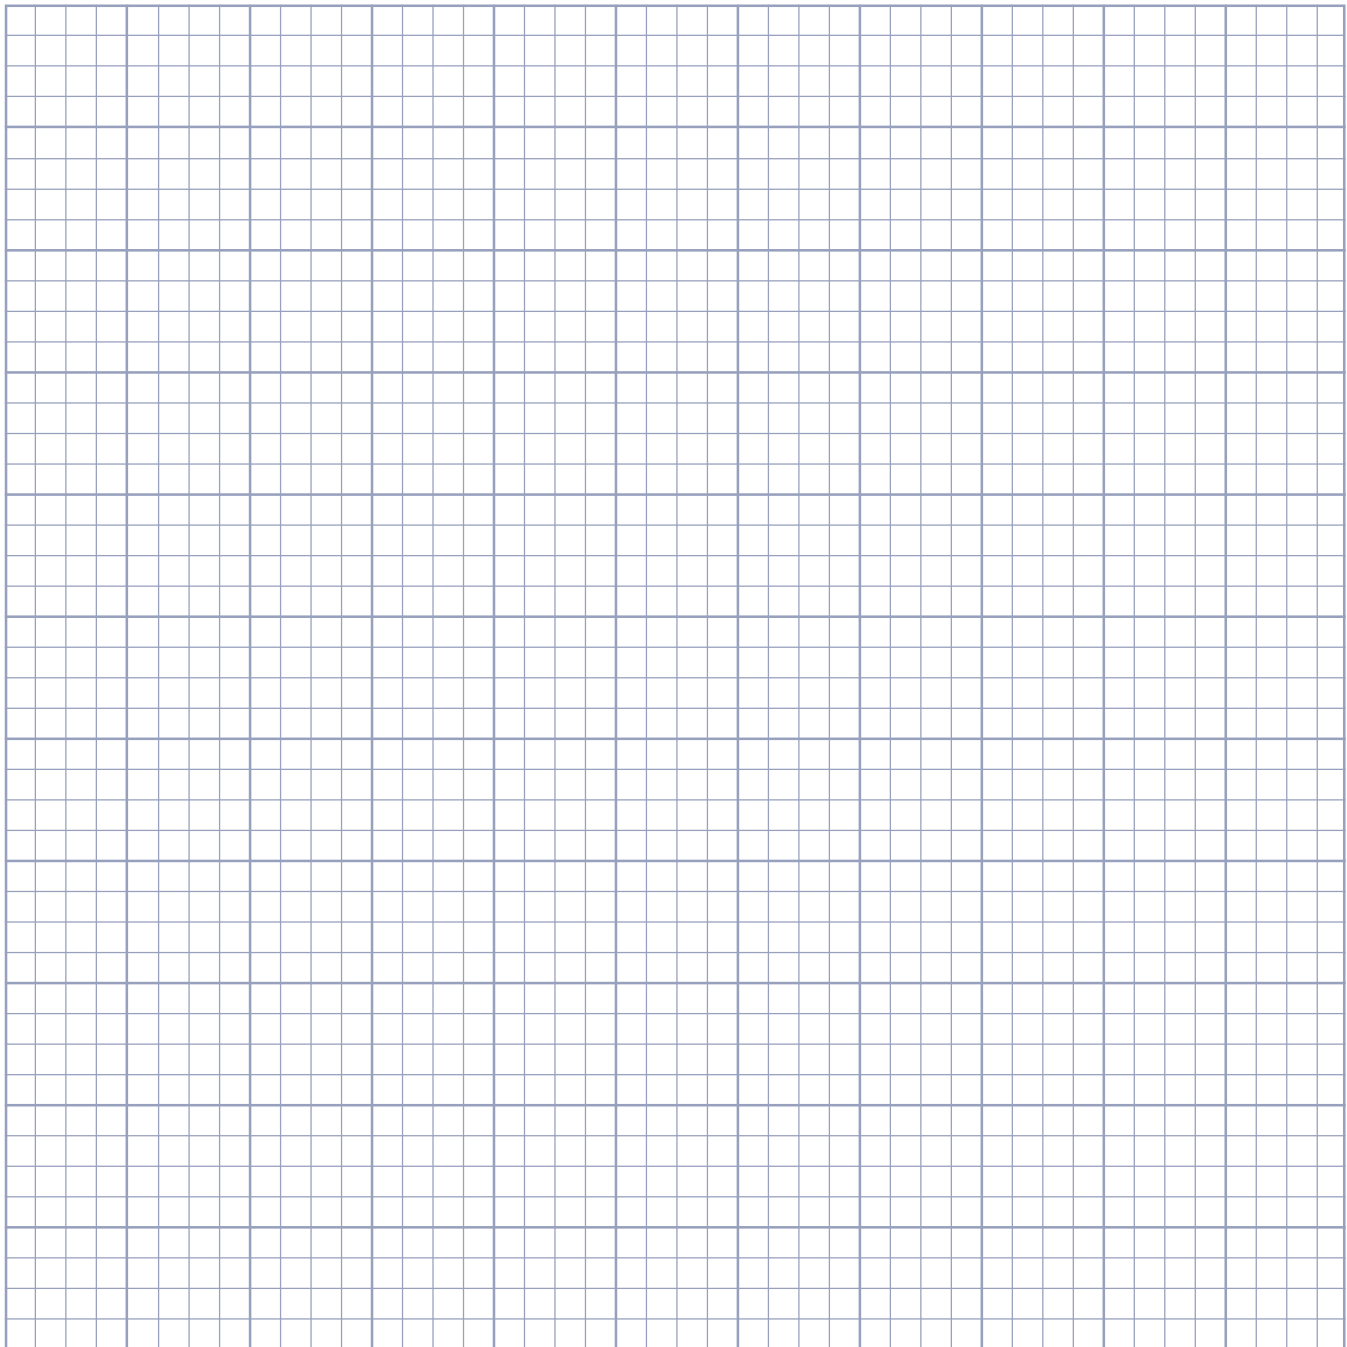


# Low Profile Mini-Rail® - LPM

## Miniature Guide/Slide Motion Systems

Low Profile Mini-Rail®



### LOW PROFILE MINI-RAIL® - LPM

- Low profile for small spaces
- Low cost polymer slider
- Molded SS threaded Inserts
- Double rail track
- Ideal in harsh environments
- Available in four sizes

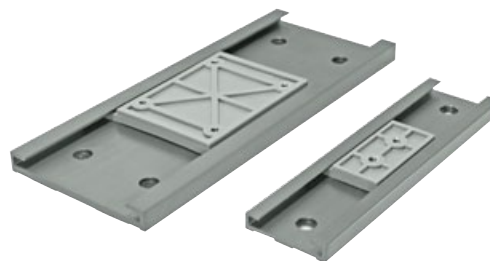

**Materials:** SimGlide™-J Polymer slider (UL 94 HB flammability rating)  
Molded-in stainless steel thread inserts  
Anodized aluminum rails


**Operating Temperatures:** -35C to 65C (-30F to 150F)  
**Chemical Resistance:** Resistant to lubricants, fuels, dyes, weak acids  
**Maximum Velocity:** 10 m/s  
**Load Reduction Factor:** 0.7-1.0 for low speed application; 0.4-0.7 for medium speed application; 0.1-0.4 for high speed application

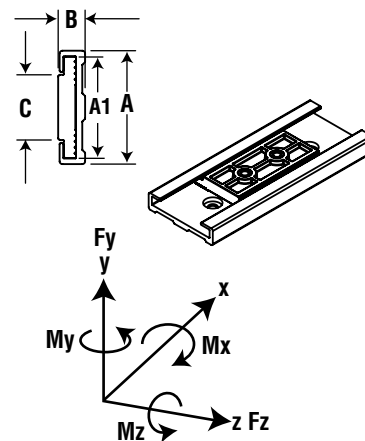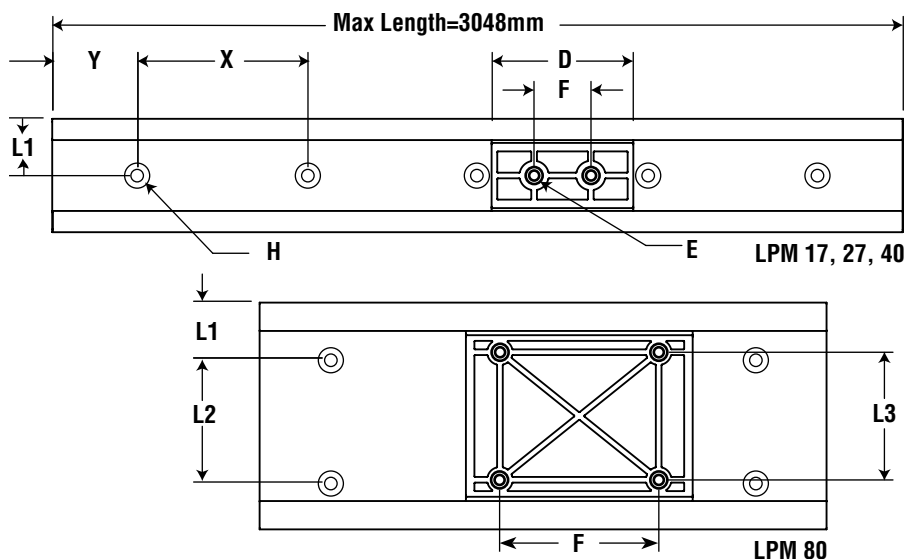

PART NUMBER	A1 (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	H (C'BORE) (mm)	L1 (mm)	L2 (mm)	L3 (mm)	Y (mm)	X (mm)	CAR-RIAGE WT. (g)	RAIL UNIT WT. (g/mm)	LOAD CAPACITY									
																Fy (N, lbs.)		Fz (N, lbs.)		Mx (N-m, lbs.-in.)		My (N-m, lbs.-in.)		Mz (N-m, lbs.-in.)	
LPM17	14.6	17	6	9.6	25	M3 x 0.5	14	M3 SBHCS	8.5	N/A	N/A	20	60	1.1	0.15	35	8	10	2.5	0.2	1.5	0.3	2.5	0.2	1.5
LPM27	24	27	9.5	14	40	M4 x 0.7	20	M4 SBHCS	13.5	N/A	N/A	20	60	4.8	0.33	130	30	85	20	1	10	2.5	20	1	10
LPM40	36	40	9.5	23	50	M4 x 0.7	20	M4 SBHCS	20	N/A	N/A	20	60	9.8	0.38	270	60	150	35	2.5	25	5	50	2.5	25
LPM80	75.2	80	12.0	57	80	M4 x 0.7	56	M4 SBHCS	20	40	45	25	150	32.3	1.07	515	120	250	55	7	60	14	125	7	60

NOTE: Apply a load reduction factor 0.25 on Fy rating if the system is used inverted.


### ORDERING INFORMATION

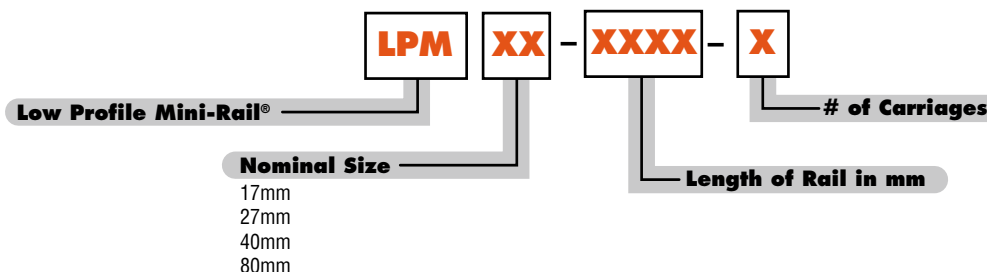

EXAMPLE: LPMXX-XXXX-X

# Design & Layout Options

Name: _____	Date: _____
Dept.: _____	Phone: _____ Fax: _____
Company: _____	Machine Type/Name: _____
Email: _____	
Address: _____	
_____	

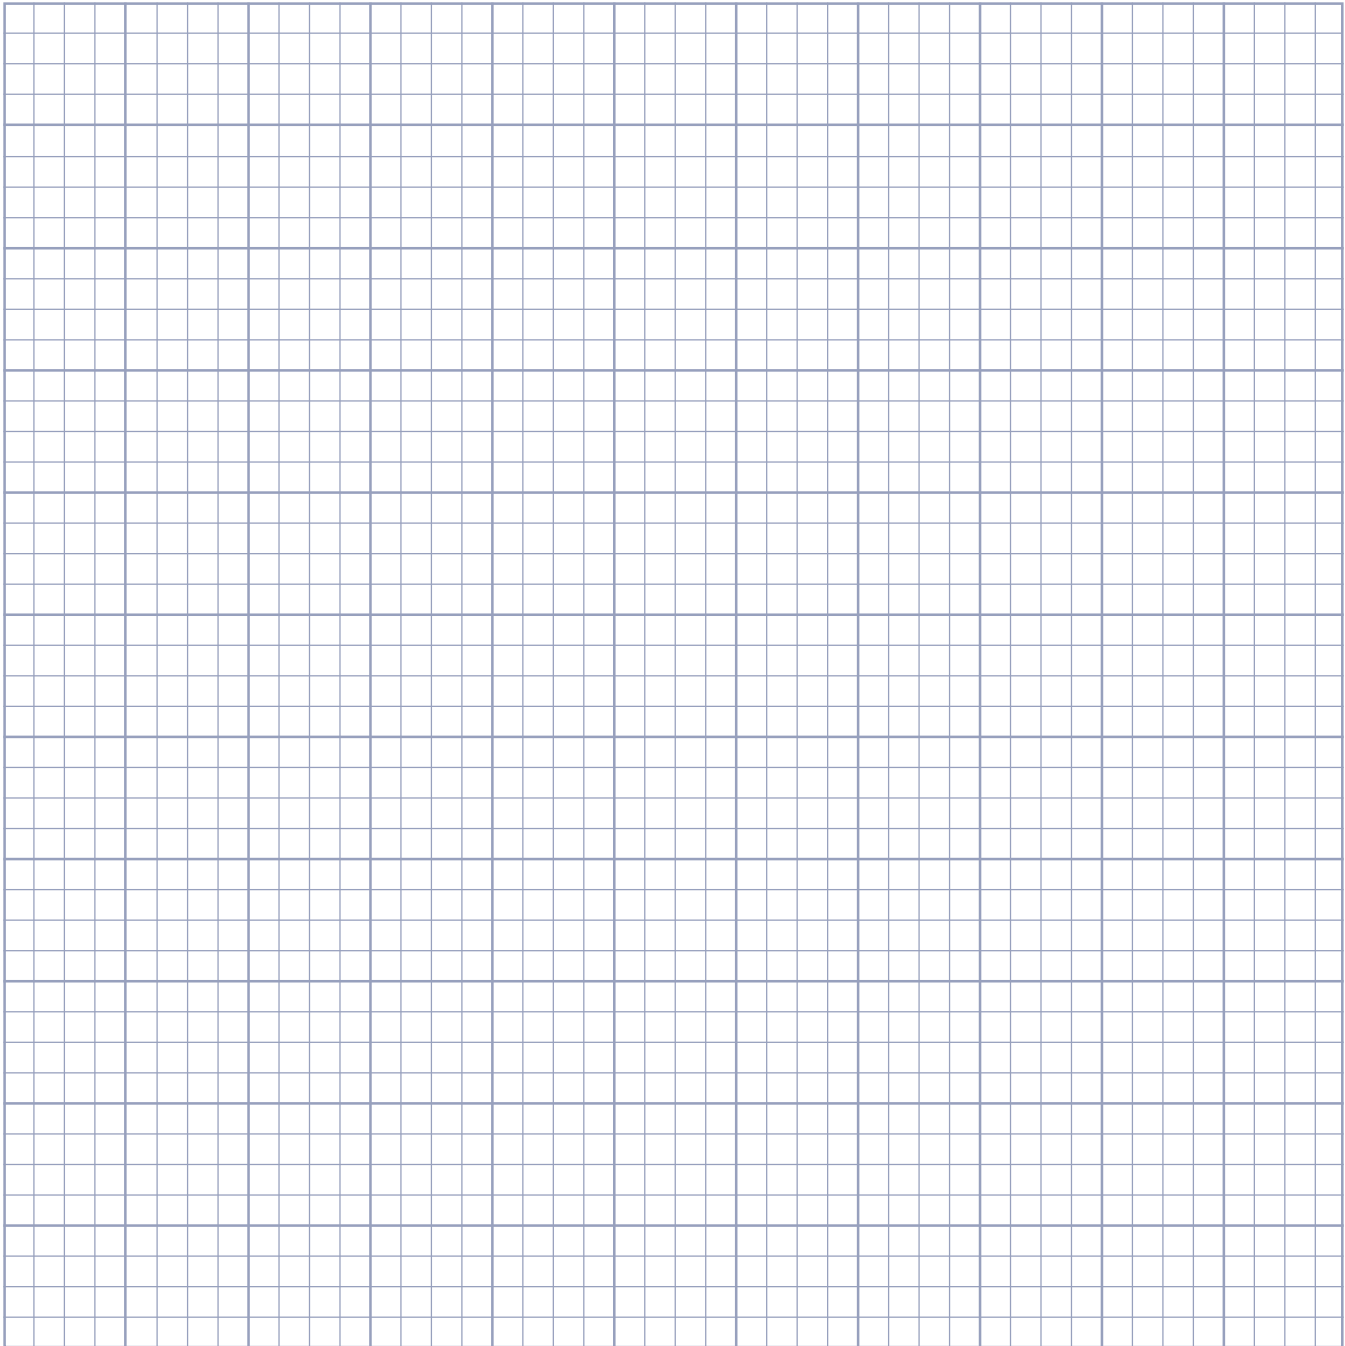




# Mini-Rail® - LS


## Miniature Lead Screw - Driven Slides

### MINI-RAIL® LS - LEAD SCREW DRIVEN


- Right hand rolled thread
- 304 stainless steel screw with PTFE coating
- Self-lubricating Polyacetal, anti-backlash nut
- Lengths up to 640 mm
- Eight (8) leads available
- Optional hand brake

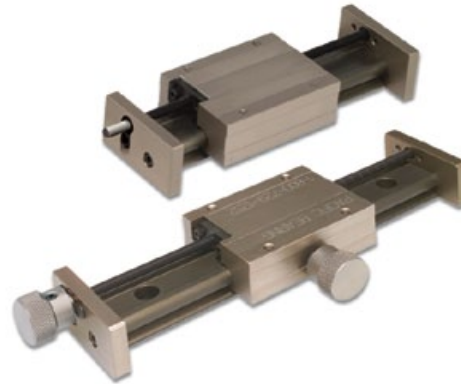

#### MR15LS

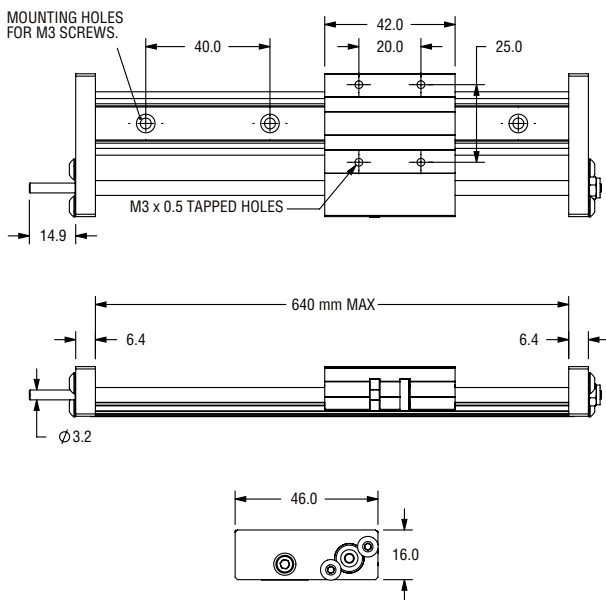


#### MR20LS

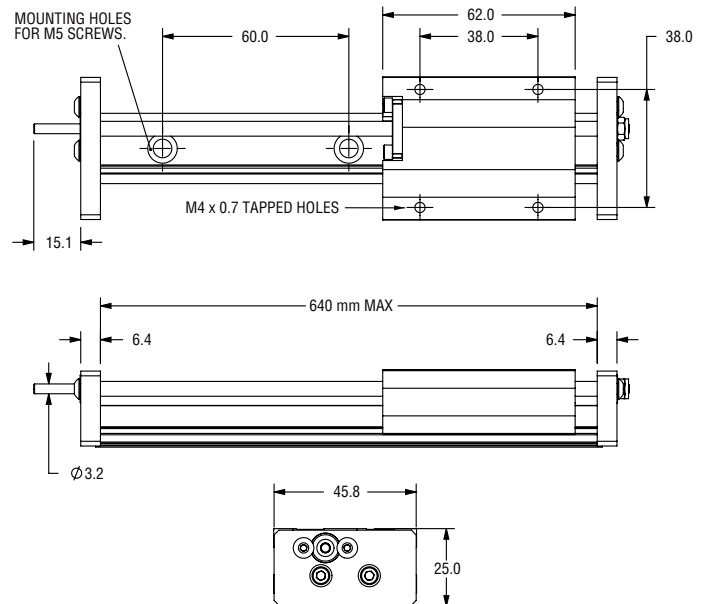

**NOTES:** Maximum length for lead screw driven MR is 640 mm.  
Standard and cut-to-length rail ends are NOT coated. Fully coated rails are available upon request.


### ORDERING INFORMATION

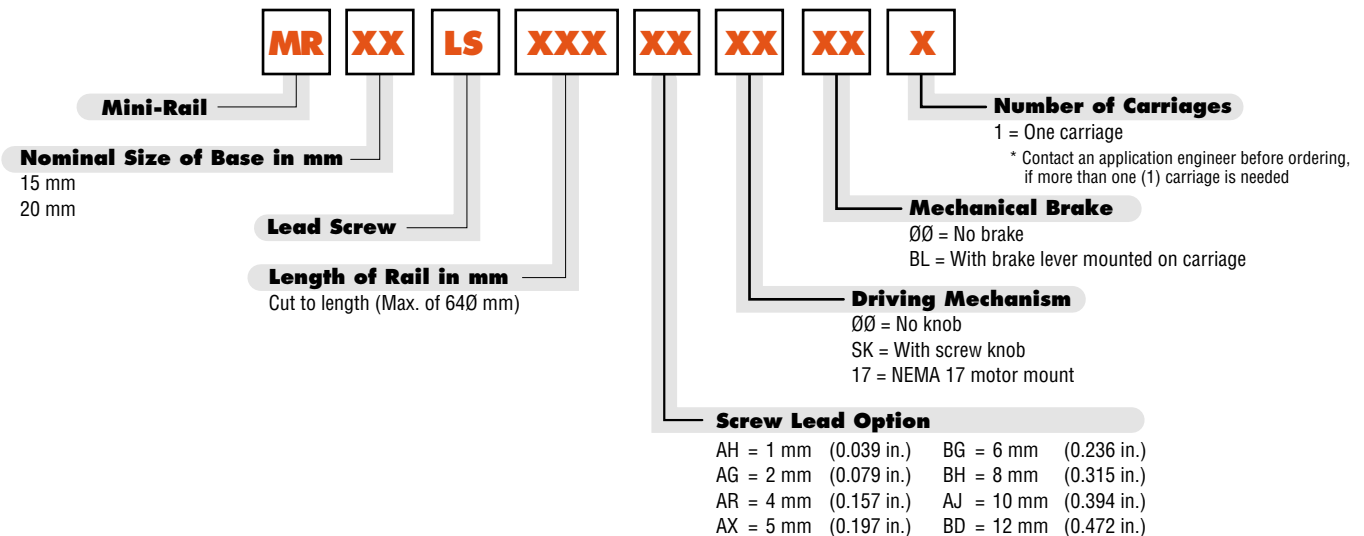




### MINI-RAIL® MS - LEAD SCREW DRIVEN

- 304 stainless steel screw with PTFE coating
- Robust design - outstanding reliability
- Fewer parts - less maintenance
- Preloaded Polyacetal, anti-backlash nut
- High torque stepper motor 42 mm (NEMA 17)
- Low cost
- Lengths up to 640 mm
- Ball bearing supports
- Integral screw for MR20 (coupling used for MR15)
- Eight (8) leads available

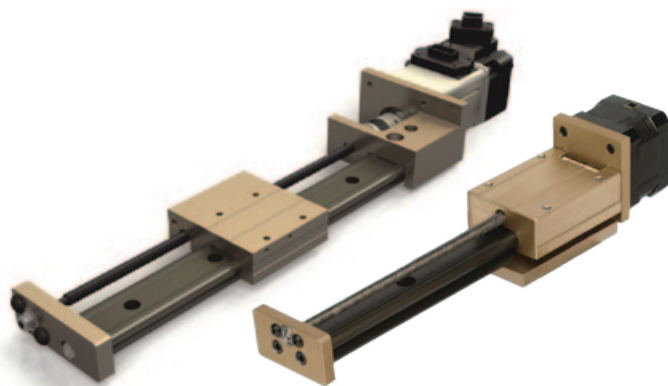


#### MR20MS

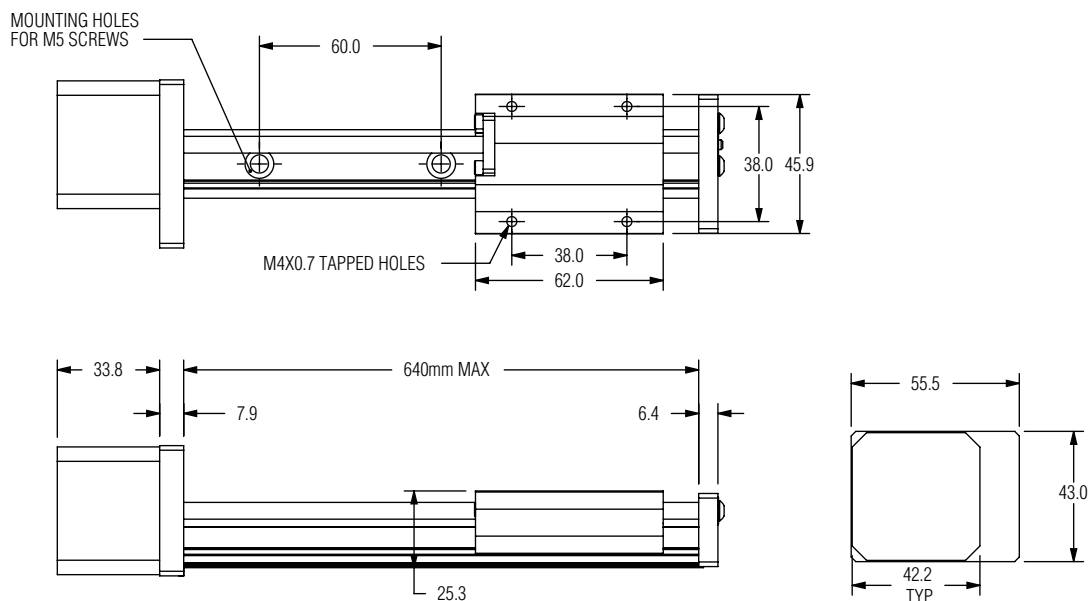

**NOTES:** Maximum length for lead screw driven MR is 640 mm.  
Standard and cut-to-length rail ends are NOT coated. Fully coated rails are available upon request.

### ORDERING INFORMATION

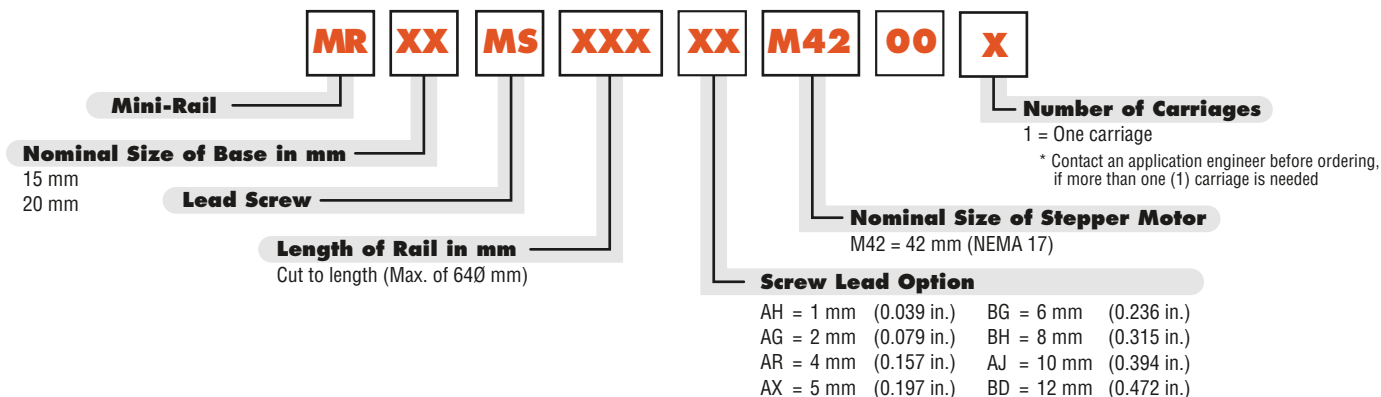





# Mini-Rail® LS/MS

## Technical Information

### STATIC LOAD DATA

The numbers below are for rails in a static condition. Refer to the calculations below to establish dynamic parameters.

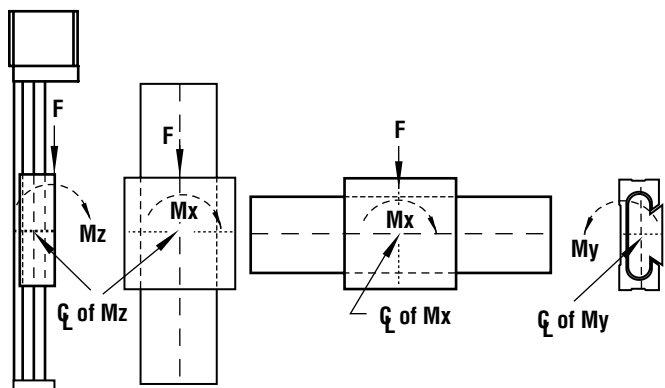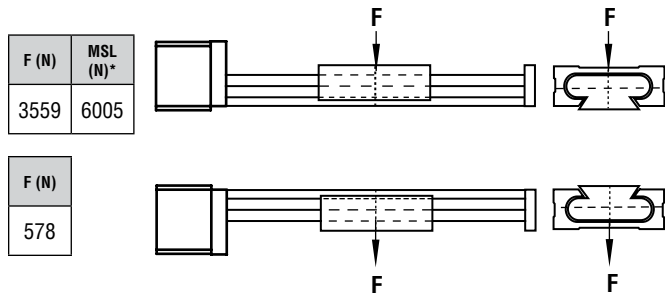

F (N)	Mx (N-m)	My (N-m)	Mz (N-m)
1112	24.9	14.7	14.7

### PERFORMANCE RATINGS FOR LINEAR MOTION

Plane bearings are rated by their limiting PV, which is a combination of load over a given surface area and the velocity.

BEARING MATERIAL	MAX. "PV"	MAX. "P"	MAX. "V" (NO LUBRICATION)
Frelon GOLD®	20,000 (psi x ft./min.) or 0.7 N/mm <sup>2</sup> x m/s	3000 psi or 20.68 N/mm <sup>2</sup>	300 sfm or 1.524 m/s

**PV** = The performance measurement of plane bearings


**PV** = P x V where P = pressure (load) in psi (kgf/cm<sup>2</sup>)

**V** = velocity (speed) in sfm (m/min.)

**NOTE:** All three parameters must be met by an application for the bearing to perform properly.

### CANTILEVERED LOADS

Binding of the carriage will occur if the 2:1 ratio for cantilevered loads and drive forces is exceeded. This principle is not load or force dependent. It is a product of the coefficient of frictions associated with plane bearings. Contact factory or website for additional information.




### LOAD/MOMENT CONVERSION

**N** = 4.45 x (lbs.)

**N-m** = 0.113 x (in-lbs.)

### SIZE 17 STEPPER MOTOR WITH 6 MM (0.236") SCREW

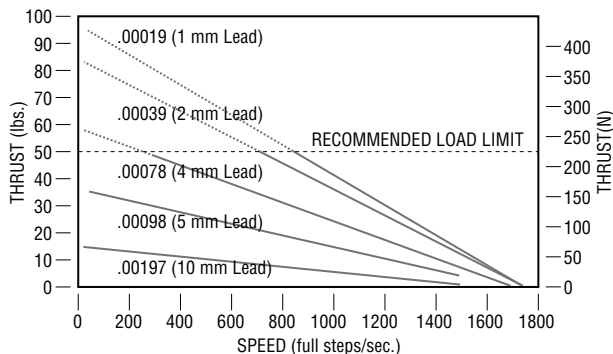

LEAD	LEAD CODE	LINEAR TRAVEL PER STEP	
		mm	Inch
1 mm	AH	0.005	0.000197
2 mm	AG	0.010	0.000394
4 mm	AR	0.020	0.000787
5 mm	AX	0.025	0.000984
6 mm	BG	0.030	0.001181
8 mm	BH	0.040	0.001575
10 mm	AJ	0.050	0.001969
12 mm	BD	0.060	0.002362

Note: 1.8° = 200 steps per revolution





### PRODUCT OVERVIEW

Based on proven Simplicity® linear bearing technology, the Uni-Guide contain Frelon GOLD® self-lubricating bearing material. This material results in no metal to metal contact, while dampening vibrations and shock loads. The Uni-Guide unique two-piece assembly eliminates tolerance stack up and the integrated lightweight packages can drop into existing applications making installation easy. Ideal for low cost automation, positioning tables and packaging equipment.

### FEATURES & BENEFITS

- Two-piece assembly - lightweight and eliminates tolerance stack
- Self-lubricating - Frelon GOLD® provides low wear, low friction, and high strength
- Lengths up to 10' - butt-joinable for longer lengths
- Mounting Flexibility
  - Pre-drilled rails
  - T-slots & mounting holes on carriages
  - Side or top mounting
- Easy drop in unit - no alignment needed
- Drive options
  - Ball
  - Lead screw (includes motor and drive)
  - Belt Driven
- Corrosion-Resistant - ideal in washdown environments
- Pre-engineered - ready to use

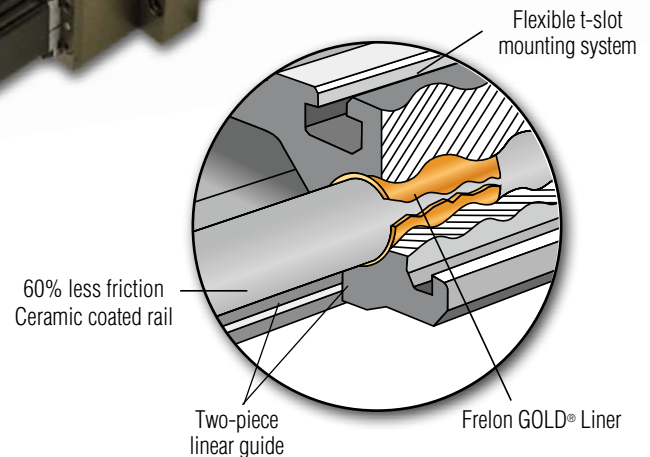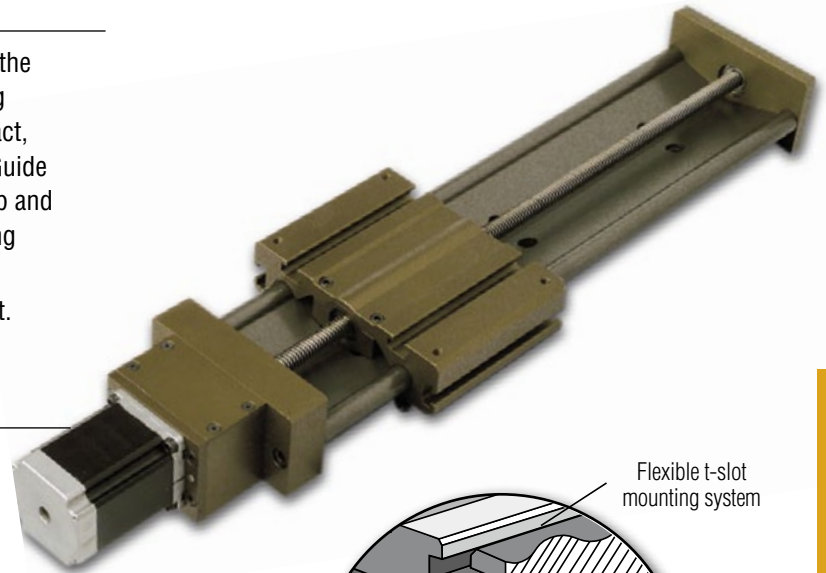


Uni-Guide

### ACCESSORIES\*

- Hand Brake & Crank
- Motor Mount
- Vise Block
- End Block
- Ratchet Pin
- Pin Lock Clamp

### APPLICATION EXAMPLES

(Application examples require accessories. Contact manufacturer for availability)

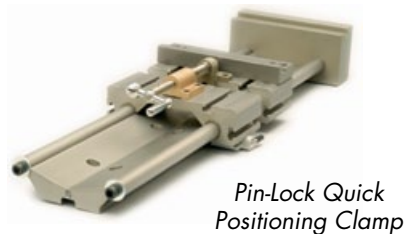

\* Optional configurations and special carriages are available. Contact manufacturer for availability.




# Uni-Guide


## Technical & Ordering Information

### STATIC LOADS WITH NO DRIVE MECHANISM


The numbers below are for guides only in a static condition. The drive mechanism selected (lead screw, ball screw, cylinder, etc.) becomes the limiting factor when calculating maximum load and speed capacities. The user is responsible for determining the maximum capacity for the complete system based on the manufacturer's data for their drive configuration.




SIZE	Fz MAX LOAD (lbs.)	Fz MAX LOAD (N)
D075	500	2,224
D100	750	3,336
D125	1,000	4,448

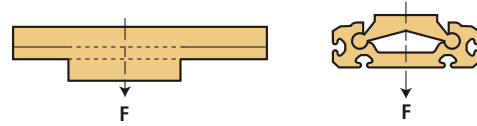

SIZE	Fz (inverted) MAX LOAD (lbs.)	Fz (inverted) MAX LOAD (N)
D075	125	556
D100	190	845
D125	250	1,112

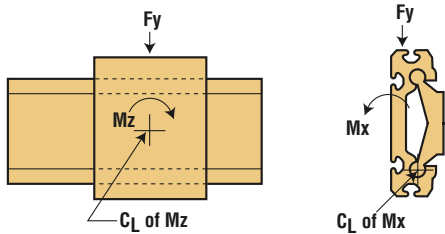

SIZE	Fy MAX LOAD (lbs.)	Mx (in./lbs.)	Mz (in./lbs.)	Fy MAX LOAD (N)	Mx (Nm)	Mz (Nm)
D075	250	340	350	1,112	38	40
D100	375	650	730	1,668	73	82
D125	500	1,200	1,225	2,224	136	138

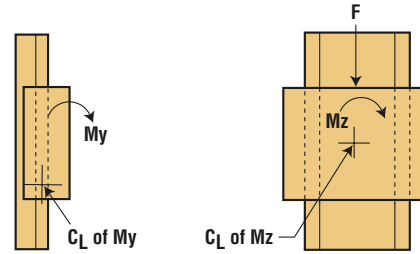


SIZE	My (in./lbs.)	Mz (in./lbs.)	My (Nm)	Mz (Nm)
D075	340	350	38	40
D100	650	730	73	82
D125	1,200	1,225	136	138

Designs must also operate within the following dynamic parameters:

- Maximum Loads (P) = from charts above
- Maximum Speed Dry (V) = 300 ft./min. (1.524 m/s)
- Maximum PV (pressure x velocity) = 20,000 (0.70 N/mm<sup>2</sup> x m/s)
- PV Example: Load = 85 psi  
Speed = 180 ft./min.  
PV = 85 x 180 = 15,300 PV

**NOTE:** Frelon GOLD® bearing material coefficient of friction is 0.125.



If the drive mechanism (lead screw, ball screw, cylinder, etc.) is centered on the carriage, the load may not exceed a 2:1 ratio to the length of the bearings or binding will occur.

### ORDERING INFORMATION



#### Series

D - Standard Uni-Guide

#### Carriage Options

No Entry - Standard Carriage  
L - Extended Length Carriage

#### Nominal Size

075mm, 100mm, 125mm  
Based on mm from shaft center-to-center

#### Drive Options

No Entry - No Drive Mechanism  
M - Right Hand Lead Screw with Standard Pitch  
M1 - Right Hand Lead Screw with Optional Pitch  
**Notes:** Screw options require attaching collar.  
Call the factory for other optional drive mechanisms.

#### Data Entry Option

No Entry - No Options  
M - Optional MMI Keypad  
(Man-to-Machine Interface)

#### Power and Control Options

No Entry - No Power Options  
P - Standard Motor with Motor Mount, Programmable Drive, Cables and Software (must have "N" in Drive Mounting Option)  
**Note:** Kits available for NEMA motor

#### Overall Rail Length





"D" Series - enter length of rail in inches xxx.xxx (EX: 6" = 006.000)

#### Drive Mounting Options

No Entry - No Drive Mounting Options  
H - Hand Crank  
N - NEMA Standard Motor Mount  
HB - Handbrake (requires handcrank and screw)  
CHB - Carriage Handbrake (not offered with screw driven options)

**Metric Mounting Hole Option Retired -  
Click Here for Product Migration Matrix**



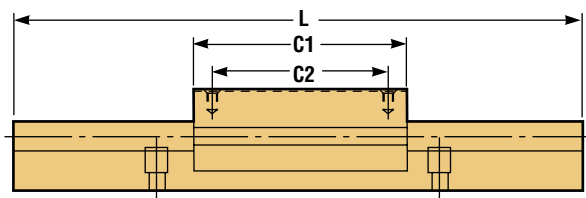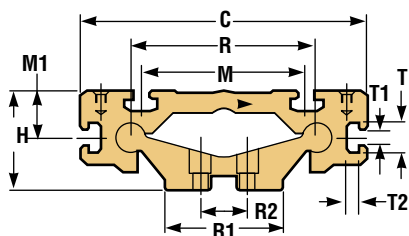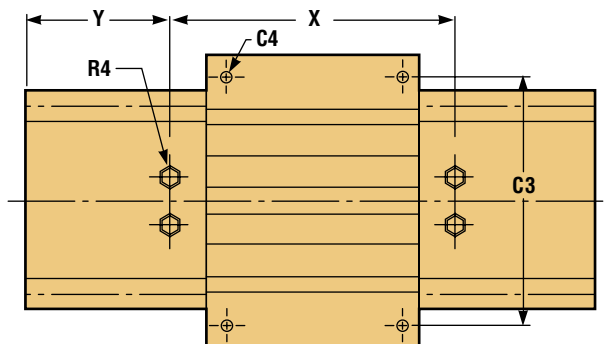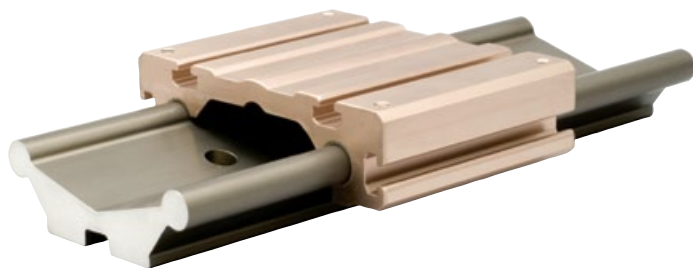

Uni-Guide

### STANDARD INCH SERIES WITH NO DRIVE MECHANISM (inches)

PART NUMBER	R	R1	R2	X	R4		Y	H	C	C1		C2		C3	C4		M	M1	L MAX-FEET
					BOLT SIZE					STANDARD	STANDARD	EXTENDED	EXTENDED		BOLT SIZE				
D075-xxx	2.95	2	0.75	4	1/4		2	1.625	4.6	3.5	3	4.5	4	4	10-32		2.6	.819	12
D100-xxx	3.94	2.6	1	6	5/16		3	2.125	6.1	4.5	3.75	6	5.25	5.25	1/4-20		3.5	1.02	
D125-xxx	4.92	3.3	1.25		3/8		3	2.625	7.6	6	5.25	7.5	6.75	6.75	5/16-18		4.33	1.30	

### CARRIAGE TYPES

PART NO.	DRILL	DEPTH	TAP	DEPTH
D075-xxx	.159	.534	10-32	.440
D100-xxx	.201	.750	1/4-20	.500
D125-xxx	.257		5/16-18	.625

### T-SLOT INFORMATION (inches)

PART NO.	T	T1	T2
D075-xxx	.590	.256	.236
D100-xxx	.661	.319	.268
D125-xxx			

### STANDARD LENGTHS CHART (inches)

PART NO.	8"	12"	16"	18"	20"	24"	28"	30"	32"	36"	40"	42"	48"
D075-xxx	X		X		X		X		X		X		
D100-xxx		X		X		X		X		X		X	X
D125-xxx													

### WEIGHTS

PART NO.	RAIL PER INCH	STANDARD CARRIAGE	EXTENDED CARRIAGE
	(lbs.)	(lbs.)	(lbs.)
D075-xxx	0.19	0.98	1.26
D100-xxx	0.32	2.12	2.82
D125-xxx	0.48	4.56	5.7

### METRIC SERIES WITH NO DRIVE MECHANISM (mm)

PART NUMBER	R	R1	R2	X	R4		Y	H	C	C1		C2		C3	C4		M	M1	L MAX-FEET
					BOLT SIZE					STANDARD	STANDARD	EXTENDED	EXTENDED		BOLT SIZE				
DM075-xxx	75	51	20	120	M 6		60	41.3	117	85	73	110	98	105	M 5		66	16.5	3.66m
DM100-xxx	100	66	25	150	M 8		75	54	155	115	95	150	120	135	M 6		89	26	
DM125-xxx	125	84	30	200	M 10		100	66.7	193	130	130	170	170	175	M 8		110	33	

**UPDATED PRODUCT INFORMATION**  
**CLICK HERE**

### T-SLOT INFORMATION FOR THE PRODUCT MIGRATION MATRIX

PART NO.	T	T1	T2
DM075-xxx	15.0	6.5	6.0
DM100-xxx	16.8	8.1	6.8
DM125-xxx			

RAIL Ø APPROXIMATE	
D075 =	.470 = 12mm
D100 =	.630 = 16mm
D125 =	.820 = 22mm


Straightness - ±.002"/ft



# Uni-Guide - D075


## Slides, Tables & Stages

### D075

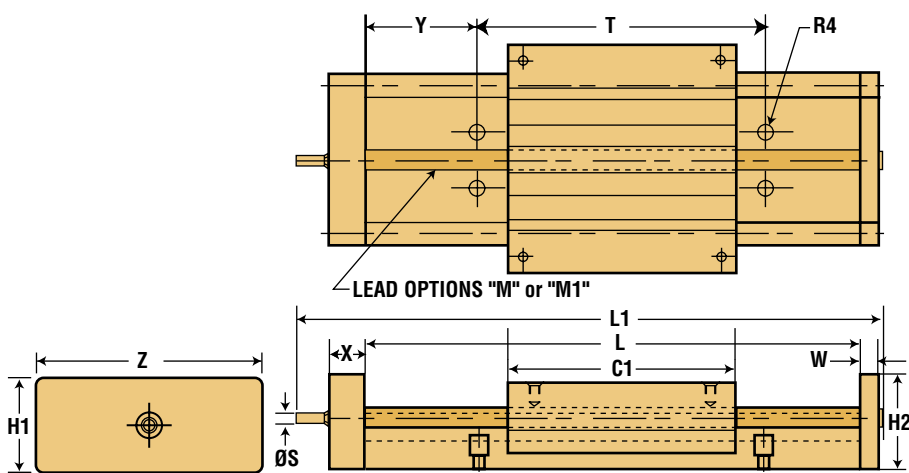

### OPTIONAL HAND BRAKE

NOTE: available only with optional hand crank

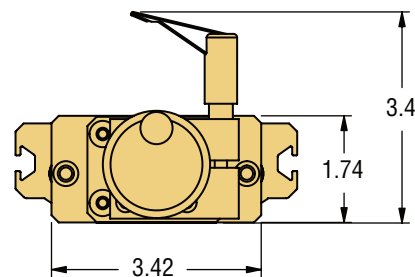


PART NO.	P	H
D075AHB	2.31	1.75

PART NO.	STROKE	L	L1	C1	NOMINAL SCREW DIA.	STANDARD LEAD	OPTIONAL LEAD	S	Y	T	R4	W	X	Z	H1	H2
	(L-C1)					M	M1									
D075xx-12	8.5	12	13.93	3.5	10 mm	6 mm	12 mm	0.187	2	4	1/4	0.375	0.625	3.42	1.75	1.625
D075xx-16	12.5	16	17.93													
D075xx-20	16.5	20	21.93													
D075xx-24	20.5	24	25.93													

NOTE: Optional leads may be available - consult factory.


### OPTIONAL HAND CRANK



PART NO.	P	H
75H	2.31	1.75

\*See order codes on page 199 to integrate.


### OPTIONAL MOTOR MOUNT ATTACHMENT

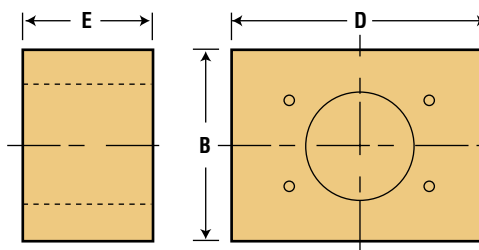


PART NO.	MOTOR MOUNT	B	E	D
75N	NEMA 17	2	1.81	3.25

### LOAD & SPEED DATA FOR STANDARD LEAD SCREW DRIVEN (HORIZONTAL ORIENTATION)

#### D075A-xxx

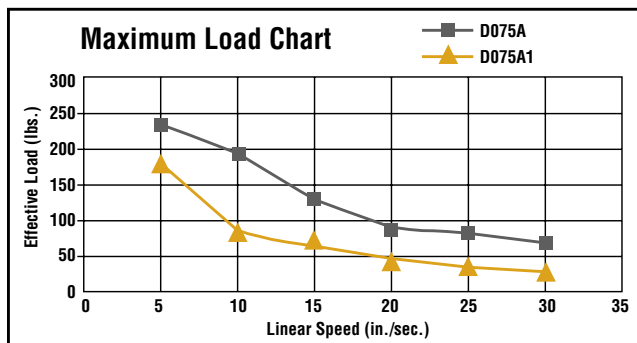


#### D075A-xxx

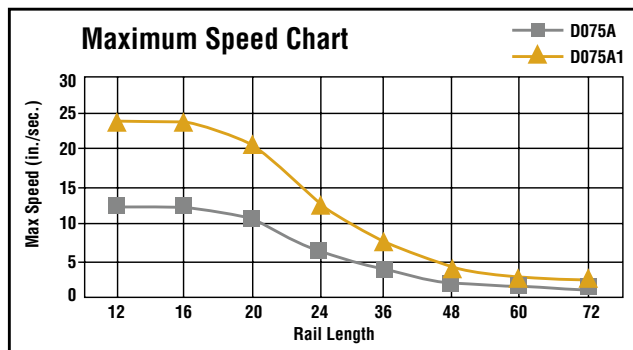

NOTE: Optional drives are available: ball screws, cylinders, linear motors, and belt drives.




### D100

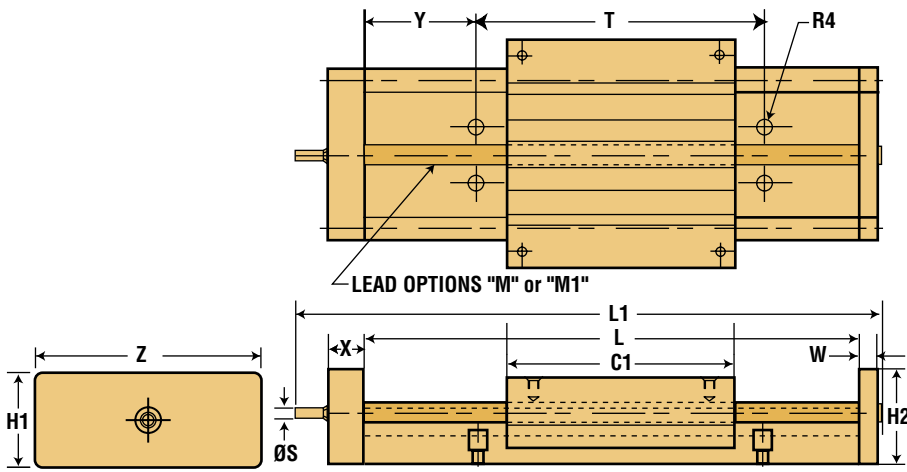

### OPTIONAL HAND BRAKE

NOTE: available only with optional hand crank

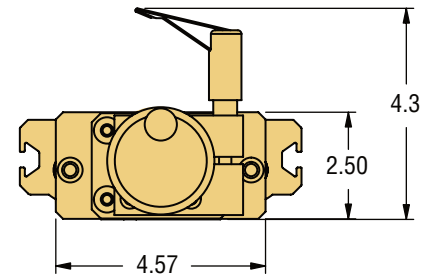


PART NO.	P	H
DO100AHB	2.31	1.75

PART NO.	STROKE	L	L1	C1	NOMINAL SCREW DIA.	STANDARD LEAD	OPTIONAL LEAD	S	Y	T	R4	W	X	Z	H1	H2
	(L-C1)					M	M1									
D100xx-12	7.5	12	14.61	4.5	12 mm	6 mm	12 mm	0.314	3	6	5/16	0.5	1	4.56	2.5	2.500
D100xx-18	13.5	18	20.61													
D100xx-24	19.5	24	26.61													
D100xx-30	25.5	30	32.61													
D100xx-48	43.5	48	50.61													

NOTE: Optional leads may be available - consult factory.


### OPTIONAL HAND CRANK



PART NO.	P	H
100H	2.31	2.25

\*See order codes on page 199 to integrate.


### OPTIONAL MOTOR MOUNT ATTACHMENT

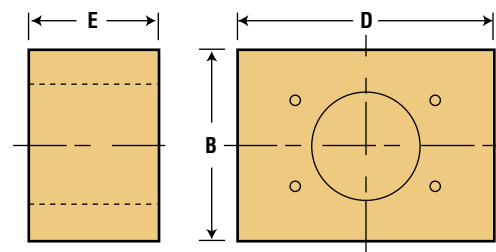


PART NO.	MOTOR MOUNT	B	E	D
100N	NEMA 23	2.5	1.81	3.25

### LOAD & SPEED DATA FOR STANDARD LEAD SCREW DRIVEN (HORIZONTAL ORIENTATION)

#### D100A-xxx

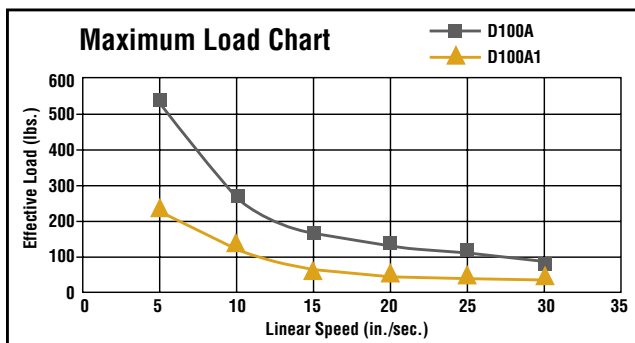

#### D100A-xxx

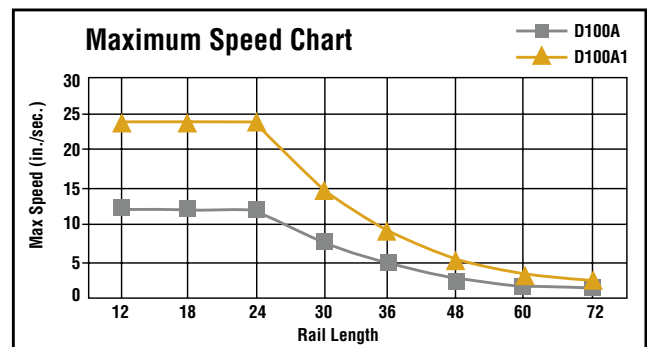


NOTE: Optional drives are available: ball screws, cylinders, linear motors, and belt drives.



# Uni-Guide - D125


## Slides, Tables & Stages

### D125

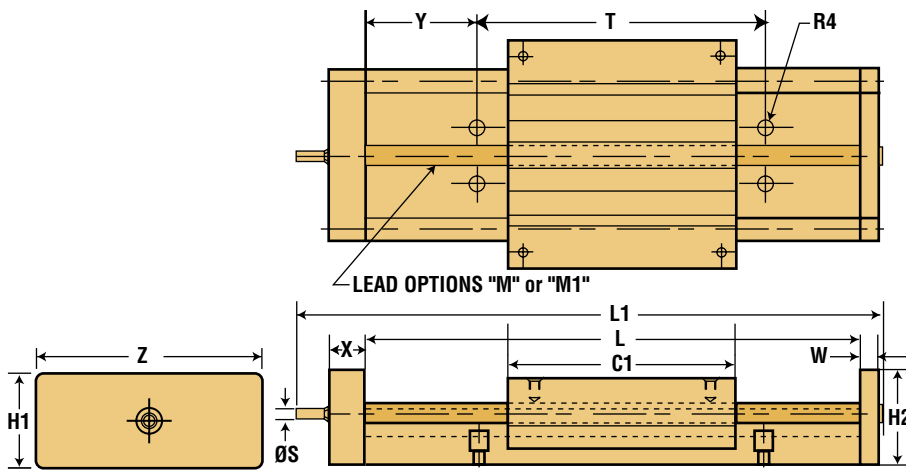

### OPTIONAL HAND BRAKE

NOTE: available only with optional hand crank

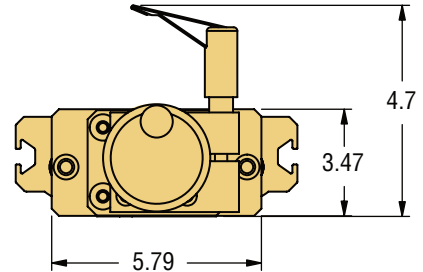


PART NO.	P	H
D0125AHB	2.31	1.75

PART NO.	STROKE	L	L1	C1	NOMINAL SCREW DIA.	STANDARD LEAD		S	Y	T	R4	W	X	Z	H1	H2
	(L-C1)					M	M1									
D125xx-12	6	12	14.85	6	16 mm	5 mm	12 mm	0.314	3	6	3/8	0.5	1	5.78	3.5	2.500
D125xx-18	12	18	20.85													
D125xx-24	18	24	26.85													
D125xx-30	24	30	32.85													
D125xx-36	30	36	38.85													
D125xx-48	42	48	50.85													
D125xx-60	54	60	62.85													

NOTE: Optional leads may be available - consult factory.


### OPTIONAL HAND CRANK



PART NO.	P	H
125H	2.31	3.25

\*See order codes on page 199 to integrate.


### OPTIONAL MOTOR MOUNT ATTACHMENT

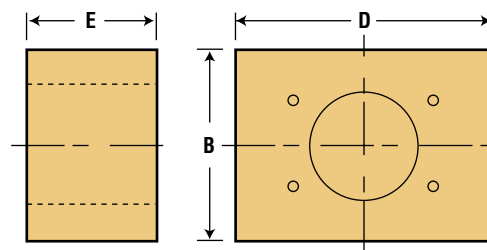


PART NO.	MOTOR MOUNT	B	E	D
125N	NEMA 34	3.5	2.3	4.25

### LOAD & SPEED DATA FOR STANDARD LEAD SCREW (HORIZONTAL ORIENTATION)

#### D125A-xxx

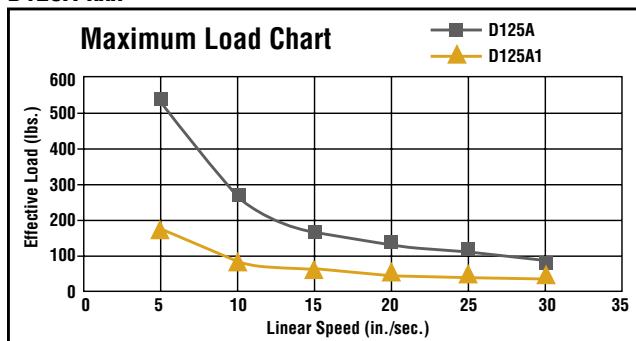


#### D125A-xxx

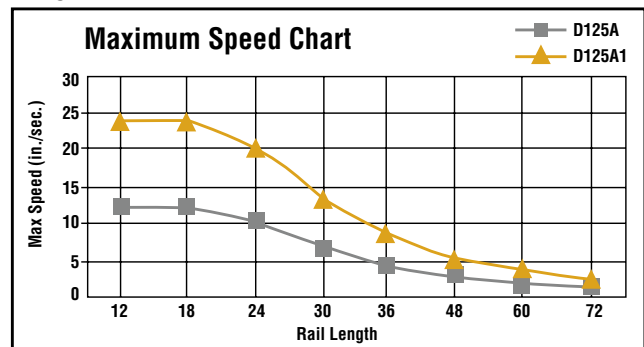

NOTE: Optional drives are available: ball screws, cylinders, linear motors, and belt drives.

# Design & Layout Options

Name: _____	Date: _____
Dept.: _____	Phone: _____ Fax: _____
Company: _____	Machine Type/Name: _____
Email: _____	
Address: _____	
_____	

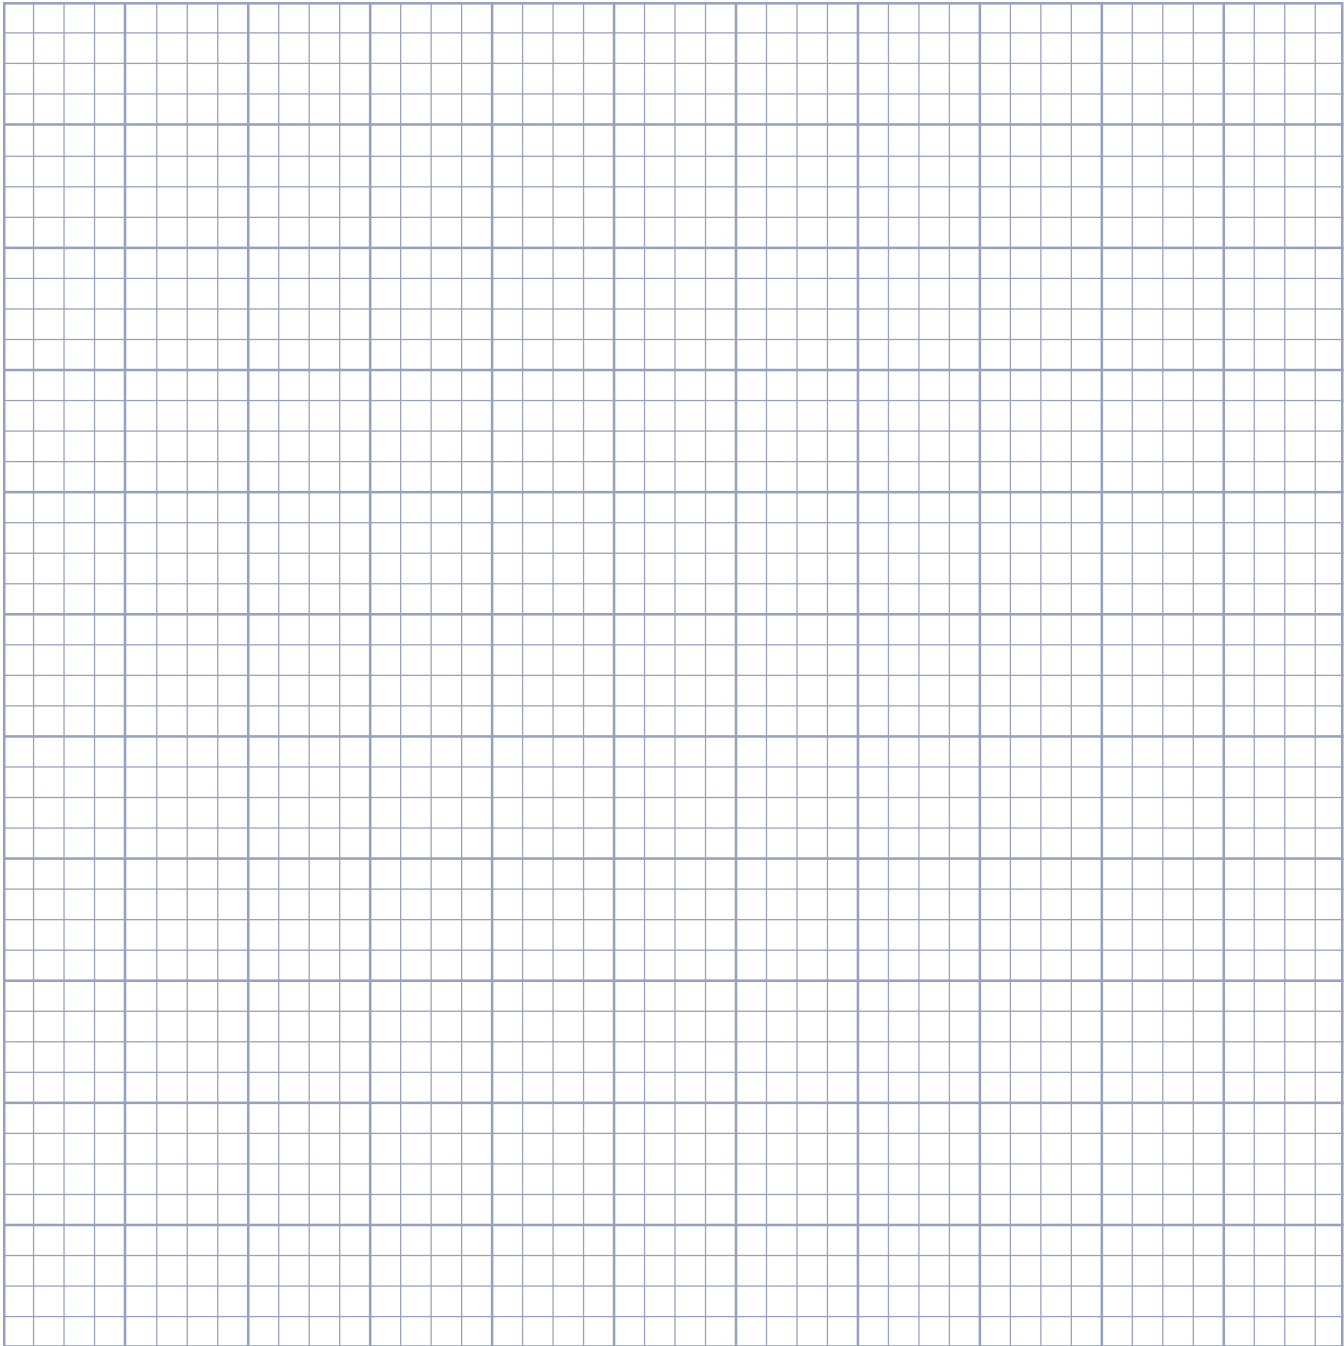



# Redi-Rail® Linear Guides


## Product Overview

### PRODUCT OVERVIEW

- Sealed double row bearings provide maintenance free, smooth linear guidance
- Side adjusted preload makes greatly simplifies assembly and installation
- Withstands temperatures up to 180°F
- Butt-joinable for longer length applications
- Available in Inch or ISO Metric

### ADJUSTING SLIDE PRELOAD

The preload of a slide should be properly set from the factory, but if you must adjust it yourself, here are some simple steps to follow.

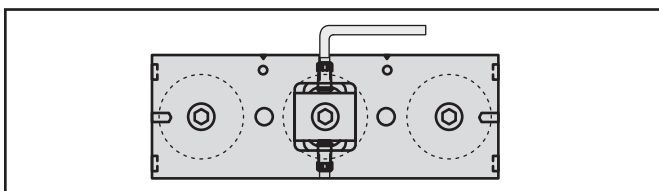

#### Metric Series

1. To loosen the eccentric (center) roller, use an Allen wrench to loosen the screw that is on the side of the mounting block. Be sure to loosen the screw that is on the side of the direction you want the roller to move.
2. When it is loose, tighten the set screw on the opposite side of the block. This will move the roller and mounting stud.
3. Make a very small change, retighten the first set screw, and try it out. If the preload is too loose, you will feel the slider rock and you will hear a slight “clunk.” If it is too tight, the slider will roll rough, like riding a bicycle on a gravel road.
4. Move the slide along the length of the rail by hand. Adjust it so that it does not feel loose anywhere. It may take you several times to get the proper adjustment.
5. Make sure the rollers are tightened with the proper adjustment prior to operation.

### SLIDER ORIENTATION

The 3-Roller slide should be installed in the rail so the load is shared on the two outside rollers. The orientation marks indicate how to align the slider with the load direction.



**redi-rail®**

### LUBRICATION - RAILS & BEARINGS


The rollers are internally lubricated for life, but the rails must always have a layer of grease. As a guideline, reapply fresh grease every 50,000 cycles.

### SLIDER ORIENTATION

The 3-Roller slide should be installed in the rail so the load is shared on the two outside rollers. The orientation marks indicate how to align the slider with the load direction.

### MOUNTING SLIDER BODY & MAX CAPACITY

Below are recommended bolt tightening torques for mounting to the slide body. Be sure to use bolts that are long enough to obtain full thread engagement.

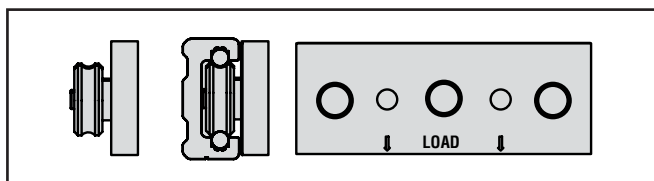


### MOUNTING TORQUE

PART NUMBER	IN-LBS. TORQUE	NM TORQUE
RRS14 RRS30	25	3
RRS18 RRS45	70	8
RRS65	150	24



### LIFE CALCULATIONS



Cd = Dynamic capacity (LC)  
 Cr = Radial capacity  
 Ca = Axial capacity  
 Mx, My, Mz = Moment capacities

#### Conversions

newton (N) x 0.2248 = lbs.  
 (lbf) meter x 0.0397 = inch  
 newton - meter (Nm) x 8.851 = in.-lbs.

INCH PART NO.	Cr (lbs.)	Ca (lbs.)	Mx (in.-lbs.)	My (in.-lbs.)	Mz (in.-lbs.)
RRS14	336	79	21	54	201
RRS18	847	168	67	153	677
METRIC	(N)	(N)	(Nm)	(Nm)	(Nm)
RRS30	1,002	330	1.8	5.5	12.5
RRS45	2,660	827	6.6	19.9	47.9
RRS65	5,950	1,678	19.0	58.2	154.7

To calculate an approximate life for redi-rail sliders, use the following equation.

#### Inch Series

The value of  $L_{RR}$  is in meters

$$L_{RR} = 10^7 \cdot (Cd / (\text{LoadEquiv} \cdot RF))^{3.0} \text{ (inches)}$$

$LC_{RRS}$  = Slider Life Capacity which is found in the table

LoadEquiv = Equivalent Radial Load found from the following equation:

$$\text{LoadEquiv} = Cr \cdot \left( \frac{\text{LoadAxial}}{Ca} + \frac{M_x}{M_x \text{ Max}} + \frac{M_y}{M_y \text{ Max}} + \frac{M_z}{M_z \text{ Max}} \right) + \text{LoadRadial}$$

PART NO.	MAX SPEED (fpm)	MAX SPEED (ipm)	Cd
RRS14	500	6000	421
RRS18	800	9,600	1,032

#### Metric Series

The value of  $L_{RR}$  is in meters

$$L_{RR} = (Cd / \text{LoadEquiv} \cdot RF)^{3.0} \times 100,000 \text{ meters}$$

Cd = Slider Life Capacity which is found in the table

LoadEquiv = Equivalent Radial Load found from the following equation:

$$\text{LoadEquiv} = Cr \cdot \left( \frac{\text{LoadAxial}}{Ca} + \frac{M_x}{M_x \text{ Max}} + \frac{M_y}{M_y \text{ Max}} + \frac{M_z}{M_z \text{ Max}} \right) + \text{LoadRadial}$$

PART NUMBER	MAX SPEED (m/min)	MAX SPEED (m/s)	Cd (N)
RR30	300	5.0	1,440
RR45	420	7.0	4,404
RR65	480	8.0	10,200

**NOTE:** Reduction factors apply to both inch and metric series






RF = Reduction Factor of the Application or Environment

= 1.0 to 1.5 for very clean, low speed (<30% Max), low shocks

= 1.5 to 2.0 for some dirtiness, moderate speed (30% Max to 75% Max), medium shocks and vibration

= 2.0 to 3.0 for heavy dirt & dust, high speeds (>75% Max) and heavy shocks & vibrations

### LOAD COMPARISON GRAPHS

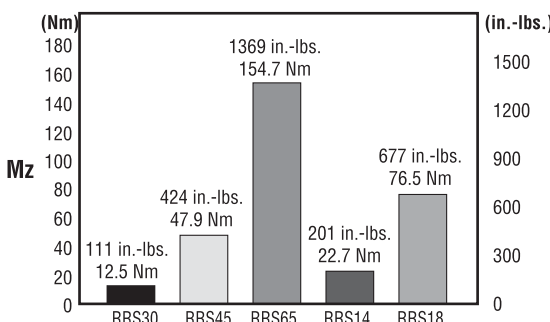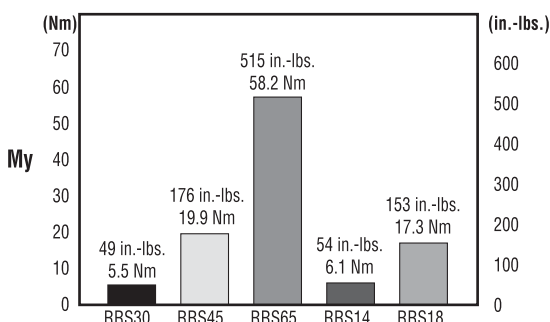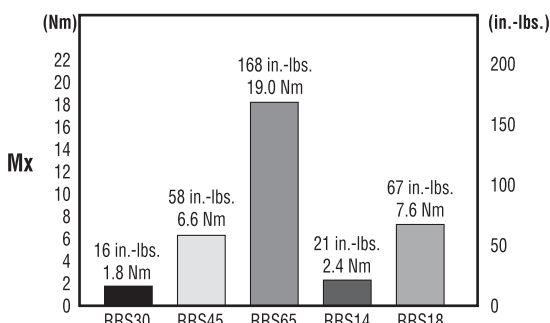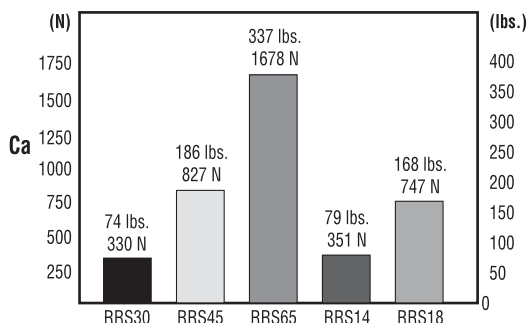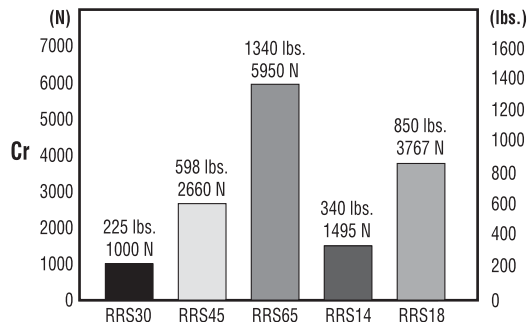





# RRS14 Slide

## Redi-Rail® Linear Guides - Inch Series


### RRS14 SLIDE

- Low cost precision
- Factory adjusted
- Sealed bearings
- Solid bearing mounting system
- Up to 19' lengths
- Gothic arch rollers
- Aluminum alloy body
- Rollers are 52100 steel, sealed against contamination, and are mounted with hardened steel mounting accessories
- Not available with seals
- Maximum temperature approximately 180°F

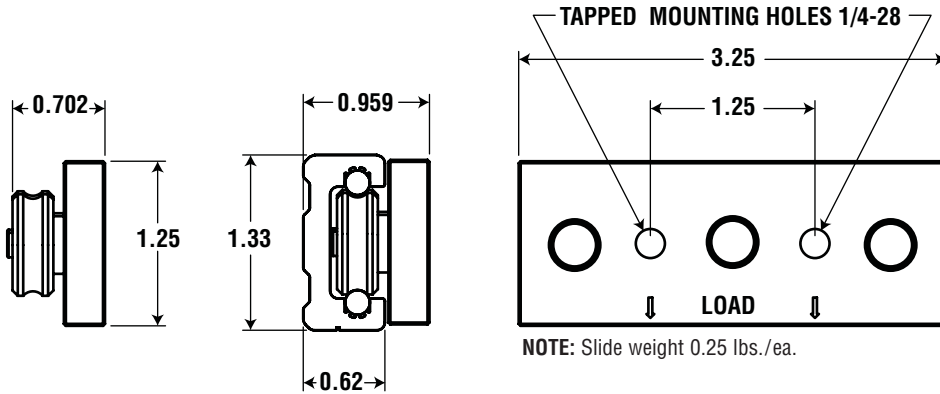

Redi-Rail® RRS14

### ORDER INFORMATION

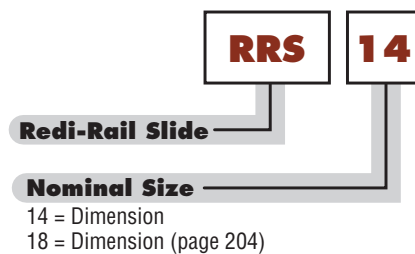

EXAMPLE:  
Slider size 14



# RR14 Rail

Load Capacity to 340 lbs.



## RR14 RAIL

### SUGGESTED RAIL LENGTHS & DIMENSIONS (Inches)


PART NUMBER	LENGTH	HOLES	Y	WT. (lbs./ft.)
RR14-12	12	4	0.75	0.56
RR14-24	24	7	1.50	
RR14-36	36	11	0.50	
RR14-48	48	14	1.25	
RR14-60	60	17	2.00	
RR14-72	72	21	1.00	
RR14-84	84	24	1.75	
RR14-96	96	28	0.75	

NOTE: Suggested lengths can be cut and are available up to 19' (6m).



Aluminum alloy with hardened steel raceways inserted.

### LIFE CALCULATIONS




Cd = Dynamic capacity (LC)  
 Cr = Radial capacity  
 Ca = Axial capacity  
 Mx, My, Mz = Moment capacities

#### Conversions


newton (N) x 0.2248 = lbs.  
 (lbf) meter x 0.0397 = inch  
 newton - meter (Nm) x 8.851 = in.-lbs.

PART NUMBER	Cd (lbs.)	Cr (lbs.)	Ca (lbs.)	Mx (in-lbs.)	My (in-lbs.)	Mz (in-lbs.)
RRS14	421	340	79	21	54	201

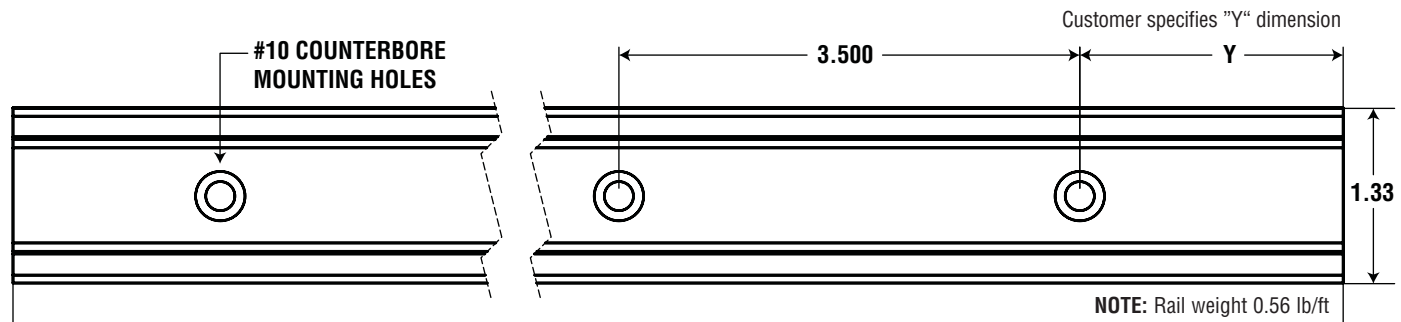

Redi-Rail® RR14

### ORDER INFORMATION

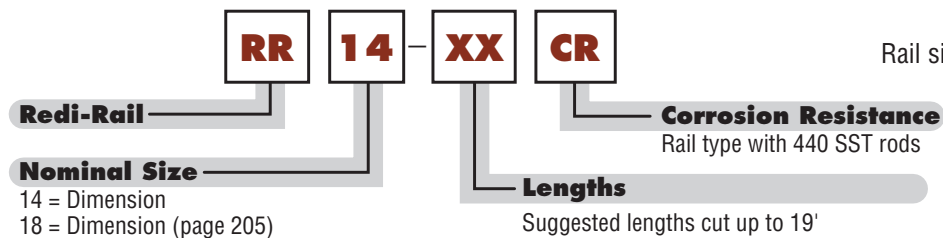

EXAMPLE: RR14-36  
 Rail size 14 cut to 36" long





# RRS18 Slide

## Redi-Rail® Linear Guides


### RRS18 SLIDE

- Low cost precision
- Factory adjusted
- Sealed bearings
- Solid bearing mounting system
- Up to 5.79m lengths
- Gothic arch rollers
- Aluminum alloy body
- Rollers are 52100 steel, sealed against contamination, and are mounted with hardened steel mounting accessories
- Not available with seals
- Maximum temperature approximately 180°F

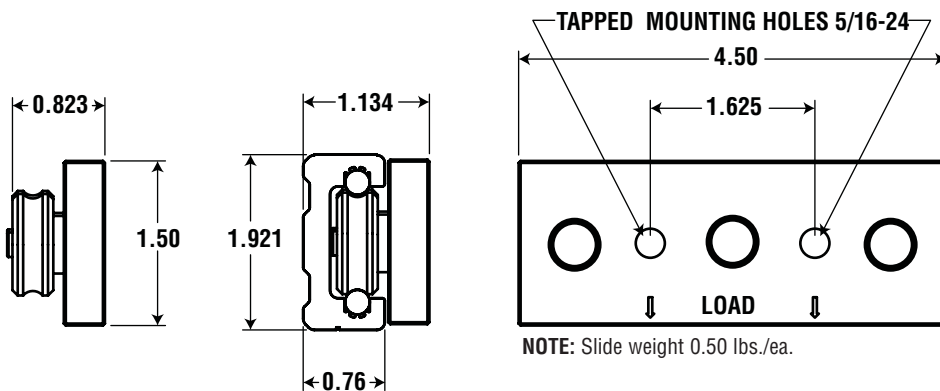

### ORDER INFORMATION

EXAMPLE: RRS18

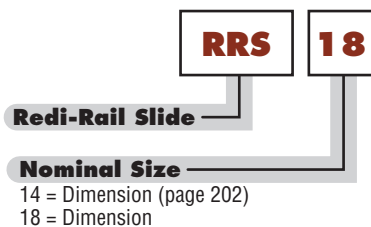



## RR18 RAIL

### SUGGESTED RAIL LENGTHS & DIMENSIONS (Inches)


PART NUMBER	LENGTH	HOLES	Y	WT. (lbs./ft.)
RR18-12	12	4	0.75	0.85
RR18-24	24	7	1.50	
RR18-36	36	11	0.50	
RR18-48	48	14	1.25	
RR18-60	60	17	2.00	
RR18-72	72	21	1.00	
RR18-84	84	24	1.75	
RR18-96	96	28	0.75	

NOTE: Suggested lengths can be cut and are available up to 19' (6m).



Aluminum alloy with hardened steel raceways inserted.

### LIFE CALCULATIONS




Cd = Dynamic capacity (LC)  
 Cr = Radial capacity  
 Ca = Axial capacity  
 Mx, My, Mz = Moment capacities


#### Conversions

newton (N) x 0.2248 = lbs.  
 (lbf) meter x 0.0397 = inch  
 newton - meter (Nm) x 8.851 = in.-lbs.

PART NUMBER	Cd (lbs.)	Cr (lbs.)	Ca (lbs.)	Mx (in.-lbs.)	My (in.-lbs.)	Mz (in.-lbs.)
RRS18	1,032	850	168	67	153	677

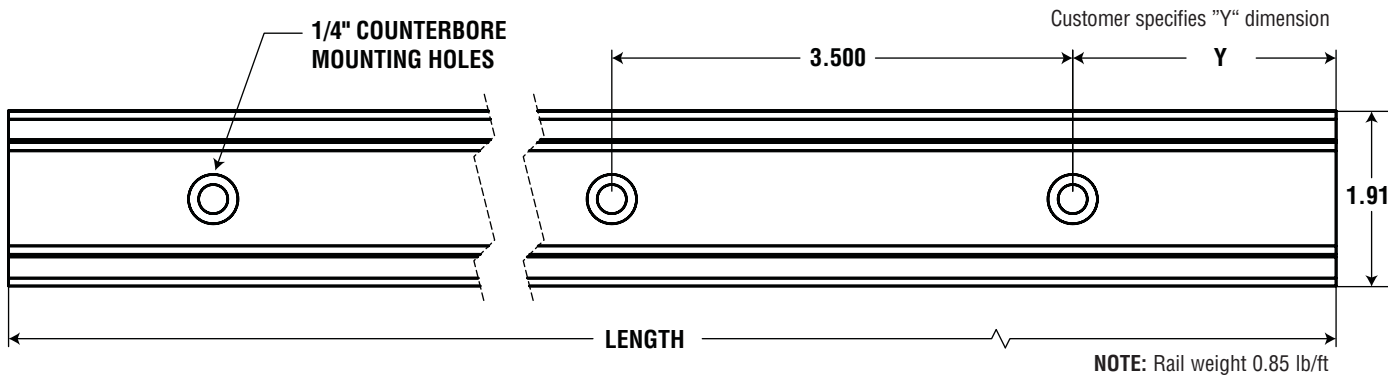

### ORDER INFORMATION

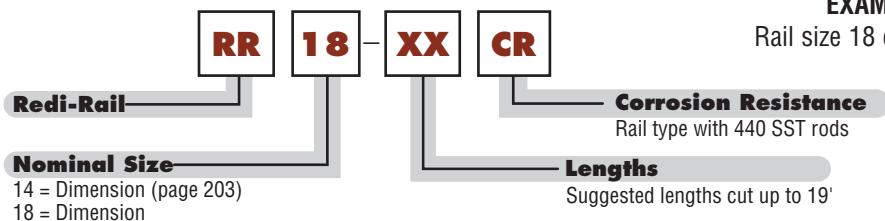

EXAMPLE: RR18-36  
 Rail size 18 cut to 36" long

Redi-Rail® RR18




# RRS30 Slide


## Redi-Rail® Linear Guides - ISO Metric

### RRS30 SLIDE

- 5.79 Meter Lengths
- Sealed Bearings
- Integral Seals
- Easy Adjusting
- Gothic Arch Rollers
- Solid Roller Mounting
- Slider body is aluminum alloy.
- Maximum temperature approximately 80°C.
- Gothic rollers are 52100 steel, hardened and ground, lubricated for life and sealed against contamination.
- Oil-filled plastic or UHMW spring loaded seals keep contamination clear of the rollers.
- Custom roller configurations can be designed, engineered, and manufactured to meet your specific requirements.
- Patented pre-load adjustment eliminates eccentrics.





### ROLLER/SHAFT INTERFACE

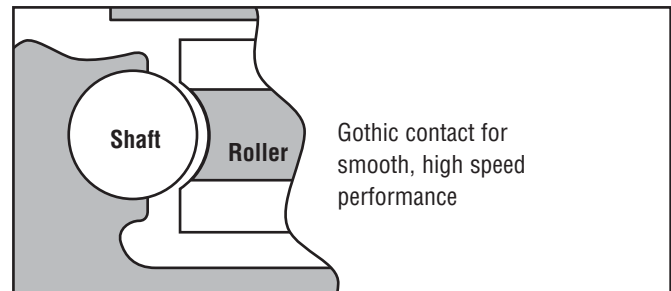

### APPLICATIONS

- Automation
- Material Handling
- Assembly
- Packaging

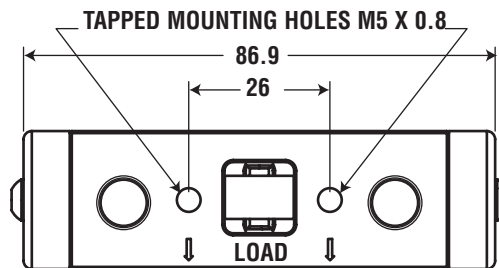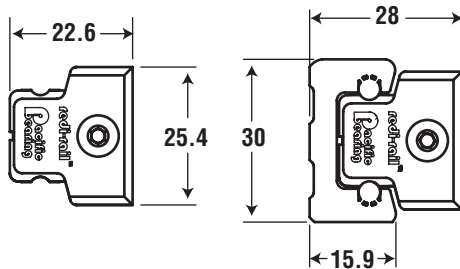

NOTE: Slide weight .09 Kg

### ORDER INFORMATION

<b>RRS</b>	<b>30</b>	<b>U</b>	
Redi-Rail Slide		Wiper Options	
Nominal Size		No Entry - Oil filled plastic (Standard)	
30 = Dimension		U = UHMW	
45 = Dimension (page 208)			
65 = Dimension (page 210)			

**EXAMPLE: RRS30U**  
Slide size 30 with UHMW seals

**NOTES:** Felt wipers have been replaced by low friction oil impregnated plastic wipers.  
No entry in the part # results in use of oil impregnated wiper.




## RR30 RAIL

- Rail is aluminum alloy with hardened and ground steel raceways inserted.
- Custom solutions can be designed, engineered, and manufactured to meet your specific requirements.
- Maximum lengths up to 5800mm are available.
- Patented preload adjustment
- Joinable for even longer runs.
- Cut-to-length



## LIFE CALCULATIONS




Cd = Dynamic capacity (LC)  
 Cr = Radial capacity  
 Ca = Axial capacity  
 Mx, My, Mz = Moment capacities


### Conversions

newton (N) x 0.2248 = lbs.  
 (lbf) meter x 0.0397 = inch  
 newton - meter (Nm) x 8.851 = in.-lbs.

PART NUMBER	Cd (N)	Cr (N)	Ca (N)	Mx (Nm)	My (Nm)	Mz (Nm)
RRS30	1,440	1,000	330	1.8	5.5	12.5

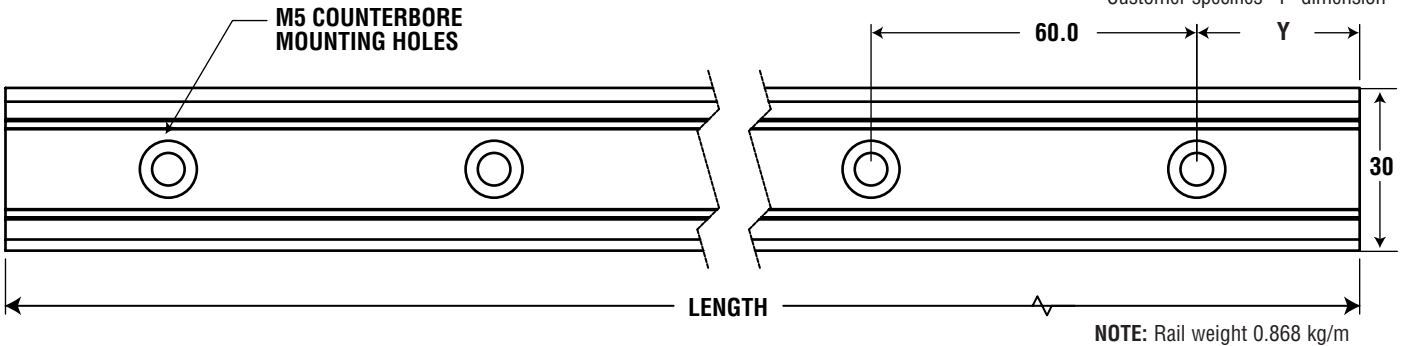

## ORDER INFORMATION

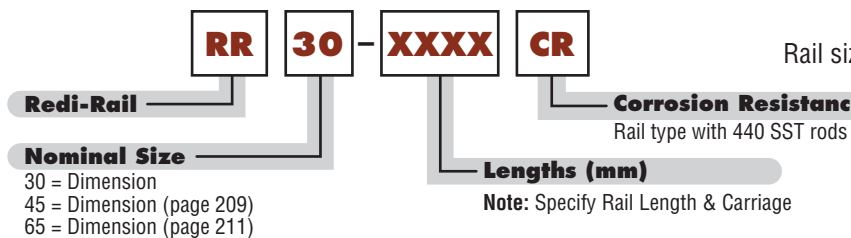

**EXAMPLE:** RR30-1200  
 Rail size 30 cut to 1200mm long




# RRS45 Slide


## Redi-Rail® Linear Guides

### RRS45 SLIDE

- 5.79 Meter Lengths
- Sealed Bearings
- Integral Seals
- Easy Adjusting
- Gothic Arch Rollers
- Solid Roller Mounting
- Slider body is aluminum alloy.
- Maximum temperature approximately 80°C.
- Gothic rollers are 52100 steel, hardened and ground, lubricated for life and sealed against contamination.
- Oil-filled plastic or UHMW spring loaded seals keep contamination clear of the rollers.
- Custom roller configurations can be designed, engineered, and manufactured to meet your specific requirements.
- Patented pre-load adjustment eliminates eccentrics.





### ROLLER/SHAFT INTERFACE

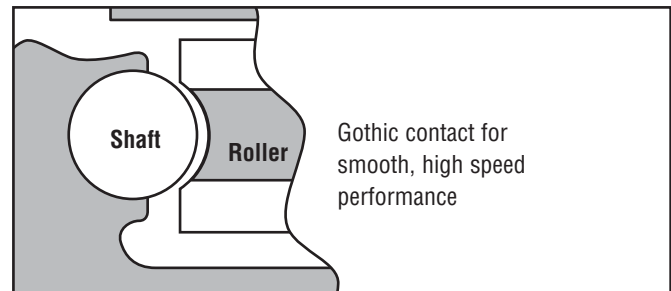


### APPLICATIONS

- Automation
- Material Handling
- Assembly
- Packaging

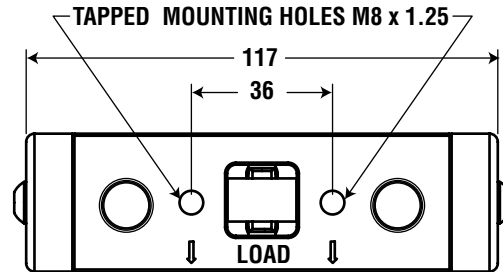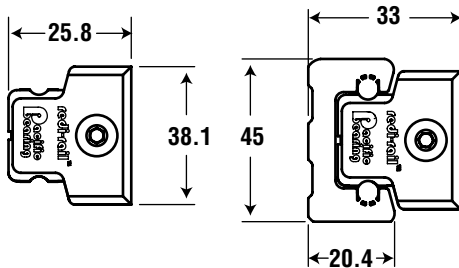

NOTE: Slide weight .23 Kg

### ORDER INFORMATION

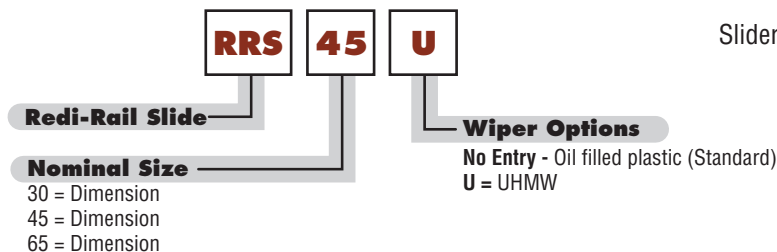

**EXAMPLE: RRS45U**  
Slider size 45 with UHMW seals

**NOTES:** Felt wipers have been replaced by low friction oil impregnated plastic wipers.  
No entry in the part # results in use of oil impregnated wiper.




## RR45 RAIL

- Rail is aluminum alloy with hardened and ground steel raceways inserted.
- Custom solutions can be designed, engineered, and manufactured to meet your specific requirements.
- Maximum lengths up to 5800mm are available.
- Patented preload adjustment
- Joinable for even longer runs.
- Cut-to-length



## LIFE CALCULATIONS




Cd = Dynamic capacity (LC)  
 Cr = Radial capacity  
 Ca = Axial capacity  
 Mx, My, Mz = Moment capacities

### Conversions


newton (N) x 0.2248 = lbs.  
 (lbf) meter x 0.0397 = inch  
 newton - meter (Nm) x 8.851 = in.-lbs.

PART NUMBER	Cd (N)	Cr (N)	Ca (N)	Mx (Nm)	My (Nm)	Mz (Nm)
RRS45	4404	2660	827	6.6	19.9	47.9

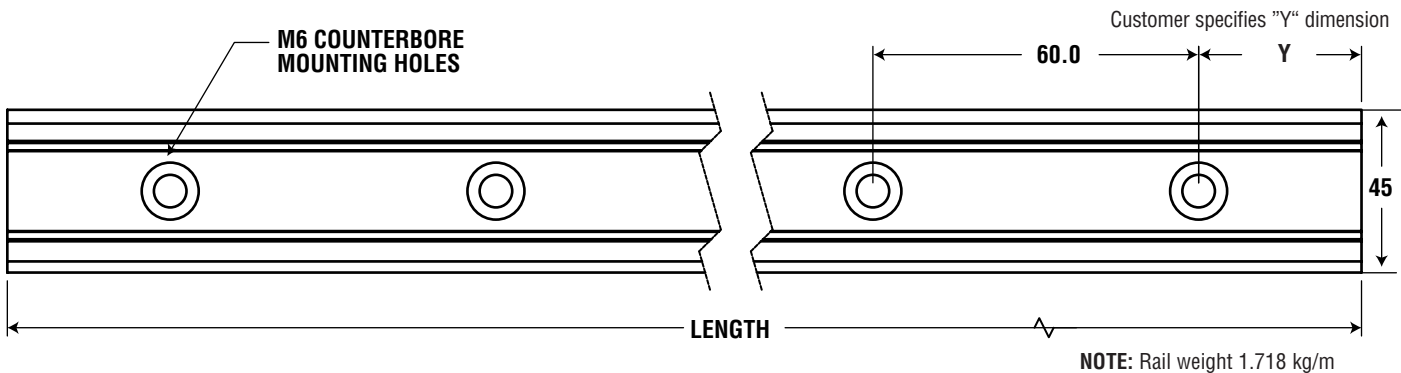

Redi-Rail® RR45

## ORDER INFORMATION

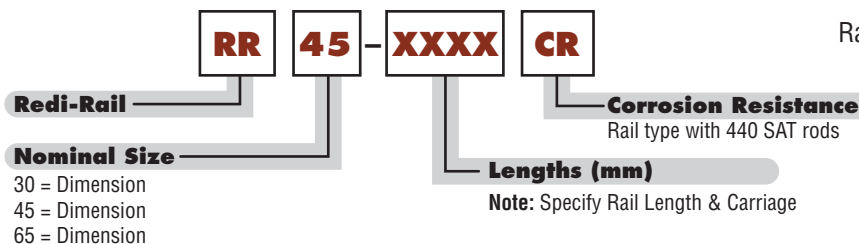

**EXAMPLE:** RR45-1200  
 Rail size 45 cut to 1200mm long




# RRS65 Slide


## Redi-Rail® Linear Guides

### RRS65 SLIDE

- 5.79 Meter Lengths
- Sealed Bearings
- Integral Seals
- Easy Adjusting
- Gothic Arch Rollers
- Solid Roller Mounting
- Slider body is aluminum alloy.
- Maximum temperature approximately 80°C.
- Gothic rollers are 52100 steel, hardened and ground, lubricated for life and sealed against contamination.
- Oil-filled plastic or UHMW spring loaded seals keep contamination clear of the rollers.
- Custom roller configurations can be designed, engineered, and manufactured to meet your specific requirements.
- Patented pre-load adjustment eliminates eccentrics.




### ROLLER/SHAFT INTERFACE

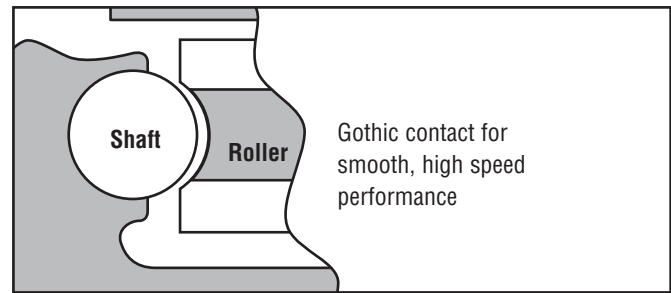


### APPLICATIONS

- Automation
- Material Handling
- Assembly
- Packaging

Redi-Rail® RRS65

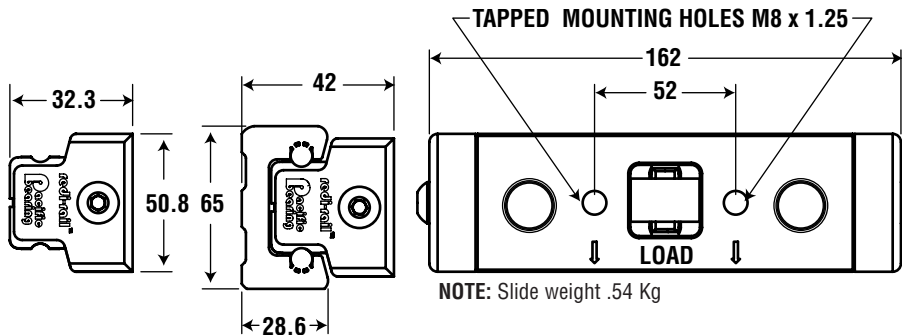

### ORDER INFORMATION

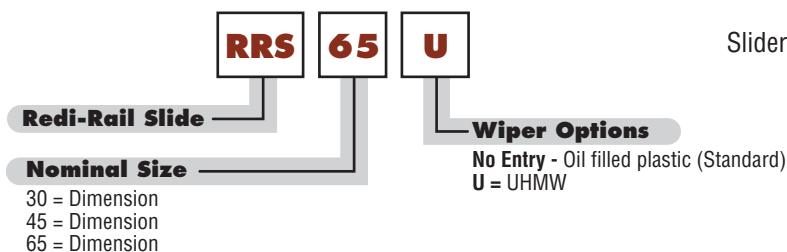

**EXAMPLE: RRS65U**  
Slider size 65 with UHMW seals

**NOTES:** Felt wipers have been replaced by low friction oil impregnated plastic wipers.  
No entry in the part # results in use of oil impregnated wiper.






## RR65 RAIL

- Rail is aluminum alloy with hardened and ground steel raceways inserted.
- Custom solutions can be designed, engineered, and manufactured to meet your specific requirements.
- Maximum lengths up to 5800mm are available.
- Patented preload adjustment
- Joinable for even longer runs.
- Cut-to-length



## LIFE CALCULATIONS




Cd = Dynamic capacity (LC)  
 Cr = Radial capacity  
 Ca = Axial capacity  
 Mx, My, Mz = Moment capacities

### Conversions


newton (N) x 0.2248 = lbs.  
 (lbf) meter x 0.0397 = inch  
 newton - meter (Nm) x 8.851 = in.-lbs.

PART NUMBER	Cd (N)	Cr (N)	Ca (N)	Mx (Nm)	My (Nm)	Mz (Nm)
RRS65	10200	5950	1678	19.0	58.2	154.7

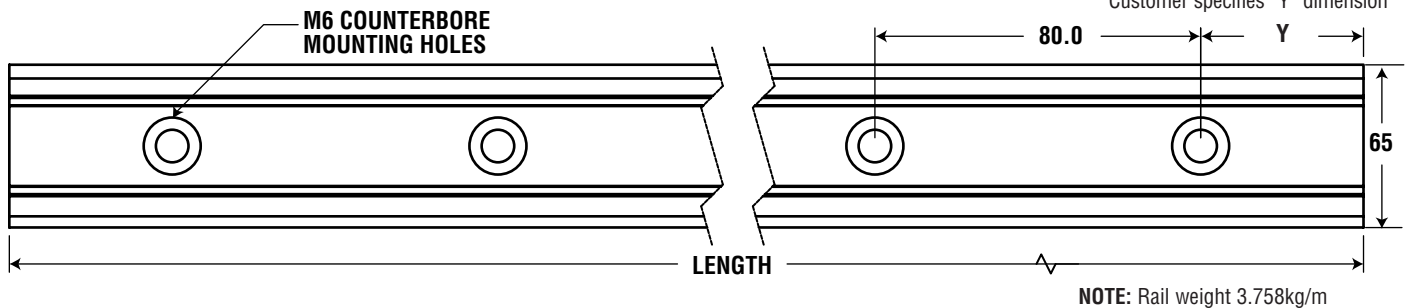

Redi-Rail® RR65


## ORDER INFORMATION

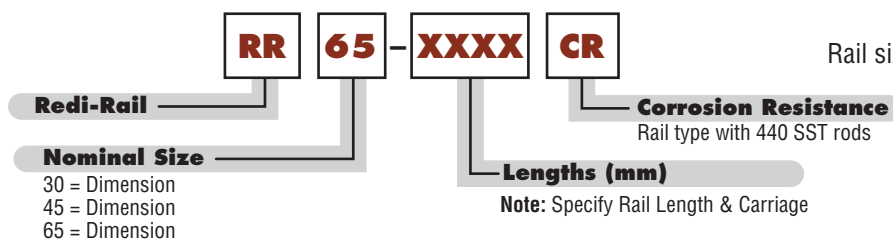

**EXAMPLE:** RR65-1200  
 Rail size 65 cut to 1200mm long

# Design & Layout Options

Name: _____	Date: _____
Dept.: _____	Phone: _____ Fax: _____
Company: _____	Machine Type/Name: _____
Email: _____	
Address: _____	
_____	

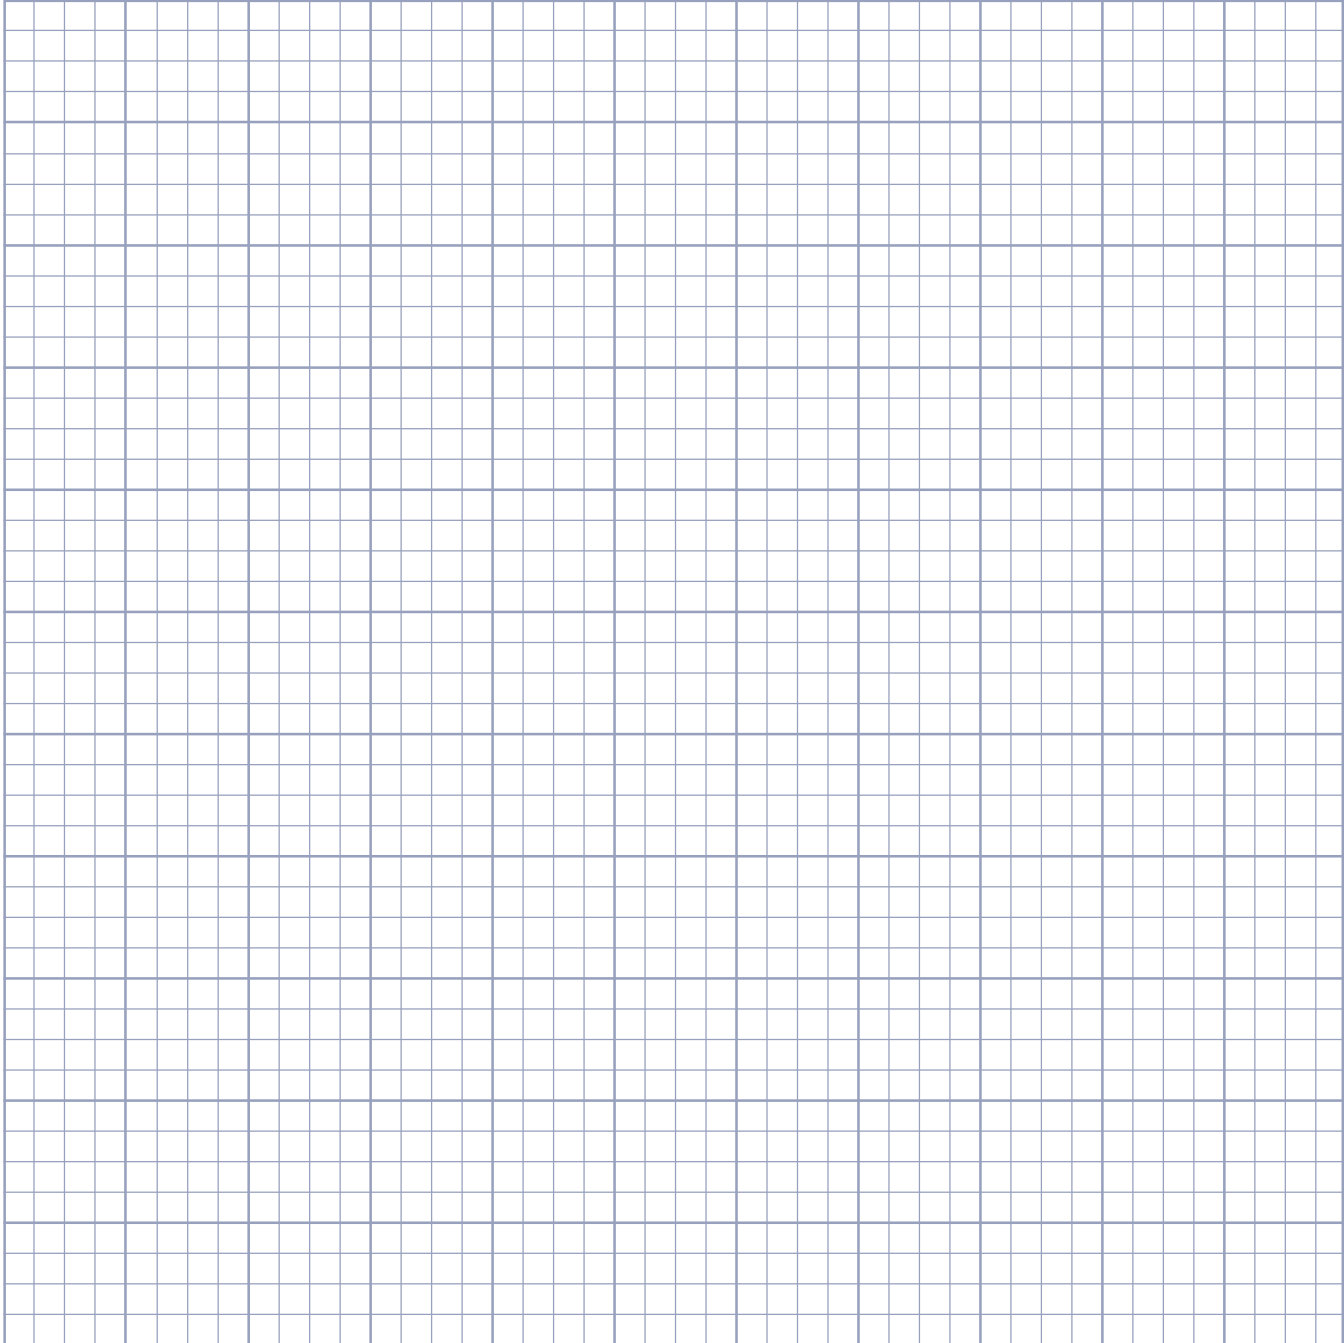



## PRODUCT OVERVIEW

V-Guide System components provide an excellent alternative for linear motion applications in harsh environments with medium accuracy requirements, and high speed capabilities.

## FEATURES & BENEFITS

V-Guide systems are an industry standard for linear motion, and offer features that make them an ideal solution for a wide range of motion control applications.

### V-Guide Rail:

- Has shoulder for simple mounting and alignment
- Available in long lengths
- Induction hardened way surface
- 1045 Carbon Steel or 400 Series Stainless Steel
- Optional black oxide finish
- Choose predrilled rail from stock, or custom cut and drilled to your specification

### V-Guide Wheels:

- Four (4) sizes
- Permanently lubricated
- Precision dual row bearing construction
- Available in 52100 Bearing Steel or 420 Stainless Steel construction
- 304 Stainless Steel shields, or nitrile rubber seals

### Wheel Bushings:

- 303 Stainless Steel
- Inch or metric hardware
- Adjustable bushings allow adjustable fit and preload
- Fixed bushings are used in the primary radial load direction
- Stainless Steel construction

## APPLICATIONS

- Machine tool doors
- Vending machines
- Woodworking machinery
- Carpet and textile machinery
- Laboratory automation
- Paper converting equipment
- Packaging machinery



## TECHNICAL SPECIFICATIONS

### V-Guide Wheels:

V-Guide Wheels are precision ground dual row angular contact ball bearings with hardened outer way surfaces that provide low friction guidance for linear motion applications. V-Guide wheels can be used with internal or external 90-degree ways, or used with round shafts.

### V-Guide Rails:

The rail V-Ways are induction or flame hardened, ground and polished. The track body is left soft for easy drilling of mounting holes. Available in (4) four sizes, which are designed for the corresponding size wheels.

### Wheel Bushings:

Bushings allow for the wheels to be mounted with the appropriate fastener for the specific application.

**Working Temperature Rating:**  $\approx 180^{\circ}\text{F}$




# V-Guide System - 20 mm (3/4")

Radial Loads to 283 lbs. (1,260 N) per Wheel

## V-GUIDE WHEELS

VW1	Shielded Bearing
VWS1	Sealed Bearing
VWSS1	Sealed Stainless Bearing

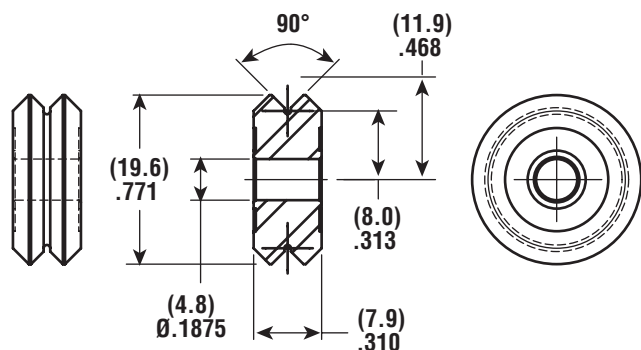

WEIGHT: .42 oz. (12 g)

Rated for:


Radial loads to 283 lbs. (1,260 N) per wheel

Axial loads to 67 lbs. (297 N) per wheel

## V-GUIDE RAIL


Carbon Steel	
VR1-xxx	undrilled rail max. length 21' (6400 mm)
VRD1-xxx	drilled rail, see table
Stainless Steel	
VRS1-xxx	undrilled rail, max. length 21' (6400 mm)
VRSD1-xxx	drilled rail, see table

NOTE: Non-heat treated rails available in all sizes, contact factory.



## WHEEL BUSHINGS

VB1	Fixed Bushing
VBA1	Adjustable Bushing


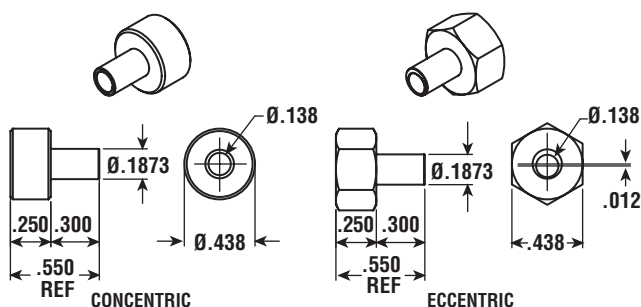


## STANDARD DRILLED RAILS

PART NUMBER	LENGTH	NO. OF HOLES
CARBON STEEL		
VRD1-1250	12.5" (317.5 mm)	7
VRD1-2450	24.5" (622.3 mm)	13
VRD1-3650	36.5" (927.1 mm)	19
VRD1-4850	48.5" (1231.9 mm)	25
VRD1-6050	60.5" (1536.7 mm)	31
VRD1-7250	72.5" (1841.5 mm)	37
STAINLESS STEEL		
VRSD1-1250	12.5" (317.5 mm)	7
VRSD1-2450	24.5" (622.3 mm)	13
VRSD1-3650	36.5" (927.1 mm)	19
VRSD1-4850	48.5" (1231.9 mm)	25
VRSD1-6050	60.5" (1536.7 mm)	31
VRSD1-7250	72.5" (1841.5 mm)	37

## METRIC WHEEL BUSHINGS

MVB1	Metric Fixed Bushing
MVBA1	Metric Adjustable Bushing

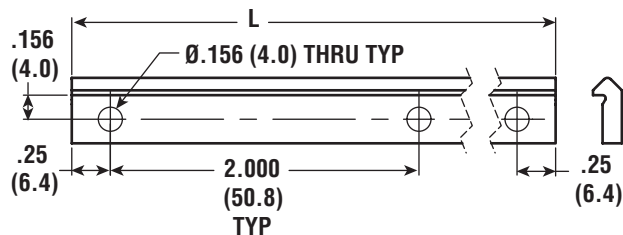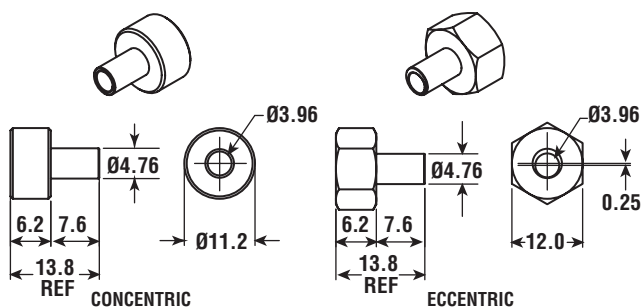

V-Guide - 20 mm (3/4")


# V-Guide System - 30 mm (1-1/4")

Radial Loads to 614 lbs. (2,730 N) per Wheel



## V-GUIDE WHEELS

VW2	Shielded Bearing
VWS2	Sealed Bearing
VWSS2	Sealed Stainless Bearing

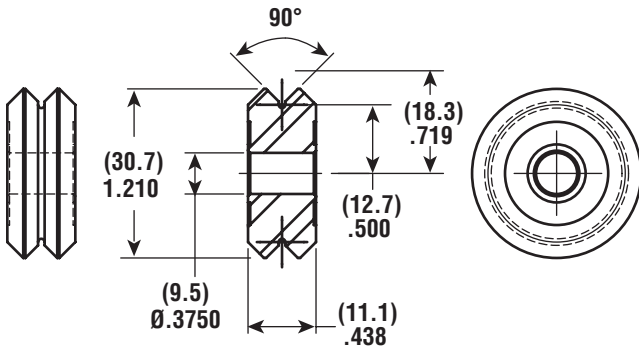

WEIGHT: 1.3 oz. (38 g)

Rated for:


Radial loads to 614 lbs. (2,730 N) per wheel

Axial loads to 142 lbs. (632 N) per wheel

## V-GUIDE RAIL


Carbon Steel	
VR2-xxx	undrilled rail max. length 21' (6400 mm)
VRD2-xxx	drilled rail, see table
Stainless Steel	
VRSD2-xxx	undrilled rail, max. length 21' (6400 mm)
VRSD2-xxx	drilled rail, see table

NOTE: Non-heat treated rails available in all sizes, contact factory.




## WHEEL BUSHINGS

VB2	Fixed Bushing
VBA2	Adjustable Bushing

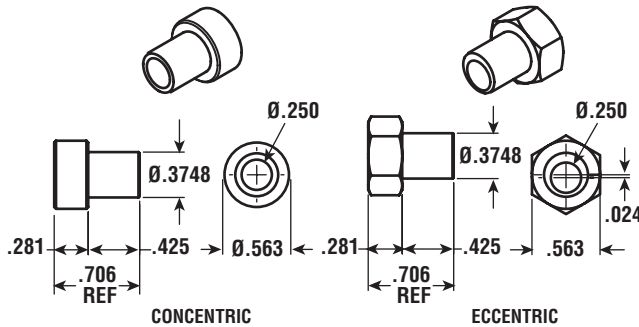


## METRIC WHEEL BUSHINGS

MVB2	Metric Fixed Bushing
MVBA2	Metric Adjustable Bushing

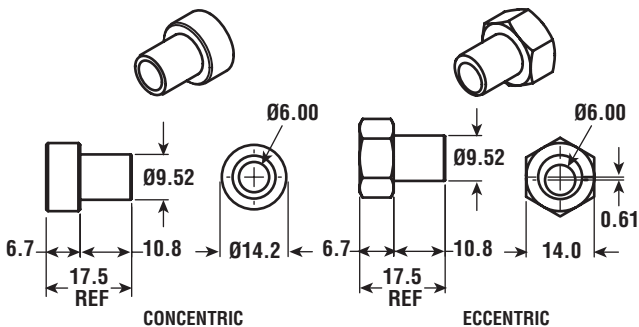

## STANDARD DRILLED RAILS

PART NUMBER	LENGTH	# OF HOLES
Carbon Steel		
VRD2-1263	12.63" (320.8 mm)	5
VRD2-2463	24.63" (625.6 mm)	9
VRD2-3663	36.63" (930.4 mm)	13
VRD2-4863	48.63" (1235.2 mm)	17
VRD2-6063	60.63" (1540 mm)	21
VRD2-7263	72.63" (1844.8 mm)	25
Stainless Steel		
VRSD2-1263	12.63" (320.8 mm)	5
VRSD2-2463	24.63" (625.6 mm)	9
VRSD2-3663	36.63" (930.4 mm)	13
VRSD2-4863	48.63" (1235.2 mm)	17
VRSD2-6063	60.63" (1540 mm)	21
VRSD2-7263	72.63" (1844.8 mm)	25

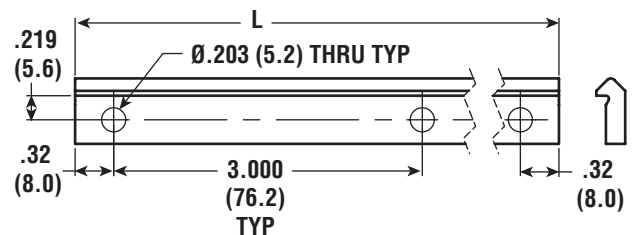

V-Guide - 30 mm (1-1/4")




# V-Guide System - 45 mm (1-3/4")

Radial Loads to 1,386 lbs. (6,166 N) per Wheel

## V-GUIDE WHEELS

VW3	Shielded Bearing
VWS3	Sealed Bearing
VWSS3	Sealed Stainless Bearing

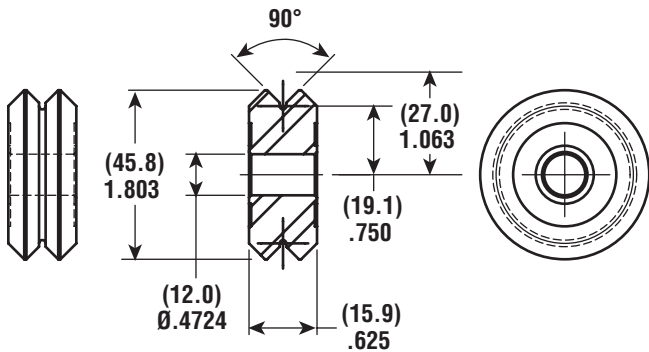

WEIGHT: 4.6 oz. (131 g)

Rated for:


Radial loads to 1,386 lbs. (6,166 N) per wheel

Axial loads to 326 lbs. (1,448 N) per wheel

## V-GUIDE RAIL


Carbon Steel	
VR3-xxx	undrilled rail max. length 21' (6400 mm)
VRD3-xxx	drilled rail, see table
Stainless Steel	
VRS3-xxx	undrilled rail, max. length 21' (6400 mm)
VRSD3-xxx	drilled rail, see table

NOTE: Non-heat treated rails available in all all sizes, contact factory.




## WHEEL BUSHINGS

VB3	Fixed Bushing
VBA3	Adjustable Bushing

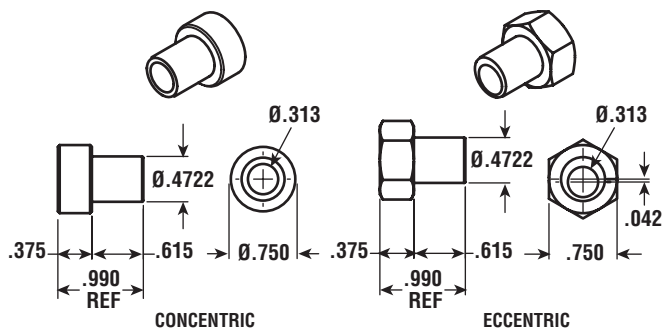


## METRIC WHEEL BUSHINGS

MVB3	Metric Fixed Bushing
MVBA3	Metric Adjustable Bushing

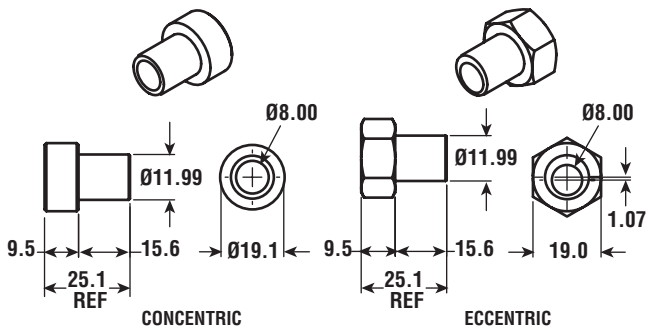

## STANDARD DRILLED RAILS

PART NUMBER	LENGTH	# OF HOLES
CARBON STEEL		
VRD3-1275	12.75" (323.9 mm)	5
VRD3-2475	24.75" (628.7 mm)	9
VRD3-3675	36.75" (933.5 mm)	13
VRD3-4875	48.75" (1238.3 mm)	17
VRD3-6075	60.75" (1543.1 mm)	21
VRD3-7275	72.75" (1847.9 mm)	25
STAINLESS STEEL		
VRSD3-1275	12.75" (323.9 mm)	5
VRSD3-2475	24.75" (628.7 mm)	9
VRSD3-3675	36.75" (933.5 mm)	13
VRSD3-4875	48.75" (1238.3 mm)	17
VRSD3-6075	60.75" (1543.1 mm)	21
VRSD3-7275	72.75" (1847.9 mm)	25

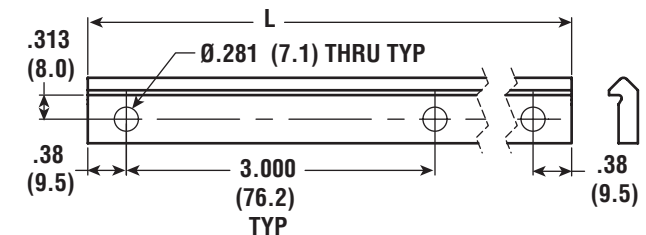


# V-Guide System - 60 mm (2-1/4")

Radial Loads to 2,246 lbs. (9,991 N) per Wheel



## V-GUIDE WHEELS


VW4	Shielded Bearing
VWS4	Sealed Bearing
VWSS4	Sealed Stainless Bearing

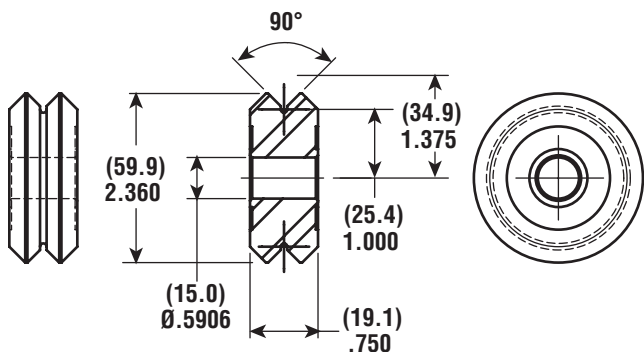

WEIGHT: 10 oz. (281 g)


## WHEEL BUSHINGS

VB4	Fixed Bushing
VBA4	Adjustable Bushing

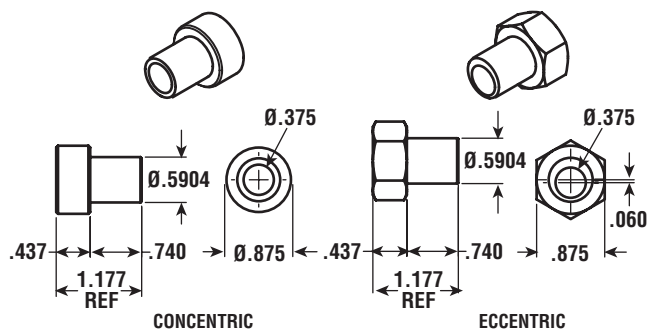

## METRIC WHEEL BUSHINGS

MVB4	Metric Fixed Bushing
MVBA4	Metric Adjustable Bushing

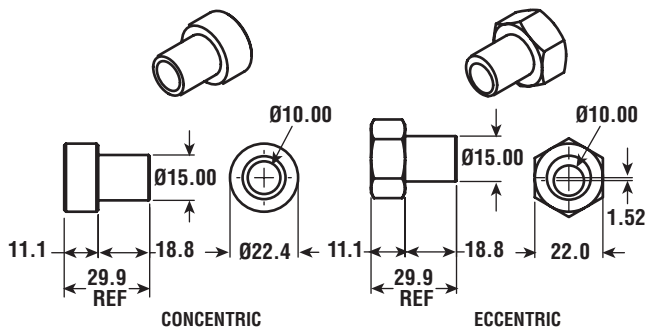

Rated for:


Radial loads to 2,246 lbs. (9,991 N) per wheel

Axial loads to 520 lbs. (2,313 N) per wheel

## V-GUIDE RAIL


Carbon Steel	
VR4-xxx	undrilled rail max. length 21' (6400 mm)
VRD4-xxx	drilled rail, see table
Stainless Steel	
VRS4-xxx	undrilled rail, max. length 21' (6400 mm)
VRSD4-xxx	drilled rail, see table

NOTE: Non-heat treated rails available in all sizes, contact factory.



## STANDARD DRILLED RAILS

PART NUMBER	LENGTH	# OF HOLES
<b>CARBON STEEL</b>		
VRD4-1300	13.00" (330.2 mm)	4
VRD4-2500	25.00" (635 mm)	7
VRD4-3700	37.00" (939.8 mm)	10
VRD4-4900	49.00" (1244.6 mm)	13
VRD4-6100	61.00" (1549.4 mm)	16
<b>Stainless Steel</b>		
VRSD4-1300	13.00" (330.2 mm)	4
VRSD4-2500	25.00" (635 mm)	7
VRSD4-3700	37.00" (939.8 mm)	10
VRSD4-4900	49.00" (1244.6 mm)	13
VRSD4-6100	61.00" (1549.4 mm)	16

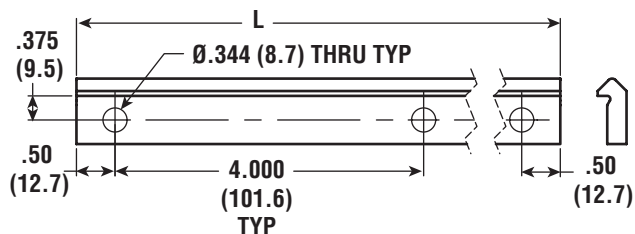

V-Guide - 60 mm (2-1/4")



# V-Guide System

## Technical Information

### LOAD CALCULATIONS

$L$  = applied load / number of wheel pairs

$L_R$  = wheel radial load

$L_0$  = wheel load from moment

$A$  = load offset dimension


$B$  = track width dimension

$F_A = .5$  for light duty, well lubricated use

$F_A = 1$  for normal lubricated use

$F_A = 2$  for dry, or harsh environments

### LOAD CONDITION A

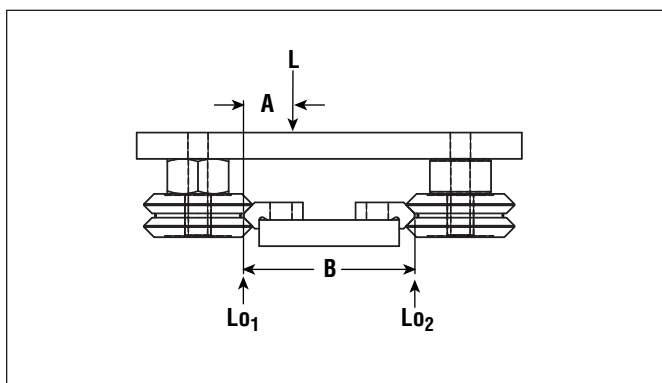

$$L_{01} = \frac{L \times (B - A)}{B} \times F_A$$

$$L_{02} = (L \times F_A) - L_{01}$$

Compare the greater of these loads to the rated moment and radial load capacities.

#### Example:

Load is 100 lbs on 4 wheel carriage,


$L = 100 / 2$  pair wheels = 50 lbs.

$A = 4"$ ,  $B = 10"$ ,  $F_A = 1$

$$L_{01} = \frac{50 \times (10 - 4)}{10} \times 1 = 30 \text{ lbs.}$$

$$L_{02} = 50 - 30 = 20 \text{ lbs.}$$

### LOAD CONDITION B

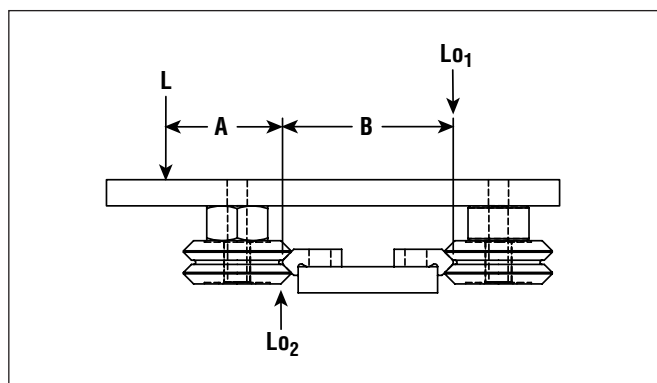

$$L_{01} = \frac{L \times A}{B} \times F_A$$

$$L_{02} = (L \times F_A) + L_{01}$$

Compare the greater of these loads to the rated moment and radial load capacities.

#### Example:

Load is 100 lbs. on 4 wheel carriage,

$L = 100 / 2$  pair wheels = 50 lbs.

$A = 4"$ ,  $B = 6"$ ,  $F_A = 1$

$$L_{01} = \frac{50 \times 4 \times 1}{6} = 33 \text{ lbs.}$$

$$L_{02} = 50 + 33 = 83 \text{ lbs.}$$

### LOAD CONDITION C

$$L_{01} = \frac{L \times A}{B} \times F_A$$

$$L_R = (L \times F_A) + L_{01}$$

$$L_{02} = L_{01}$$

Compare the greater of these loads to the rated moment and radial load capacities.

#### Example:


Load is 100 lbs. on 4 wheel carriage,

$L = 100 / 2$  pair wheels = 50 lbs.

$A = 4"$ ,  $B = 6"$ ,  $F_A = 1$

$$L_{01} = \frac{50 \times 4 \times 1}{6} = 33 \text{ lbs.}$$

$$L_R = (50 \times 1) + 33 = 83 \text{ lbs.}$$

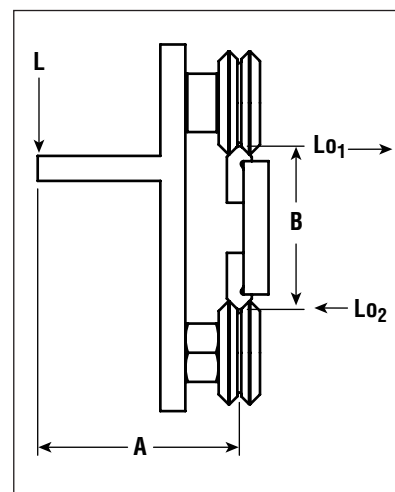





### MOUNTING AND ADJUSTMENT

Use the recommended fasteners for the specified track and wheel bushings.

Use the following table, and the center distance formulas in the next column, to configure the appropriate wheel mounting dimensions.

V-RAIL SIZE	IV (in.)	OV (in.)	IV (mm)	OV (mm)
1	0.874	0.934	22.2	23.7
2	1.374	1.436	34.9	36.5
3	2	2.124	50.8	53.9
4	2.624	2.75	66.6	69.9

The fixed bushing should be used to carry the heaviest loading. Preload the adjustable bushing so that the wheel can just be turned by hand. Over-tightening the preload will cause premature wear of the components.




### LUBRICATION

The V-Guide wheels are grease lubricated, and will not require any additional lube. The track should be lubricated for optimum performance and service life. Suggested lubricants are Mobil Vactra #2 Way Oil, or Mobil Polyrex EP 2 Extreme Pressure Grease.

### SUGGESTED FASTENERS


BUSHINGS			
INCH		METRIC	
VB1	#6	MVB1	M4
VB2	1/4"	MVB2	M6
VB3	5/16"	MVB3	M8
VB4	3/8"	MVB4	M10
V-RAIL			
VR1	#6, M3	VR3	1/4", M6
VR2	#10, M6	VR4	5/16", M8

### CENTER DISTANCE FORMULA

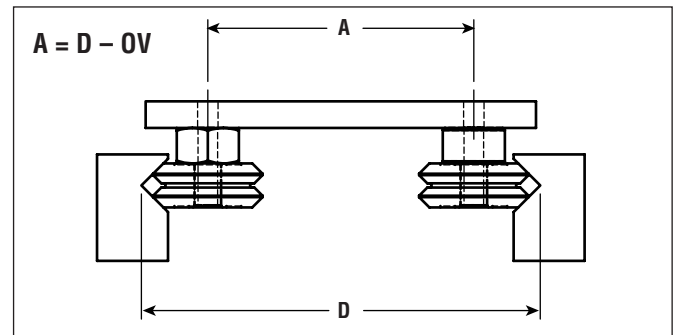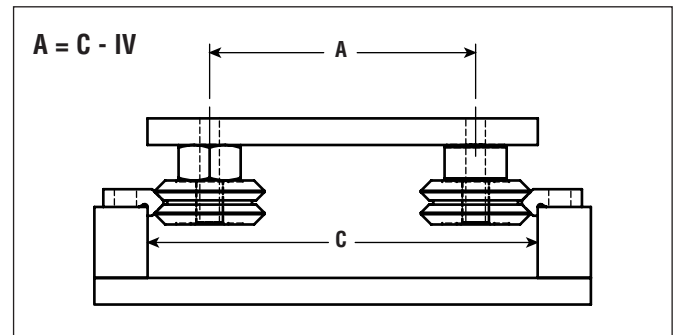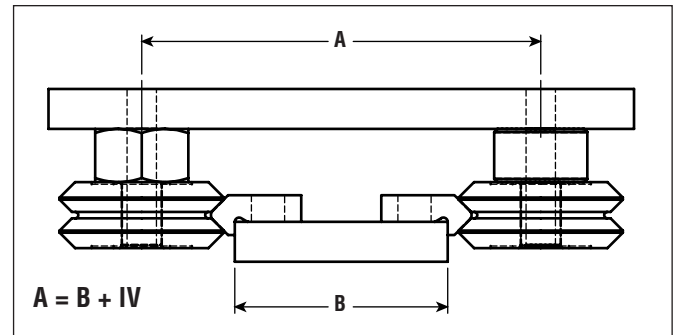

### WHEEL / BUSHING ASSEMBLY

Use SAE series N flat washers and lock washers to secure the wheel bushing assemblies.

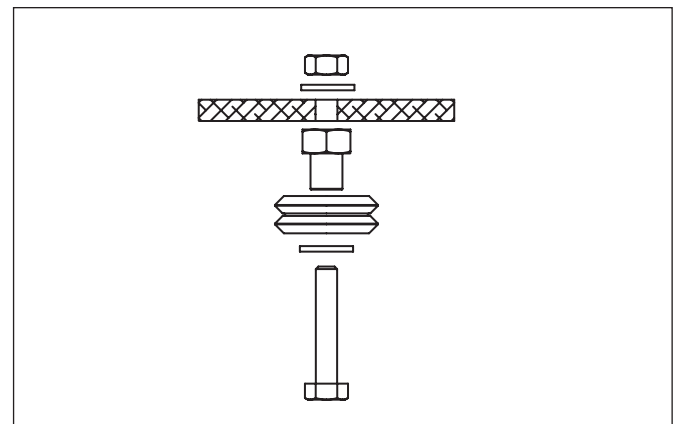



# Commercial Rail

## Product Overview

### PRODUCT OVERVIEW

Commercial Rail is a simple and cost effective linear motion solution with high load capacity and corrosion resistance.

- Roll formed rails made of steel/stainless steel sheet for low cost and corrosion resistance application
- Zinc plated rail length up to 6,000 mm
- Machined slider body made of aluminum alloy and anodized for corrosion resistance
- Steel rollers are made of 52100 chrome steel, hardened and ground, lubricated for life and sealed against contamination
- Stainless steel rollers made of 440C stainless steel for better corrosion resistance, lubricated for life and sealed against contamination
- Rollers made with thread integrated inner ring for ease of assembly and adjustment of pre-load
- Custom polymer wipers can be designed and manufactured to improve the smoothness of motion and service life
- Maximum operating temperature 100°C or 212°F
- Consult with factory for special hole spacing
- Speed up to 1.5 m/s
- Moment loads should be carried by two slides or two parallel rollers



### SLIDE ORIENTATION

The 3-roller slide should be installed in the rail so that the load is shared among the two outside rollers. The orientation marks indicate how to align the slider with the load direction

### LUBRICATION - RAILS & BEARINGS

The rollers are internally lubricated for life, but the rails must always have a layer of grease. As a guideline, reapply fresh grease every 50,000 cycles.

### PRELOAD ADJUSTMENT

- To loosen the center roller, use an Allen wrench to un-tighten the screw while holding the roller still with an open-end wrench
- Turn the center roller to a position to achieve the desired pre-load
- Move the slide along the length of the rail by hand. Adjust it so that it does not feel loose anywhere.
- Tighten the screw while holding the roller flat with an open-end wrench

PRELOAD ADJUSTMENT	CR20/CRSS20	CR30/CRSS30	CR45/CRSS45
Wrench flat sq. (mm)	6	10	14

### APPLICATIONS

- Automation
- Packaging, material handling, etc
- Environmental, energy, HVAC, etc.
- Medical
- Office equipment


### MATERIAL & FINISH SPECIFICATIONS

	CR SERIES	SS SERIES
Rail	Carbon steel sheet, Zinc plated	Stainless steel 304 sheet
Slide	Aluminum alloy anodized	Aluminum alloy anodized
Rollers	Chrome steel	Stainless steel
Hardware	Steel zinc plated	Stainless steel 18-8

RAIL MOUNT	CR20/CRSS20	CR30/CRSS30	CR45/CRSS45
Slide mount screws (Socket head cap)	M5	M6	M8
Tightening torque (lbs-in)	25	43	103
Tightening torque (N-m)	3	5	12
SLIDES	CR20/SS20	CR30/SS30	CR45/SS45
Rail mount screw (Button head cap)	M4	M6	M8




## CR20 SLIDE

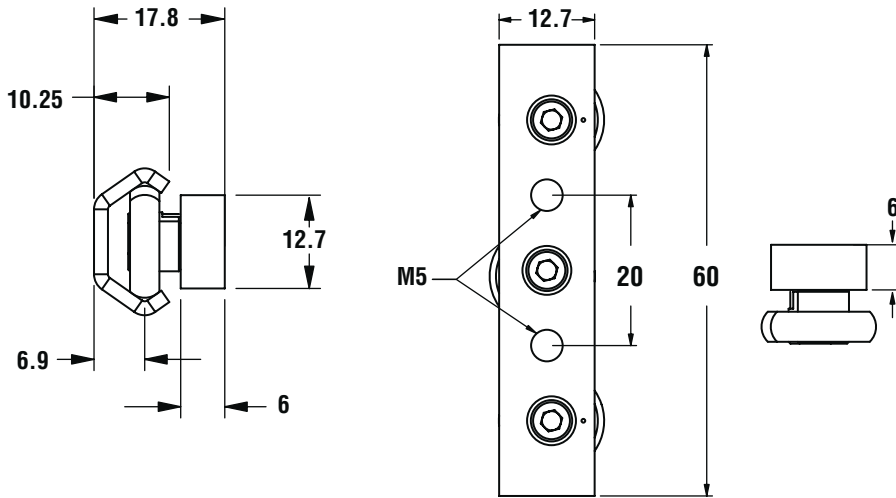

DIMENSION	LOAD RATINGS		
	STATIC RADIAL C <sub>or</sub> (N)	STATIC AXIAL C <sub>oa</sub> (N)	DYNAMIC RADIAL Cr (N)
CR20	210	160	280
CRSS20	210	160	280

CR20MCA Thread Pitch M5 x 0.8


## CR20 RAIL

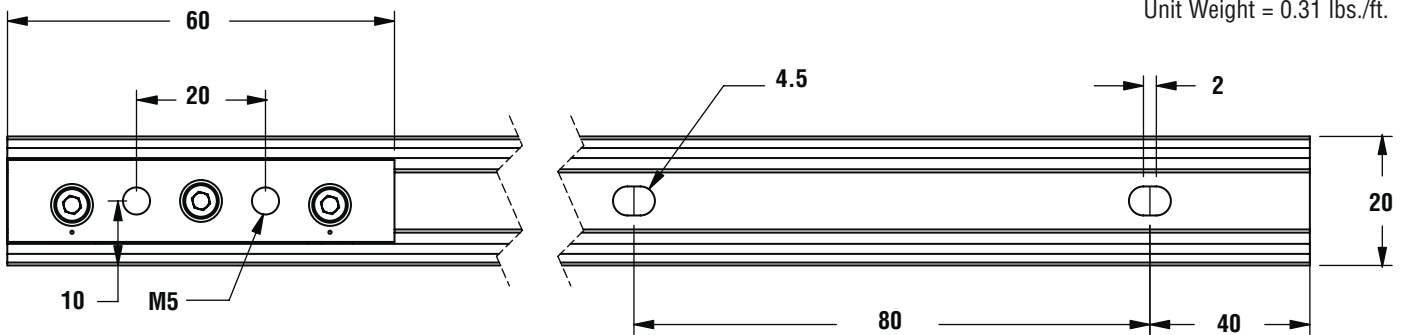

Commercial Rail - CR20

## ORDER INFORMATION

EXAMPLE: CR20MCA / CR20R-XXXX

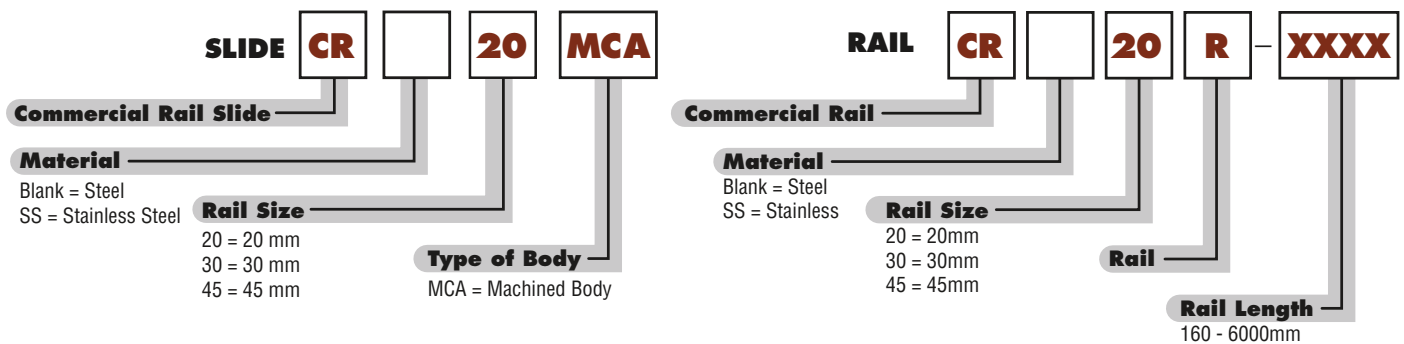




# Commercial Rail - CR30

Dynamic Radial Cr = 800 N


## CR30 SLIDE

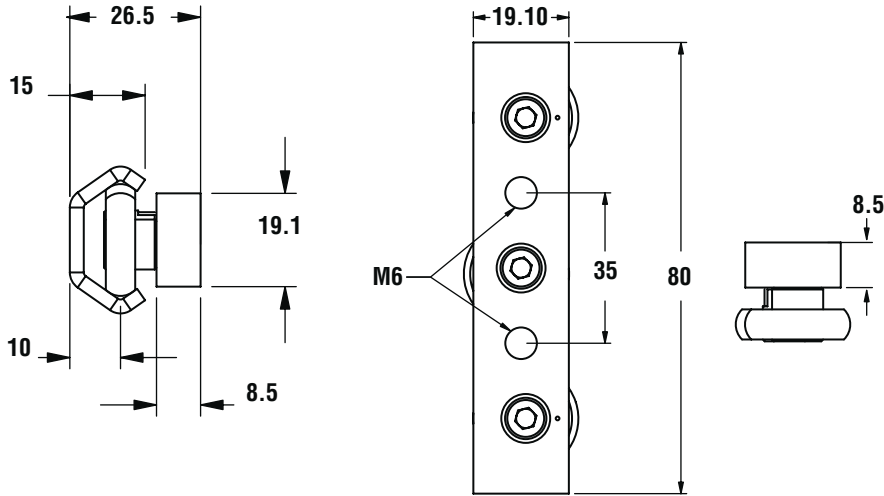

DIMENSION	LOAD RATINGS		
	STATIC RADIAL C <sub>0r</sub> (N)	STATIC AXIAL C <sub>0a</sub> (N)	DYNAMIC RADIAL Cr (N)
CR30	610	420	800
CRSS30	610	420	800

CR30MCA Thread Pitch M6 x 1.0


## CR30 RAIL

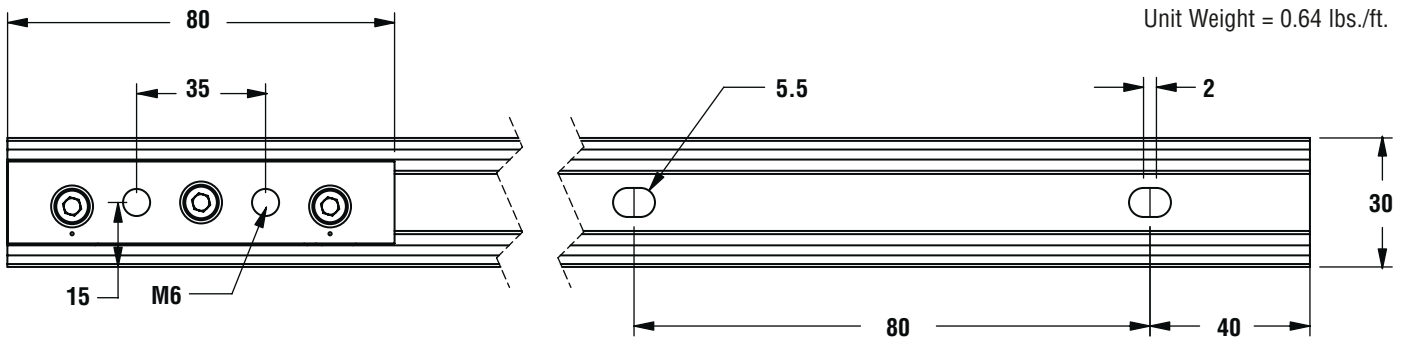

Commercial Rail - CR30


## ORDER INFORMATION

EXAMPLE: CR30MCA / CR30R-XXXX

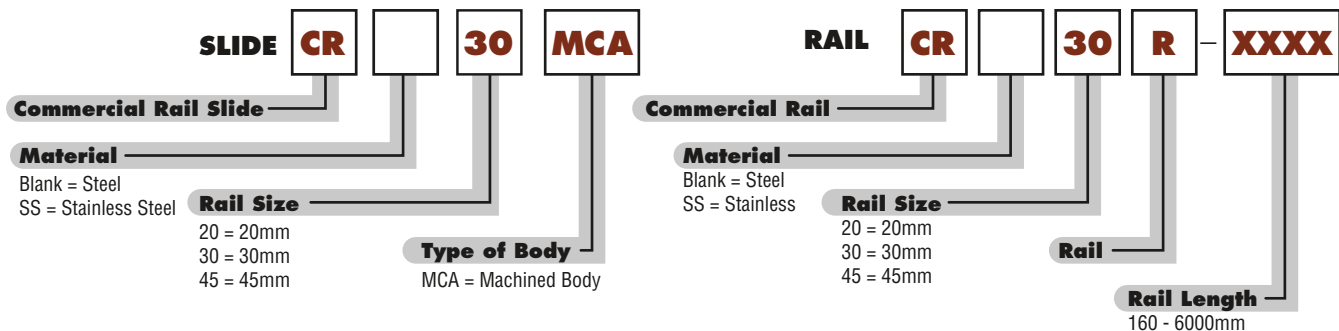




## CR45 SLIDE

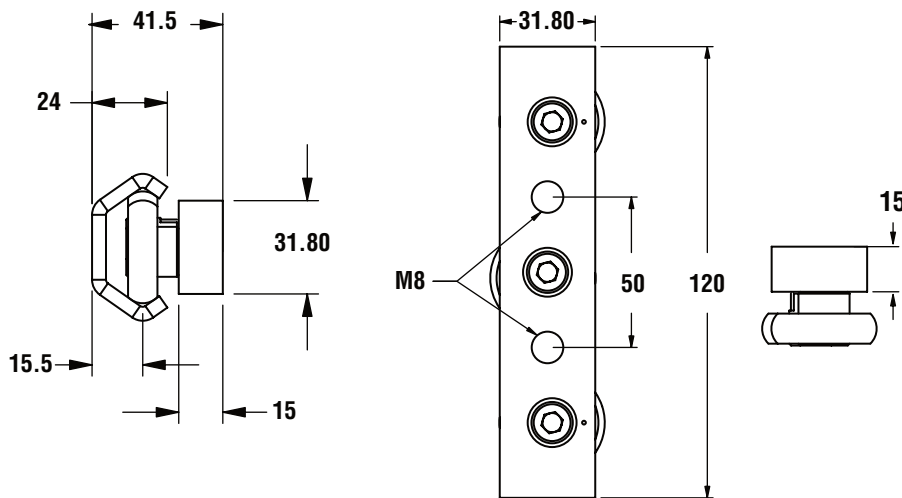

DIMENSION	LOAD RATINGS		
	STATIC RADIAL C <sub>0r</sub> (N)	STATIC AXIAL C <sub>0a</sub> (N)	DYNAMIC RADIAL Cr (N)
CR45	1330	930	1740
CRSS45	1330	930	1740

CR45MCA Thread Pitch M8 x 1.25



## CR45 RAIL

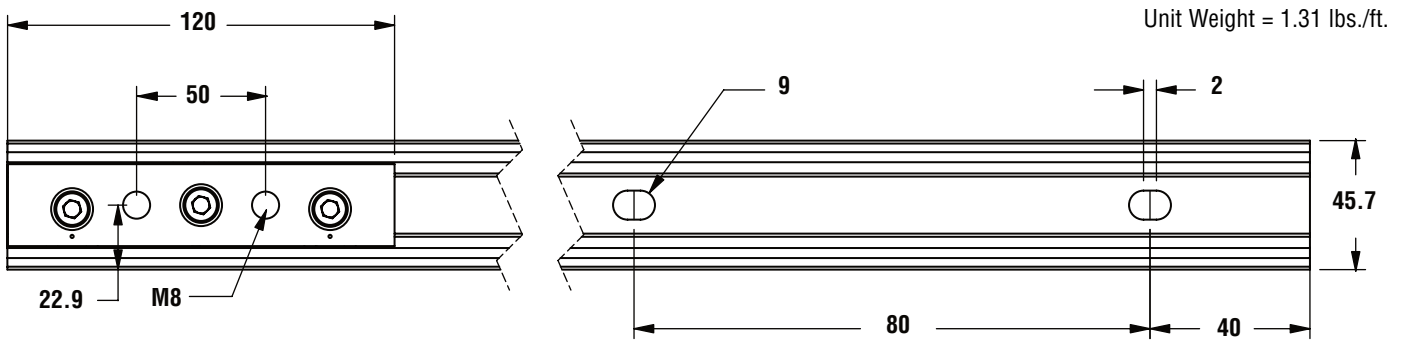

Commercial Rail - CR45

## ORDER INFORMATION

EXAMPLE: CR45MCA / CR45R-XXXX

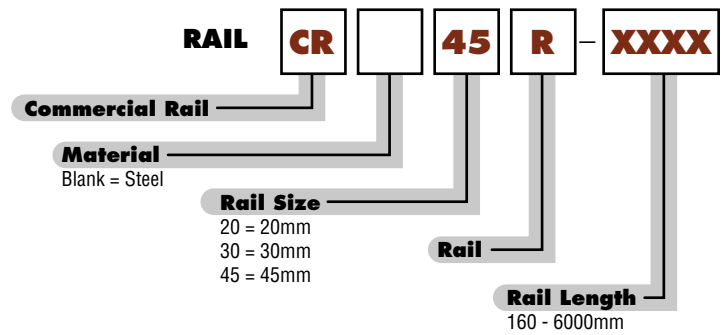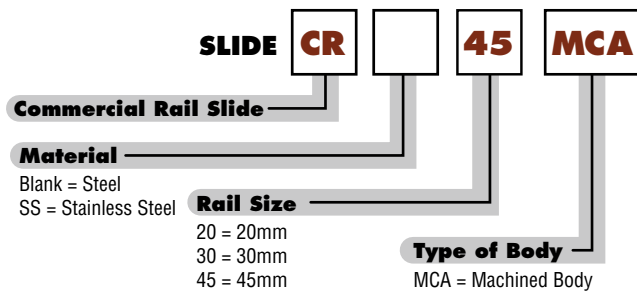



# Hardened Crown Rollers

## Inch & ISO Metric Series



### FEATURES & BENEFITS

- Low cost linear motion solution
- Precision rolling element bearing riding in a rail from Copper B-Line Series
- 9/16" Hex head for easier mounting
- Simple solution and setup for point-to-point applications
- Rollers provide self-alignment, durability and longevity
- MAX. bearing load - 300 lbs.
- MAX. bearing speed - 150 ft./ min. (30 in./sec.)
- Rails lengths available up to 10 ft.  
Contact manufacturer for longer lengths.

### RAILS FINISHES:

- Bare steel
- Powder coated


### ACCESSORIES AVAILABLE:

- Angle brackets (for welding to mounting rail)
- End stops


### ORDERING INFORMATION

PART NUMBER	DESCRIPTION
PAC3016	Hardened Crown Roller Bearing
PAC3016M	Hardened Crown Roller Bearing with metric thread
PAC2245	Rail System - unpainted (specify length - priced per foot)
PAC2247	Rail System - black powder coat finish (specify length- price per foot)
PAC2244	Angle Brackets - 1" Steel
PAC2246	End Stops for Rail System (bolt included)

### INCH

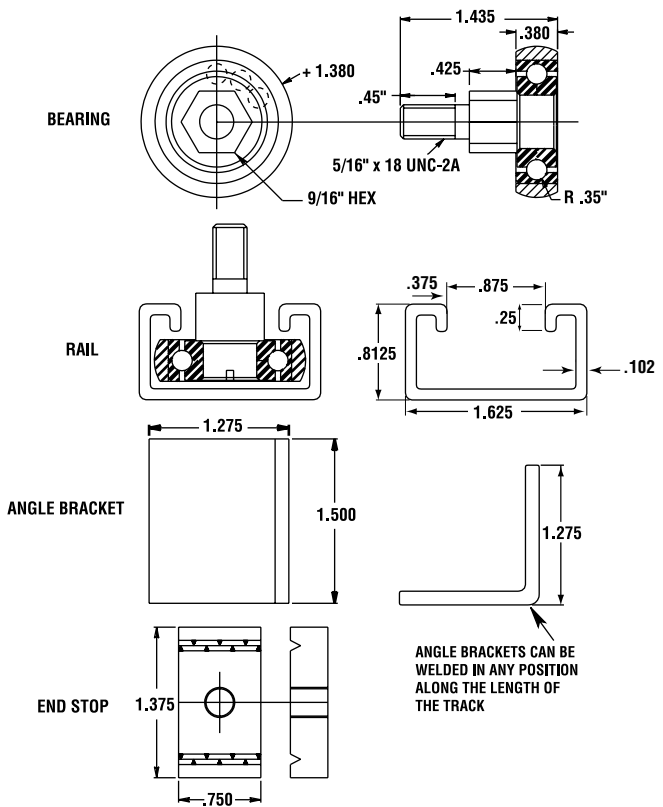

### METRIC

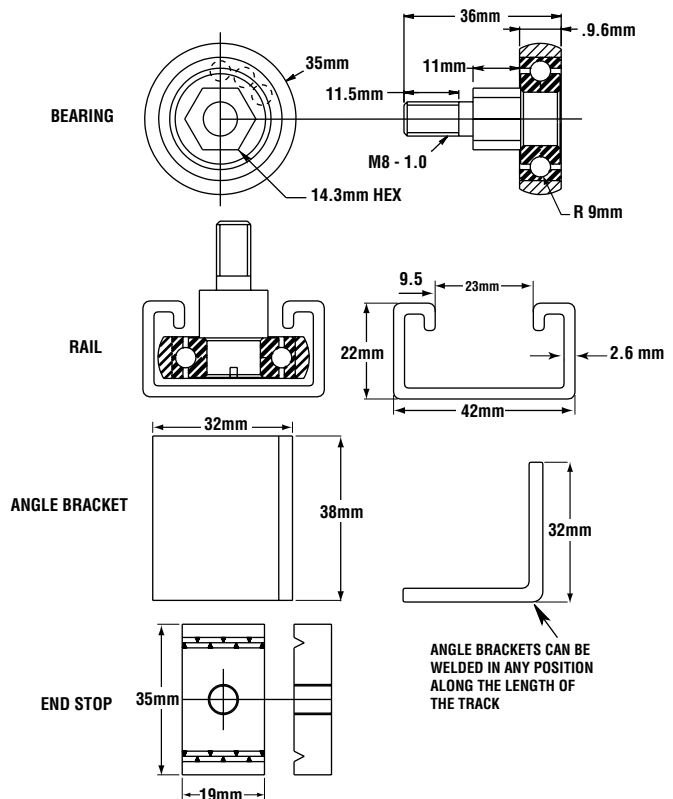

**NOTE:** All metric dimensions are conversions from inch dimensions all parts are manufactured to inch standards.



### PRODUCT OVERVIEW

The economical Hevi-Rail® guide systems offer a lifetime of durability under continuous use. The easily interchangeable bearing components provide even dispersion of forces in the profile rails for longer system life and stability.

#### Linear Bearings:

- Outer ring made of case-hardened steel
- Handles very high axial and radial loads
- Easily interchangeable components for less down-time

#### Profile Rails:

- Standard length up to 6 meters
- Sand blasted or lightly oiled
- U-channel or I-channel available

#### Flange Plates:

- Simple mounting for bearings
- Can be ordered pre-welded to bearing

**Ordering example:** HVB-054/HVPO

#### Clamp Flanges:


- Adjustable
- Eliminates need for welding and straightening
- Easily adjustable parallelism



**Hevi-Rail®**  
Heavy Duty Bearing Systems

### APPLICATIONS

- Telescoping applications (ex. overhead extending jib crane)
- Warehouse handling systems / other material handling
- Custom and standard lift units
- Large Shrink-wrap machinery
- Steel and coil handling
- Large variety of material handling

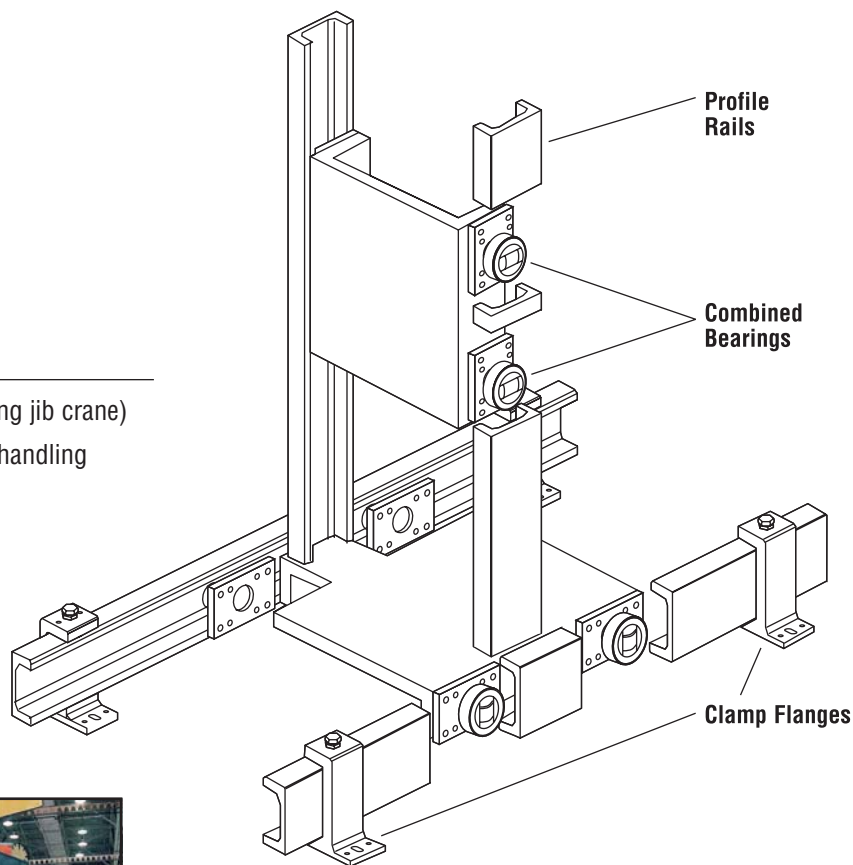



# Hevi-Rail® Linear Bearing Systems

## Technical Information & Selection Guide

### TECHNICAL SPECIFICATIONS

#### Linear Bearing for Axial & Radial Loads

Prior to welding, disassemble bearing components. To avoid cracks in welded joints, please use welding electrodes and core weld for unalloyed steel.

#### Materials:

**Outer ring** - Case-hardened steel UNI 20 MnCr 5 hardened at 60+2 HRc

**Inner ring** - Hardened steel En 31 - SAE 52100 hardened at 62-2 HRc

**Cylindrical rollers** - Flat ground heads are hardened steel, En 31 - SAE 52100, hardened at 59-64 HRC

**Bolt tolerance** = 0.05 mm

**Profile Rails:** High quality steel, ASTM A 252 Gr.1, A 252 Gr.2, A 252 Gr.3, A 663 Gr.45-80, A 675 Gr. 45-90. Standard length (1024/1524 steel) of 6 m (19.7ft.). MnCr 5 with maximum contact pressure of 750 MPa (N/mm<sup>2</sup>). Optional sand blasted and/or lightly oiled. Rails are not hardened but have a Brinell hardness of 145-185. The guide ways in the rails should be lightly greased and not painted.

**Clamp Flange:** Low carbon steel, adjustable clamp

**Flange Plate:** Low carbon steel. Special designs available, contact manufacturer.

**Seals:** Bearings with fixed axial bearing (HVB-053 to HVB-063) - radial bearing has steel labyrinth and side guide roller with rubber seals

Bearings with eccentric adjustable axial bearing (HVBEA-454 to HVBEA-463) - Both radial and axial bearings utilize rubber seals (RS type)

**Lubrication:** Bearings are supplied lubricated with grease grade 3. Bearings from HVB-056 to HVB-063 can be re-lubricated with grease zerk. Adjustable bearings are not available with zerk.

**Temperature:** Resistant from -10°C to 80°C (14°F to 176°F)

#### Bearing Life Calculations:

$$L_{10} = \left(\frac{1666}{n}\right) \left(\frac{C}{P}\right)^{10/3} \text{ (Hours)}$$

C = Dynamic load rating (KN)


P = Automatic dynamic load (KN)

n = Revolutions per minute (rpm)

**NOTE:** Above calculation formula is for predicting life expectancy with 90% reliability level. Customers shall use their discretion to determine the reduction factor based on the actual operation needs and conditions such as reliability level, load, speed, impact and environments.


#### Adjusting Axial Bearing (HVBEA-454 to HVBEA-463)

1. Remove front screws.
2. Rotate axial bearing shaft
3. Check dimension A  
(repeat step 2, if needed)
4. Re-install front screws



### SYSTEM DESIGN CLEARANCE

1. The overall system clearance should be 1.524 mm to 3.048 mm



Inner Rail Distance =  
Saddle Width + (1.524  
mm to 3.048 mm)

2. Verify that the Axial bearing is aligned parallel to the rail; especially in vertical operations.



### CALCULATION OF FMAX FOR CANTILEVERED LOADS

Q = Load capacity (N)



L = Load distance to suspension point (mm)

P = Suspension point

A = Bearing distance (mm) recommended 500-1000 mm

$$\text{Formula: } F_{\max}[\text{N}] = \frac{Q \cdot L}{2 \cdot A}$$

$P_{\text{zul}} = 750 \text{ N/mm}^2$  for all profile rails. Indicated here are  $F_{\max}$  stat radial + axial for each bearing.

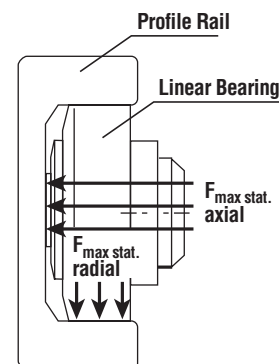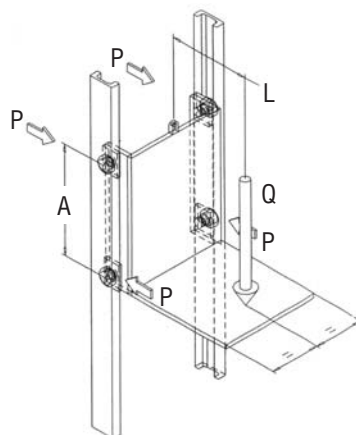






### SELECTION GUIDE (when used with Profile Rails HVR-S to HVR-6)

Use the following chart to select the bearings (fixed or adjustable), rails, flange plates and clamp flanges according to your system's maximum static radial and axial loading. A "system" is defined as a bearing in the corresponding rail. For dimensional and detailed specifications for the system selected, simply refer to the corresponding pages.

F (KN) MAX STAT RADIAL	F (KN) MAX STAT AXIAL	COMBINED BEARING AXIAL BEARING FIXED	COMBINED BEARING AXIAL BEARING ADJUSTABLE	PROFILE RAILS	CLAMP FLANGE	FLANGE PLATE	PAGE NO.
5.2	1.7	HVB-053	–	HVR-S	–	HVPS-1	246
7.2	2.4	HVB-054	HVBEA-454	HVR-0	HVC-0	HVP0-1	244
8.6	2.8	HVB-055	HVBEA-455	HVR-1, HVRI-07	HVC-1	HVP1-1	248
8.9	3.0	HVB-056	HVBEA-456	HVR-2	HVC-2	HVP2-1	249
8.9	3.0	HVB-057	HVBEA-457	HVRI-08	–	HVP2-1	250
15.6	5.2	HVB-058	HVBEA-458	HVR-3, HVRI-09	HVC-3	HVP3-1	251
15.5	5.1	HVB-059	HVBEA-459	HVRI-10	–	–	252
16.5	5.5	HVB-060	HVBEA-460	HVRI-11	–	–	252
16.5	5.5	HVB-061	HVBEA-461	HVR-4	HVC-4	HVP4-1	253
23.5	7.8	HVB-062	–	HVR-5	–	HVP4-1	254
41.1	13.7	HVB-063	HVBEA-463	HVR-6	–	HVP6-1	255

**NOTE:** For cantilevered loads, static verification calculations can be found on page 244. \*All dimensions in mm.

### MOUNTING CONFIGURATIONS

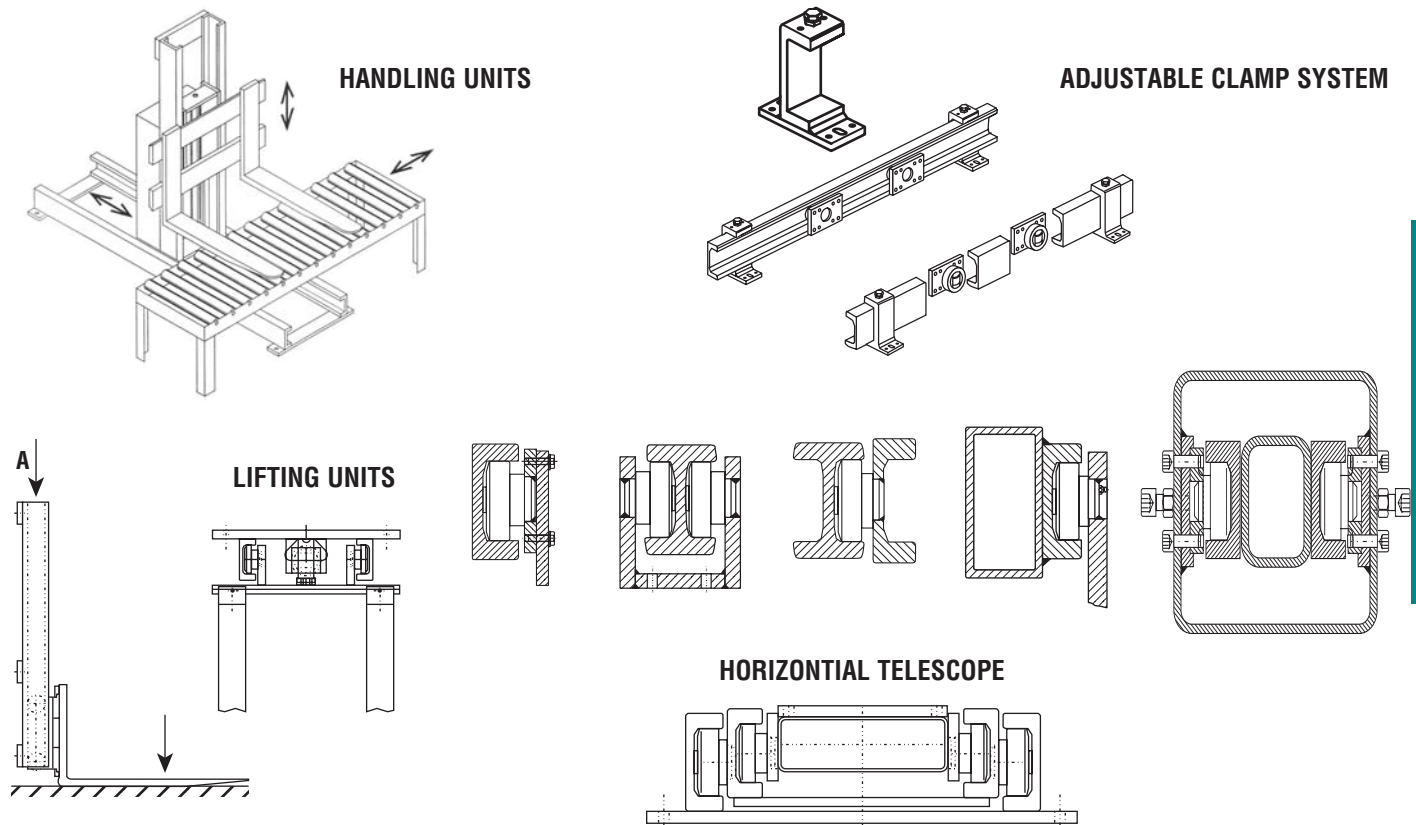

Mounting Configurations




# Hevi-Rail® Linear Bearing System

## 0.6 US Ton-Force

### AXIAL BEARING - FIXED

### HVB-053



**WEIGHT** = 0.36 Kg

**BEARING RADIAL LOAD**

Max. dynamic load = 24 KN

Max. static load = 33 KN

**BEARING AXIAL LOAD**


Max. dynamic load = 10 KN

Max. static load = 14 KN

**NOTE:** Above loads achievable when used with a hardened rail 55 RC minimum 2.54mm deep.

### PROFILE RAIL U-CHANNEL

### HVR-S

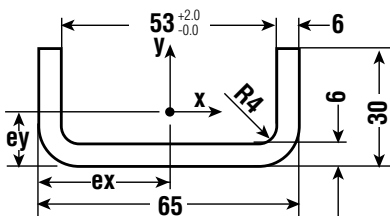

**WEIGHT** = 5.3 Kg/m

**MOMENT OF INERTIA**

$I_x = 5.2 \text{ cm}^4$ ,  $I_y = 38.8 \text{ cm}^4$

**MOMENT OF RESISTANCE**

$W_x = 2.50 \text{ cm}^3$ ,  $W_y = 11.90 \text{ cm}^3$

**RADIUS OF INERTIA**


$i_x = 0.80 \text{ cm}$ ,  $i_y = 2.40 \text{ cm}$

**DIST. TO CENTER OF GRAVITY**

$e_y = 0.94 \text{ cm}$ ,  $e_x = 32.50 \text{ cm}$

### FLANGE PLATE

### HVPS-1

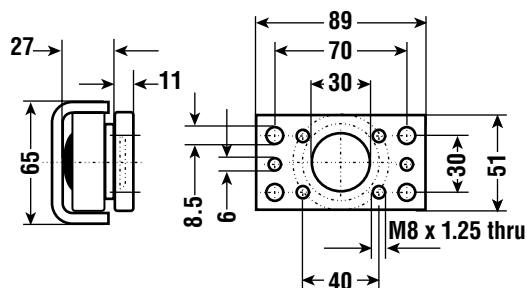

WHEN USED WITH SHOWN PROFILE RAILS


System Max. Static Radial Load = 5.2 KN / 0.6 US Ton-Force

System Max. Static Axial Load = 1.7 KN / 0.2 US Ton-Force



## AXIAL BEARING - FIXED


### HVB-054

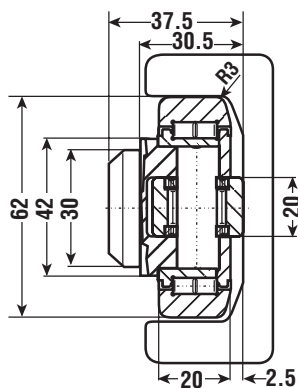

**WEIGHT** = 0.53 Kg  
**BEARING RADIAL LOAD**  
 Max. dynamic load = 39 KN  
 Max. static load = 65 KN  
**BEARING AXIAL LOAD**  
 Max. dynamic load = 15 KN  
 Max. static load = 22 KN  
**NOTE:** Above loads achievable when used with a hardened rail 55 RC minimum 2.54mm deep.

## ECCENTRIC ADJUSTABLE


### HVBEA-454

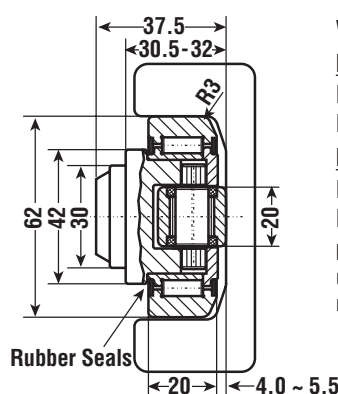

**WEIGHT** = 0.53 Kg  
**BEARING RADIAL LOAD**  
 Max. dynamic load = 39 KN  
 Max. static load = 65 KN  
**BEARING AXIAL LOAD**  
 Max. dynamic load = 16 KN  
 Max. static load = 25 KN  
**NOTE:** Above loads achievable when used with a hardened rail 55 RC minimum 2.54mm deep.

## PROFILE RAIL U-CHANNEL

### HVR-0

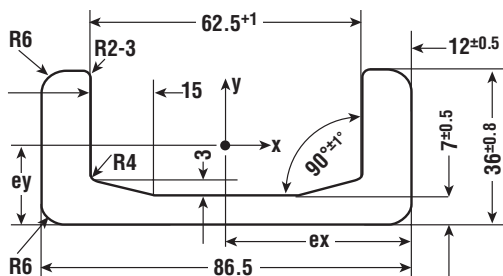


**WEIGHT** = 10.5 Kg/m  
**MOMENT OF INERTIA**  
 $I_x = 15.35 \text{ cm}^4$ ,  $I_y = 137.05 \text{ cm}^4$   
**DIST. TO CENTER OF GRAVITY**  
 $e_y = 1.29 \text{ cm}$ ,  $e_x = 4.33 \text{ cm}$

**RADIUS OF INERTIA**  
 $i_x = 1.07 \text{ cm}$ ,  $i_y = 3.20 \text{ cm}$   
**MOMENT OF RESISTANCE**  
 $W_{x_{min}} = 6.64 \text{ cm}^3$   
 $W_{x_{max}} = 11.93 \text{ cm}^3$   
 $W_y = 31.69 \text{ cm}^3$

## FLANGE PLATE


### HVPO-1

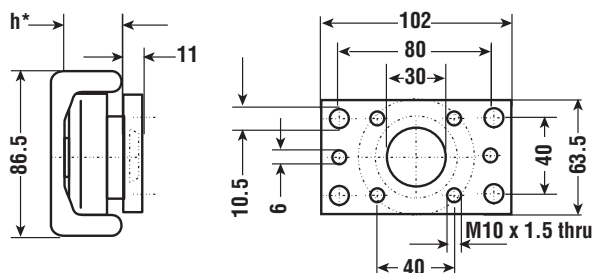

\* "h" refers to the depth of the axial bearing, so "h" depends on choice of HVB-054 or HVBEA-454.

## CLAMP FLANGE

### HVC-0

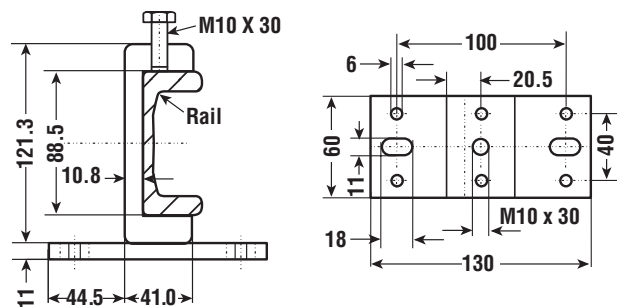

WHEN USED WITH SHOWN PROFILE RAILS

System Max. Static Radial Load = 7.2 KN / 0.8 US Ton-Force  
 System Max. Static Axial Load = 2.4 KN / 0.3 US Ton-Force




# Hevi-Rail® Linear Bearing Systems

## 0.9 US Ton-Force

### AXIAL BEARING - FIXED


### HVB-055

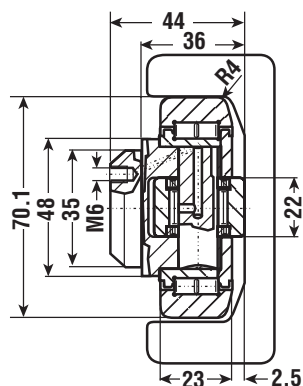

**WEIGHT** = 0.80 Kg  
**BEARING AXIAL LOAD**  
 Max. dynamic load = 18 KN  
 Max. static load = 26 KN  
**NOTE:** Above loads achievable when used with a hardened rail 55 RC minimum 2.54mm deep.

### ECCENTRIC ADJUSTABLE


### HVBEA-455

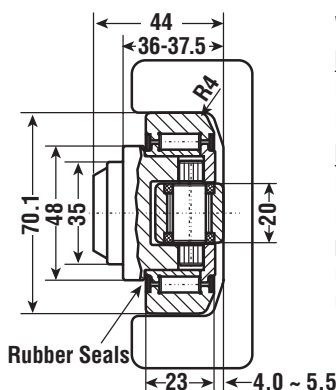

**WEIGHT** = 0.80 Kg  
**BEARING RADIAL LOAD**  
 Max. dynamic load = 56 KN  
 Max. static load = 93 KN  
**BEARING AXIAL LOAD**  
 Max. dynamic load = 16 KN  
 Max. static load = 25 KN  
**NOTE:** Above loads achievable when used with a hardened rail 55 RC minimum 2.54mm deep.

### PROFILE RAIL U-CHANNEL


### HVR-1

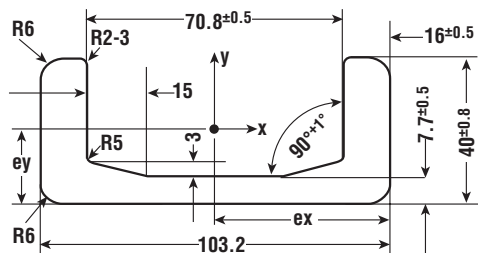

**WEIGHT** = 14.8 Kg/m  
**MOMENT OF INERTIA**  
 $I_x = 27.29 \text{ cm}^4$ ,  $I_y = 273.50 \text{ cm}^4$   
**DIST. TO CENTER OF GRAVITY**  
 $e_y = 1.50 \text{ cm}$ ,  $e_x = 5.16 \text{ cm}$   
**RADIUS OF INERTIA**  
 $i_x = 1.20 \text{ cm}$ ,  $i_y = 3.81 \text{ cm}$   
**MOMENT OF RESISTANCE**  
 $W_{x_{min}} = 10.91 \text{ cm}^3$   
 $W_{x_{max}} = 18.20 \text{ cm}^3$   
 $W_y = 53.00 \text{ cm}^3$

### PROFILE RAIL I-CHANNEL


### HVRI-07

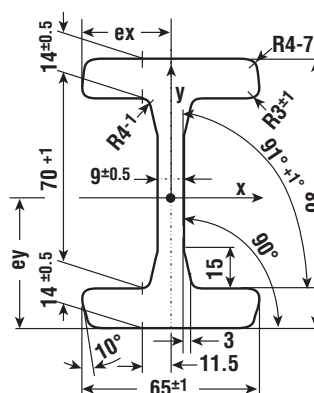

**WEIGHT** = 19.4 Kg/m  
**MOMENT OF INERTIA**  
 $I_x = 344.29 \text{ cm}^4$ ,  $I_y = 57.63 \text{ cm}^3$   
**DIST. TO CENTER OF GRAVITY**  
 $e_y = 4.90 \text{ cm}$ ,  $e_x = 3.25 \text{ cm}$   
**RADIUS OF INERTIA**  
 $i_x = 3.73 \text{ cm}$ ,  $i_y = 1.52 \text{ cm}$   
**MOMENT OF RESISTANCE**  
 $W_x = 70.26 \text{ cm}^3$ ,  $W_y = 17.73 \text{ cm}^3$


### FLANGE PLATE

### HVP1-1

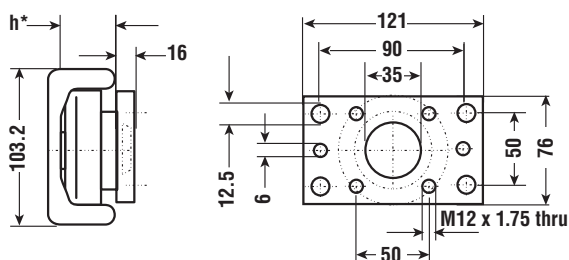

### CLAMP FLANGE

### HVC-1

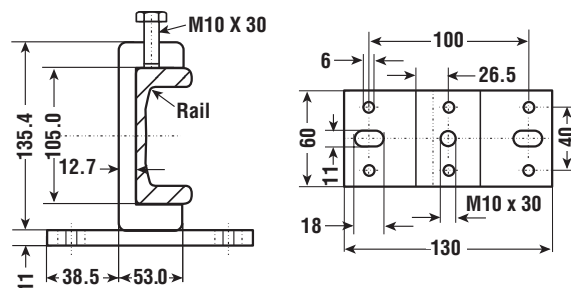

\* "h" refers to the depth of the axial bearing, so "h" depends on choice of HVB-055 or HVBEA-455.


WHEN USED WITH SHOWN PROFILE RAILS

System Max. Static Radial Load = 8.6 KN / 0.9 US Ton-Force  
 System Max. Static Axial Load = 2.8 KN / 0.3 US Ton-Force



## AXIAL BEARING - FIXED

### HVB-056



**WEIGHT** = 1.00 Kg

#### BEARING RADIAL LOAD

Max. dynamic load = 59 KN  
Max. static load = 102 KN


#### BEARING AXIAL LOAD

Max. dynamic load = 20 KN  
Max. static load = 32 KN

**NOTE:** Above loads achievable when used with a hardened rail 55 RC minimum 2.54mm deep.

## ECCENTRIC ADJUSTABLE

### HVBEA-456

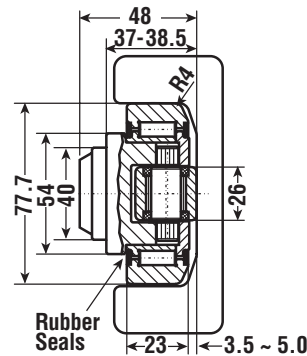

**WEIGHT** = 1.00 Kg

#### BEARING RADIAL LOAD

Max. dynamic load = 59 KN  
Max. static load = 102 KN


#### BEARING AXIAL LOAD

Max. dynamic load = 23 KN  
Max. static load = 36 KN

**NOTE:** Above loads achievable when used with a hardened rail 55 RC minimum 2.54mm deep.

## PROFILE RAIL U-CHANNEL

### HVR-2

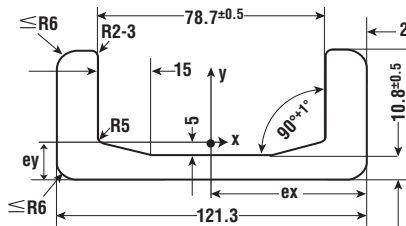

**WEIGHT** = 20.9 Kg/m

#### MOMENT OF INERTIA

$I_x = 37.92 \text{ cm}^4$ ,  $I_y = 493.58 \text{ cm}^4$

#### DIST. TO CENTER OF GRAVITY

$e_y = 1.54 \text{ cm}$ ,  $e_x = 6.07 \text{ cm}$

#### RADIUS OF INERTIA


$i_x = 1.19 \text{ cm}$ ,  $i_y = 4.30 \text{ cm}$

#### MOMENT OF RESISTANCE

$W_{x_{min}} = 14.83 \text{ cm}^3$ ,  $W_{x_{max}} = 24.58 \text{ cm}^3$ ,  $W_y = 81.38 \text{ cm}^3$


## FLANGE PLATE

### HVP2-1

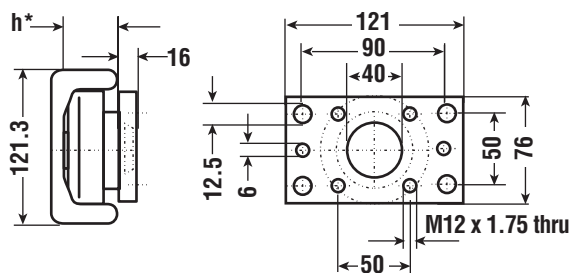

## CLAMP FLANGE

### HVC-2

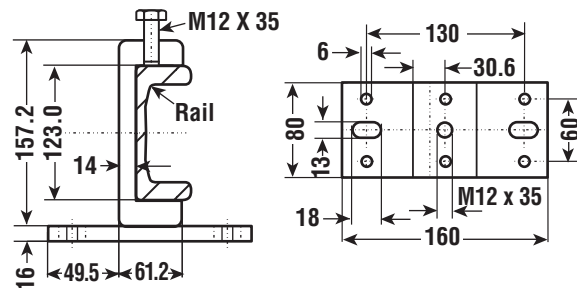

\* "h" refers to the depth of the axial bearing,  
so "h" depends on choice of HVB-056 or HVBEA-456.

WHEN USED WITH SHOWN PROFILE RAILS

System Max. Static Radial Load = 8.9 KN / 1.0 US Ton-Force  
System Max. Static Axial Load = 3.0 KN / 0.3 US Ton-Force




# Hevi-Rail® Linear Bearing Systems

## 1.0 US Ton-Force

### AXIAL BEARING - FIXED

### HVB-057

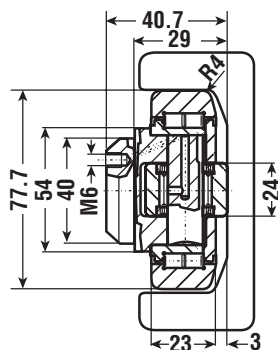

**WEIGHT** = 0.90 Kg

**BEARING RADIAL LOAD**

Max. dynamic load = 59 KN

Max. static load = 102 KN

**BEARING AXIAL LOAD**


Max. dynamic load = 20 KN

Max. static load = 32 KN

**NOTE:** Above loads achievable when used with a hardened rail 55 RC minimum 2.54mm deep.

### ECCENTRIC ADJUSTABLE

### HVBEA-457

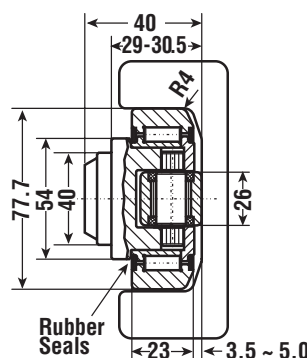

**WEIGHT** = 0.87 Kg

**BEARING RADIAL LOAD**

Max. dynamic load = 59 KN

Max. static load = 102 KN

**BEARING AXIAL LOAD**


Max. dynamic load = 23 KN

Max. static load = 36 KN

**NOTE:** Above loads achievable when used with a hardened rail 55 RC minimum 2.54mm deep.

### PROFILE RAIL I-CHANNEL

### HVRI-08

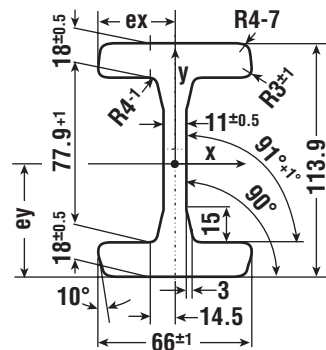

**WEIGHT** = 25.3 Kg/m

**MOMENT OF INERTIA**

$I_x = 597.54 \text{ cm}^4$ ,  $I_y = 76.79 \text{ cm}^4$

**DIST. TO CENTER OF GRAVITY**

$e_y = 5.70 \text{ cm}$ ,  $e_x = 3.30 \text{ cm}$

**RADIUS OF INERTIA**

$i_x = 4.24 \text{ cm}$ ,  $i_y = 1.54 \text{ cm}$


**MOMENT OF RESISTANCE**

$W_x = 104.92 \text{ cm}^3$ ,

$W_y = 23.27 \text{ cm}^3$

### FLANGE PLATE

### HVP2-1

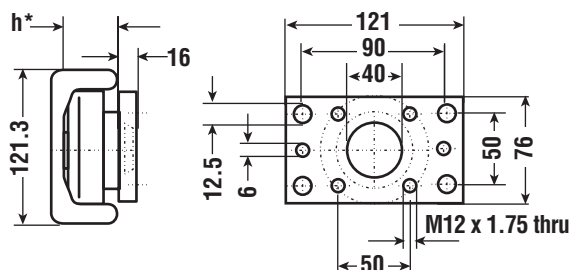

\* "h" refers to the depth of the axial bearing,  
so "h" depends on choice of HVB-057 or HVBEA-457.


WHEN USED WITH SHOWN PROFILE RAILS

**System Max. Static Radial Load = 8.9 KN / 1.0 US Ton-Force**  
**System Max. Static Axial Load = 3.0 KN / 0.3 US Ton-Force**



## AXIAL BEARING - FIXED

**HVB-058**

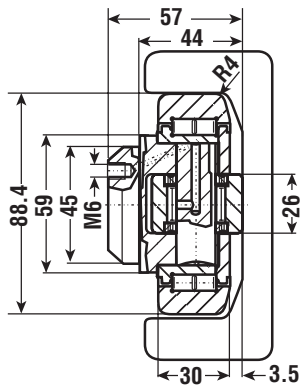

**WEIGHT** = 1.62 Kg

**BEARING RADIAL LOAD**

Max. dynamic load = 85 KN  
Max. static load = 134 KN


**BEARING AXIAL LOAD**

Max. dynamic load = 27 KN  
Max. static load = 44 KN

**NOTE:** Above loads achievable when used with a hardened rail 55 RC minimum 2.54mm deep.

## ECCENTRIC ADJUSTABLE

**HVBEA-458**

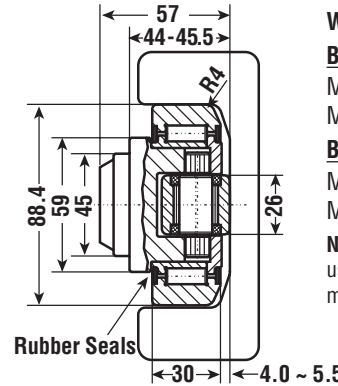

**WEIGHT** = 1.62 Kg

**BEARING RADIAL LOAD**

Max. dynamic load = 85 KN  
Max. static load = 134 KN


**BEARING AXIAL LOAD**

Max. dynamic load = 23 KN  
Max. static load = 36 KN

**NOTE:** Above loads achievable when used with a hardened rail 55 RC minimum 2.54mm deep.

## PROFILE RAIL U-CHANNEL

**HVR-3**

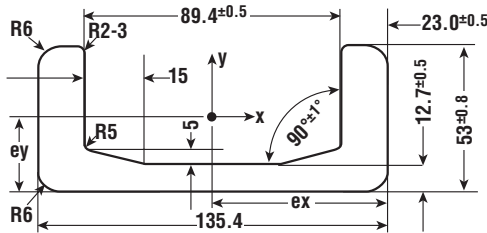

**WEIGHT** = 28.6 Kg/m

**MOMENT OF INERTIA**

$I_x = 89.47 \text{ cm}^4$ ,  $I_y = 865.23 \text{ cm}^4$

**DIST. TO CENTER OF GRAVITY**

$e_y = 1.99 \text{ cm}$ ,  $e_x = 6.77 \text{ cm}$

**RADIUS OF INERTIA**

$i_x = 1.57 \text{ cm}$ ,  $i_y = 4.87 \text{ cm}$

**MOMENT OF RESISTANCE**


$W_{x_{min}} = 27.03 \text{ cm}^3$

$W_{x_{max}} = 44.96 \text{ cm}^3$

$W_y = 127.80 \text{ cm}^3$

## PROFILE RAIL I-CHANNEL

**HVRI-09**

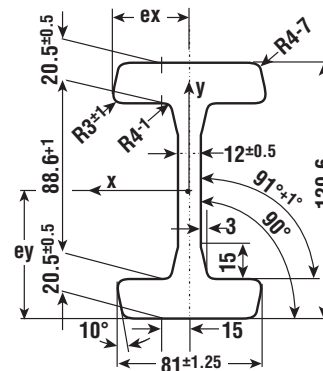

**WEIGHT** = 34.1 Kg/m

**MOMENT OF INERTIA**

$I_x = 1037.22 \text{ cm}^4$ ,  $I_y = 161.89 \text{ cm}^4$

**DIST. TO CENTER OF GRAVITY**

$e_y = 6.48 \text{ cm}$ ,  $e_x = 4.05 \text{ cm}$

**RADIUS OF INERTIA**

$i_x = 4.89 \text{ cm}$ ,  $i_y = 1.93 \text{ cm}$


**MOMENT OF RESISTANCE**

$W_x = 160.07 \text{ cm}^3$ ,

$W_y = 39.97 \text{ cm}^3$

## FLANGE PLATE


**HVP3-1**

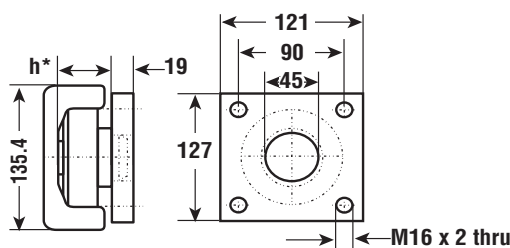

\* "h" refers to the depth of the axial bearing, so "h" depends on choice of HVB-058 or HVBEA-458.

## CLAMP FLANGE

**HVC-3**

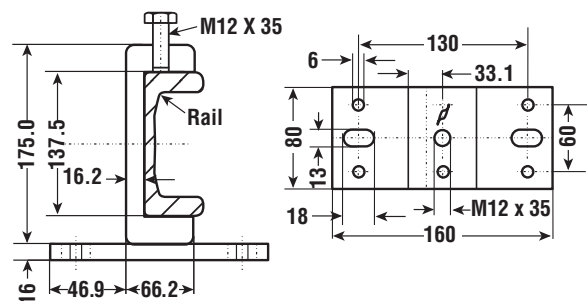

WHEN USED WITH SHOWN PROFILE RAILS

System Max. Static Radial Load = 15.6 KN / 1.7 US Ton-Force


System Max. Static Axial Load = 5.2 KN / 0.6 US Ton-Force



# Hevi-Rail® Linear Bearing Systems

## 1.8 US Ton-Force

### AXIAL BEARING - FIXED HVB-059



**WEIGHT** = 1.80 Kg

#### BEARING RADIAL LOAD

Max. dynamic load = 92 KN

Max. static load = 153 KN


#### BEARING AXIAL LOAD

Max. dynamic load = 32 KN

Max. static load = 50 KN

**NOTE:** Above loads achievable when used with a hardened rail 55 RC minimum 2.54mm deep.

### ECCENTRIC ADJUSTABLE HVBEA-459



**WEIGHT** = 1.74 Kg

#### BEARING RADIAL LOAD

Max. dynamic load = 91 KN


Max. static load = 140 KN

#### BEARING AXIAL LOAD

Max. dynamic load = 32 KN

Max. static load = 50 KN

### PROFILE RAIL I-CHANNEL HVRI-10

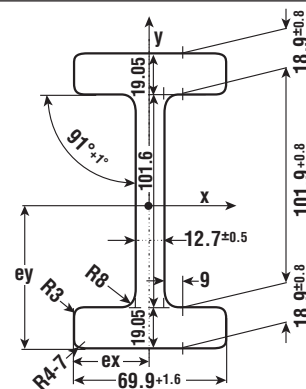

**WEIGHT** = 30.9 Kg/m

#### MOMENT OF INERTIA

$I_x = 1078.01 \text{ cm}^4$ ,  $I_y = 104.38 \text{ cm}^4$

#### DIST. TO CENTER OF GRAVITY

$e_y = 6.99 \text{ cm}$ ,  $e_x = 3.49 \text{ cm}$


#### MOMENT OF RESISTANCE

$W_x = 154.33 \text{ cm}^3$ ,  $W_y = 29.89 \text{ cm}^3$

WHEN USED WITH SHOWN PROFILE RAILS

**System Max. Static Radial Load = 15.5 KN / 1.7 US Ton-Force**  
**System Max. Static Axial Load = 5.1 KN / 0.6 US Ton-Force**

### AXIAL BEARING - FIXED HVB-060

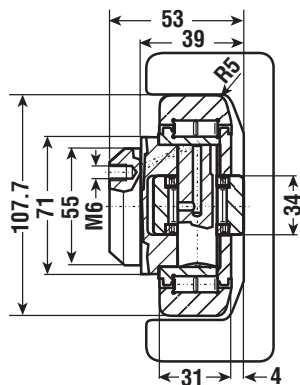

**WEIGHT** = 2.30 Kg

#### BEARING RADIAL LOAD

Max. dynamic load = 100 KN


Max. static load = 174 KN

#### BEARING AXIAL LOAD

Max. dynamic load = 39 KN

Max. static load = 66 KN

### ECCENTRIC ADJUSTABLE HVBEA-460

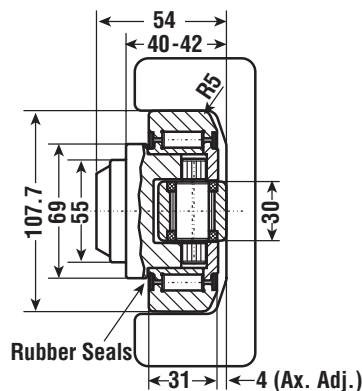

**WEIGHT** = 2.27 Kg

#### BEARING RADIAL LOAD

Max. dynamic load = 100 KN


Max. static load = 174 KN

#### BEARING AXIAL LOAD

Max. dynamic load = 32 KN

Max. static load = 50 KN

### PROFILE RAIL I-CHANNEL HVRI-11

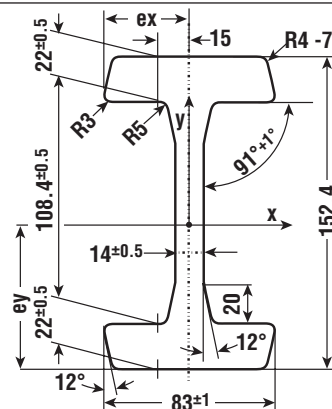

**WEIGHT** = 40.5 Kg/m

#### MOMENT OF INERTIA

$I_x = 1670.08 \text{ cm}^4$ ,  $I_y = 184.52 \text{ cm}^4$

#### DIST. TO CENTER OF GRAVITY

$e_y = 7.62 \text{ cm}$ ,  $e_x = 4.15 \text{ cm}$

#### RADIUS OF INERTIA

$i_x = 5.69 \text{ cm}$ ,  $i_y = 1.91 \text{ cm}$

#### MOMENT OF RESISTANCE

$W_x = 219.17 \text{ cm}^3$ ,  $W_y = 44.46 \text{ cm}^3$

WHEN USED WITH SHOWN PROFILE RAILS


**System Max. Static Radial Load = 16.5 KN / 1.8 US Ton-Force**  
**System Max. Static Axial Load = 5.5 KN / 0.6 US Ton-Force**





## AXIAL BEARING - FIXED

### HVB-061

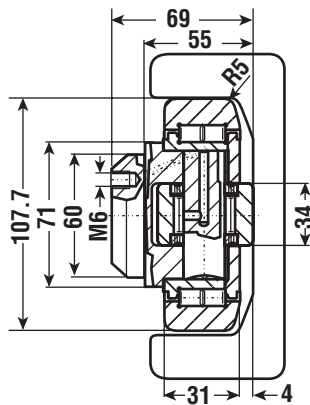

**WEIGHT** = 2.82 Kg

**BEARING RADIAL LOAD**

Max. dynamic load = 100 KN  
Max. static load = 174 KN


**BEARING AXIAL LOAD**

Max. dynamic load = 39 KN  
Max. static load = 66 KN

**NOTE:** Above loads achievable when used with a hardened rail 55 RC minimum 2.54mm deep.

## ECCENTRIC ADJUSTABLE

### HVBEA-461

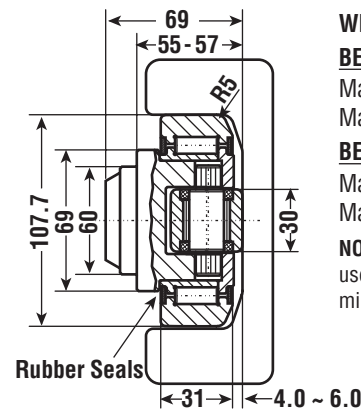

**WEIGHT** = 2.82 Kg

**BEARING RADIAL LOAD**

Max. dynamic load = 100 KN  
Max. static load = 174 KN


**BEARING AXIAL LOAD**

Max. dynamic load = 32 KN  
Max. static load = 50 KN

**NOTE:** Above loads achievable when used with a hardened rail 55 RC minimum 2.54mm deep.

## PROFILE RAIL U-CHANNEL

### HVR-4

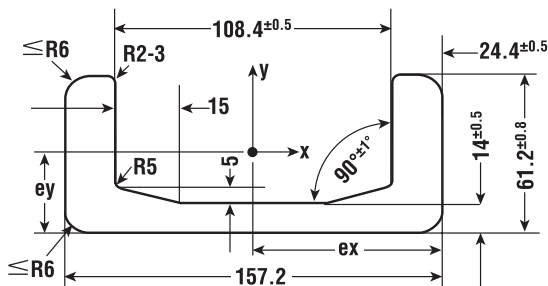

**WEIGHT** = 35.9 Kg/m

**MOMENT OF INERTIA**

$I_x = 150.98 \text{ cm}^4$   
 $I_y = 1,494.32 \text{ cm}^4$

**DIST. TO CENTER OF GRAVITY**

$e_y = 2.25 \text{ cm}$ ,  $e_x = 7.86 \text{ cm}$

**RADIUS OF INERTIA**


$i_x = 1.82 \text{ cm}$ ,  $i_y = 5.72 \text{ cm}$

**MOMENT OF RESISTANCE**

$W_{x_{min}} = 39.00 \text{ cm}^3$   
 $W_{x_{max}} = 67.13 \text{ cm}^3$   
 $W_y = 190.12 \text{ cm}^3$

## FLANGE PLATE


### HVP4-1

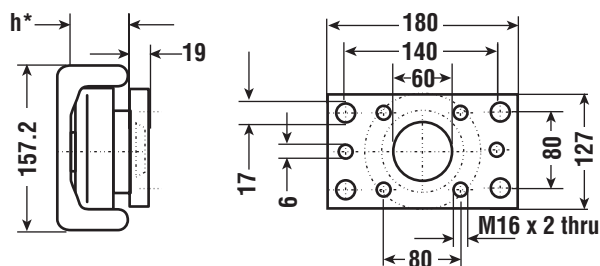

\* "h" refers to the depth of the axial bearing, so "h" depends on choice of HVB-061 or HVBEA-461.

## CLAMP FLANGE

### HVC-4

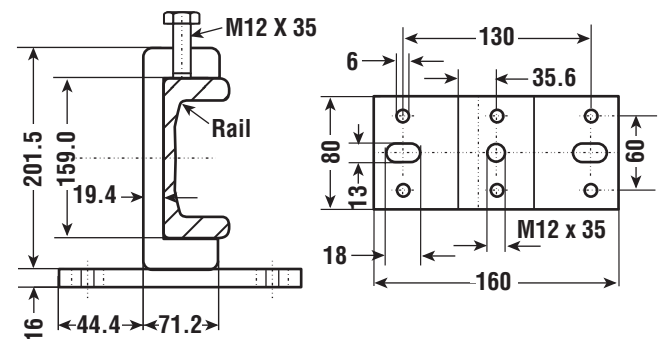

WHEN USED WITH SHOWN PROFILE RAILS

System Max. Static Radial Load = 16.5 KN / 1.8 US Ton-Force  
System Max. Static Axial Load = 5.5 KN / 0.6 US Ton-Force




# Hevi-Rail® Linear Bearing Systems

## 2.6 US Ton-Force

### AXIAL BEARING - FIXED


### HVB-062

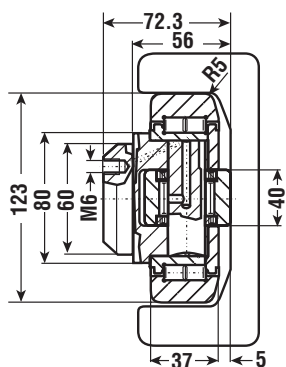

**WEIGHT** = 4.50 Kg  
**BEARING RADIAL LOAD**  
 Max. dynamic load = 135 KN  
 Max. static load = 242 KN  
**BEARING AXIAL LOAD**  
 Max. dynamic load = 47 KN  
 Max. static load = 90 KN  
**NOTE:** Above loads achievable when used with a hardened rail 55 RC minimum 2.54mm deep.

### ECCENTRIC ADJUSTABLE


### HVBEA-462

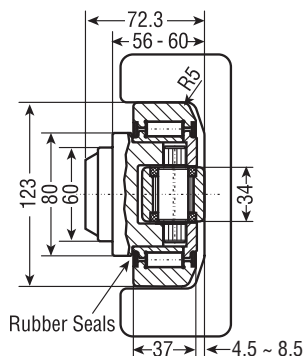

**WEIGHT** = 3.90 Kg  
**BEARING RADIAL LOAD**  
 Max. dynamic load = 135 KN  
 Max. static load = 242 KN  
**BEARING AXIAL LOAD**  
 Max. dynamic load = 41 KN  
 Max. static load = 72 KN

### PROFILE RAIL U-CHANNEL


### HVR-5

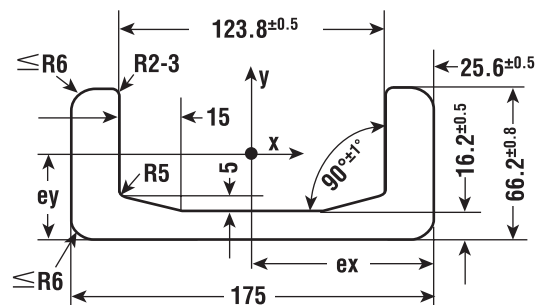

**WEIGHT** = 42.9 Kg/m  
**MOMENT OF INERTIA**  
 $I_x = 205.84 \text{ cm}^4$ ,  
 $I_y = 2,185.32 \text{ cm}^4$   
**DIST. TO CENTER OF GRAVITY**  
 $e_y = 2.37 \text{ cm}$ ,  $e_x = 8.75 \text{ cm}$   
**RADIUS OF INERTIA**  
 $i_x = 1.94 \text{ cm}$ ,  $i_y = 6.32 \text{ cm}$   
**MOMENT OF RESISTANCE**  
 $W_{x_{\min}} = 48.42 \text{ cm}^3$   
 $W_{x_{\max}} = 86.89 \text{ cm}^3$   
 $W_y = 249.75 \text{ cm}^3$

### FLANGE PLATE

### HVP4-1

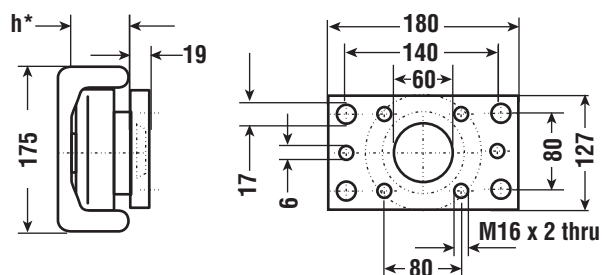

\* "h" refers to the depth of the axial bearing, so "h" depends on choice of HVB-062 or HVBEA-462.


WHEN USED WITH SHOWN PROFILE RAILS,

**System Max. Static Radial Load = 23.5 KN / 2.6 US Ton-Force**  
**System Max. Static Axial Load = 7.8 KN / 0.9 US Ton-Force**



### AXIAL BEARING - FIXED

### HVB-063

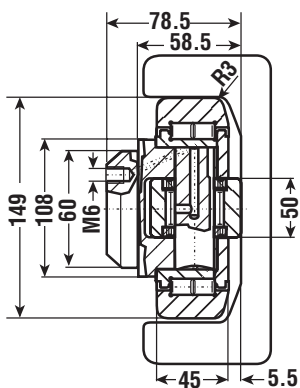

**WEIGHT** = 6.52 Kg

#### BEARING RADIAL LOAD

Max. dynamic load = 183 KN

Max. static load = 353 KN

#### BEARING AXIAL LOAD


Max. dynamic load = 82 KN

Max. static load = 131 KN

**NOTE:** Above loads achievable when used with a hardened rail 55 RC minimum 2.54mm deep.

### ECCENTRIC ADJUSTABLE

### HVBEA-463

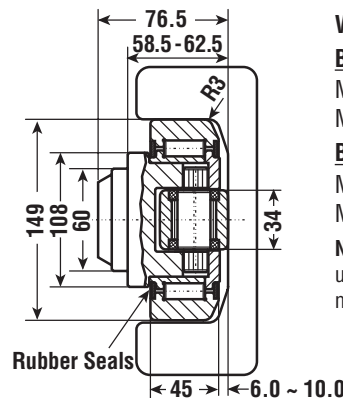

**WEIGHT** = 6.50 Kg

#### BEARING RADIAL LOAD

Max. dynamic load = 183 KN

Max. static load = 353 KN


#### BEARING AXIAL LOAD

Max. dynamic load = 41 KN

Max. static load = 72 KN

**NOTE:** Above loads achievable when used with a hardened rail 55 RC minimum 2.54mm deep.

### PROFILE RAIL HVR-6

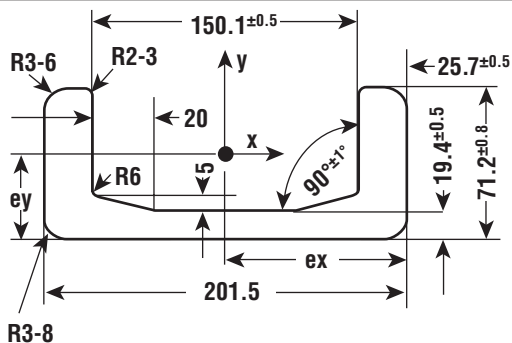

**WEIGHT** = 52.3 Kg/m

#### MOMENT OF INERTIA

$I_x = 269.52 \text{ cm}^4$ ,

$I_y = 3,423.08 \text{ cm}^4$

#### DIST. TO CENTER OF GRAVITY

$e_y = 2.40 \text{ cm}$ ,  $e_x = 10.08 \text{ cm}$

#### RADIUS OF INERTIA

$i_x = 2.01 \text{ cm}$ ,  $i_y = 7.17 \text{ cm}$

#### MOMENT OF RESISTANCE


$W_{x_{min}} = 57.15 \text{ cm}^3$

$W_{x_{max}} = 112.11 \text{ cm}^3$

$W_y = 339.76 \text{ cm}^3$

### FLANGE PLATE

### HVP6-1

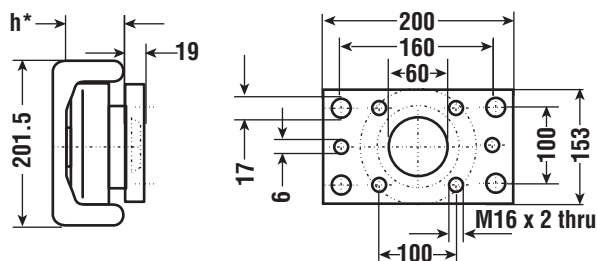


\* "h" refers to the depth of the axial bearing, so "h" depends on choice of HVB-063 or HVBEA-463.

WHEN USED WITH SHOWN PROFILE RAILS

System Max. Static Radial Load = 41.1 KN / 4.6 US Ton-Force  
System Max. Static Axial Load = 13.7 KN / 1.5 US Ton-Force


# Design & Layout Options

Name: _____	Date: _____
Dept.: _____	Phone: _____ Fax: _____
Company: _____	Machine Type/Name: _____
Email: _____	
Address: _____	
_____	

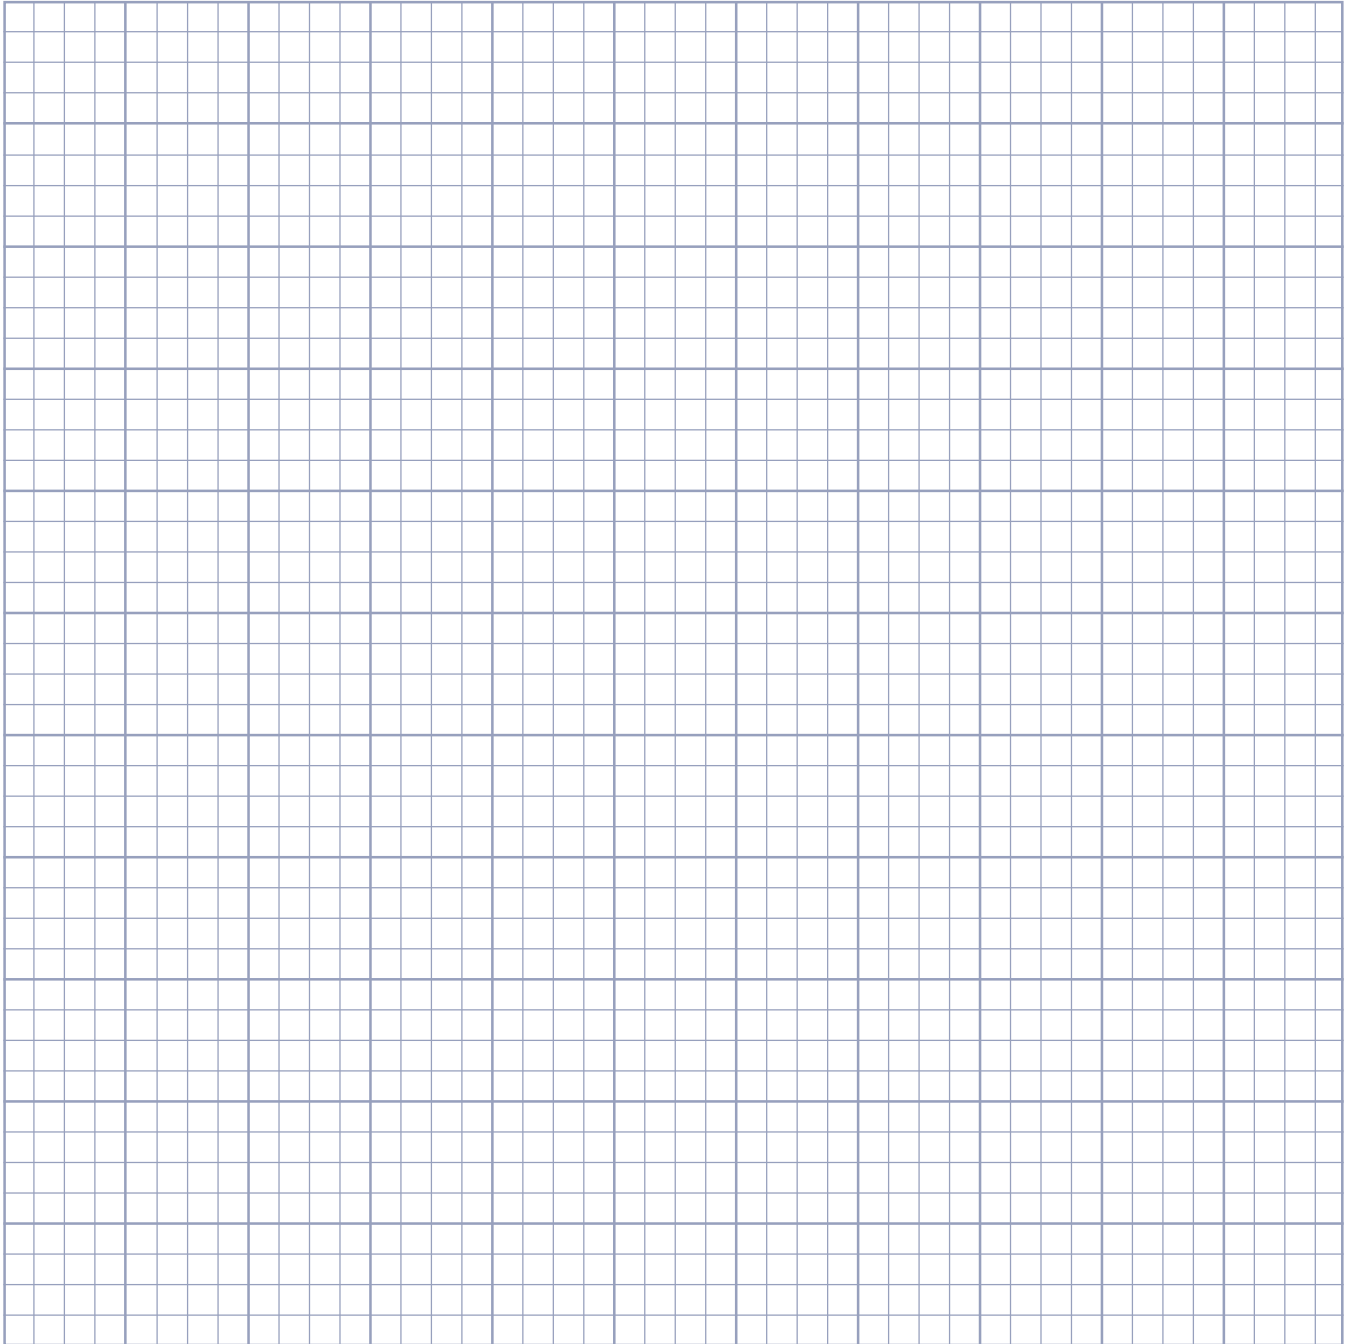


# Design & Layout Options

Name: _____	Date: _____
Dept.: _____	Phone: _____ Fax: _____
Company: _____	Machine Type/Name: _____
Email: _____	
Address: _____	
_____	

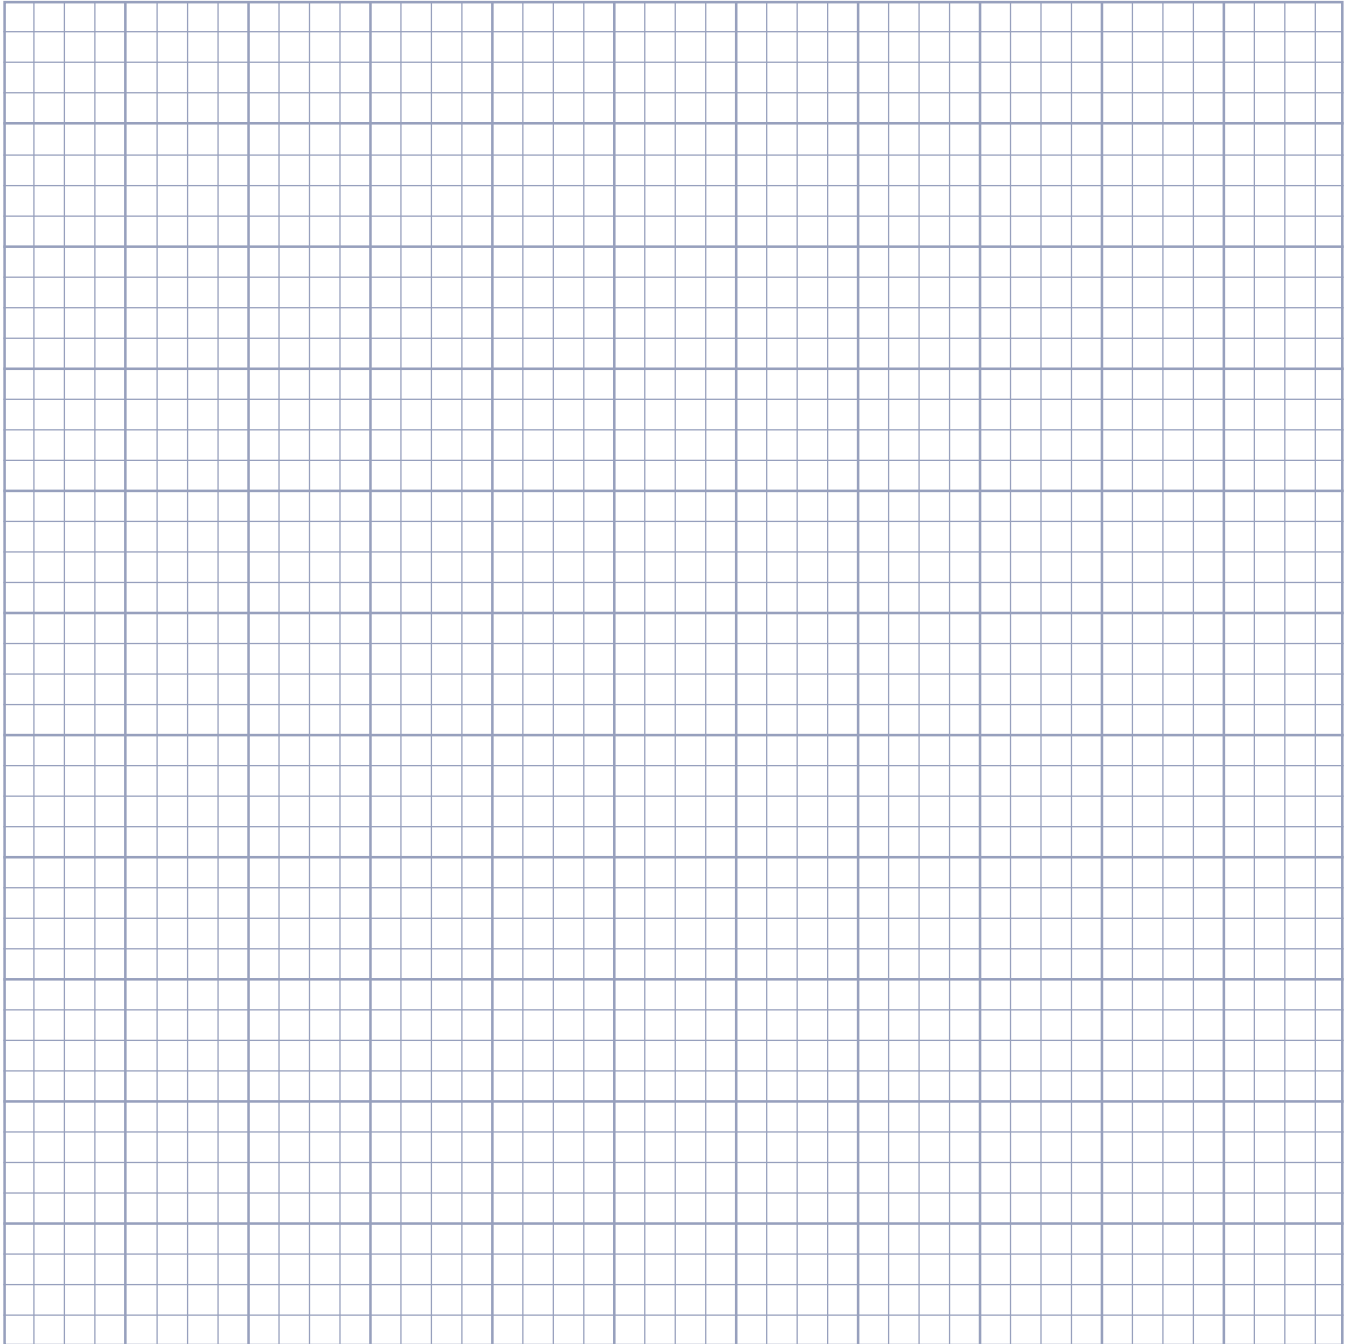



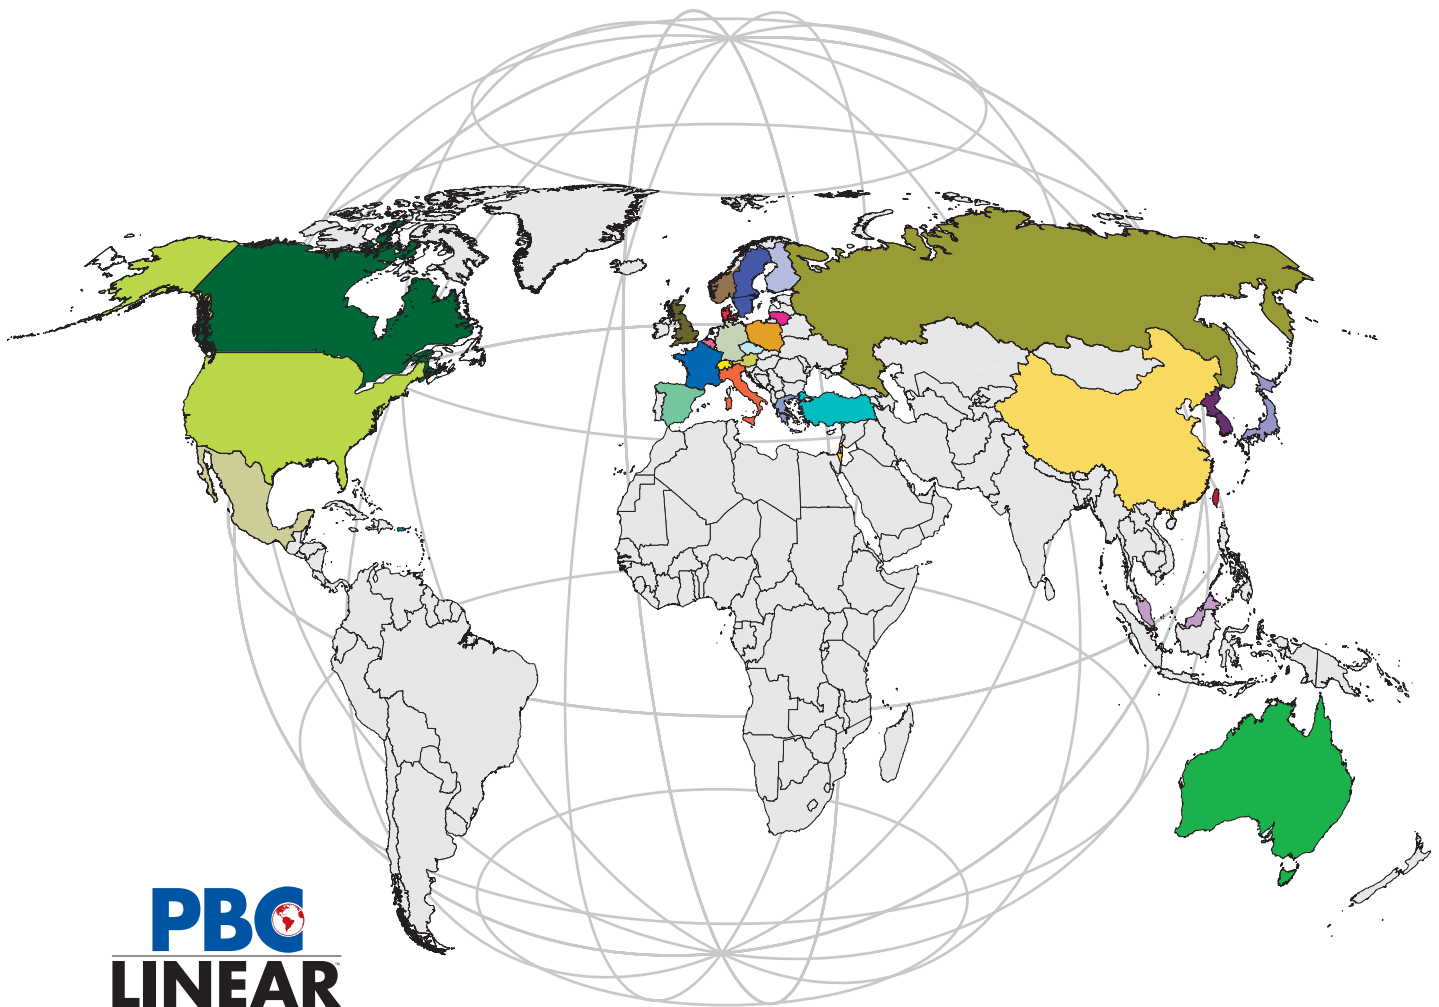






**LOCATE YOUR NEAREST DISTRIBUTOR AT [www.pbclinear.com](http://www.pbclinear.com)**

- |   |   |   |
|---|---|---|
| <span style="color: green;">■</span> Australia          | <span style="color: blue;">■</span> Greece          | <span style="color: olive;">■</span> Russia               |
| <span style="color: yellow-green;">■</span> Austria     | <span style="color: yellow;">■</span> Israel        | <span style="color: pink;">■</span> Singapore             |
| <span style="color: pink;">■</span> Belgium             | <span style="color: orange;">■</span> Italy         | <span style="color: lightgreen;">■</span> Spain           |
| <span style="color: orange;">■</span> Brazil            | <span style="color: lightblue;">■</span> Japan      | <span style="color: blue;">■</span> Sweden                |
| <span style="color: darkgreen;">■</span> Canada         | <span style="color: purple;">■</span> Korea         | <span style="color: yellow;">■</span> Switzerland         |
| <span style="color: yellow;">■</span> China             | <span style="color: magenta;">■</span> Lithuania    | <span style="color: red;">■</span> Taiwan                 |
| <span style="color: lightblue;">■</span> Czech Republic | <span style="color: lightpurple;">■</span> Malaysia | <span style="color: cyan;">■</span> Turkey                |
| <span style="color: red;">■</span> Denmark              | <span style="color: tan;">■</span> Mexico           | <span style="color: olive;">■</span> United Kingdom       |
| <span style="color: lightblue;">■</span> Finland        | <span style="color: brown;">■</span> Norway         | <span style="color: yellow-green;">■</span> United States |
| <span style="color: blue;">■</span> France              | <span style="color: teal;">■</span> Puerto Rico     |   |
| <span style="color: lightgreen;">■</span> Germany       | <span style="color: orange;">■</span> Poland        |   |

# LINEAR MOTION SOLUTIONS

Simplicity® Self-Lubricated Bearings, Guides, Systems & Slides

<p><b>Self-Lubricating Linear Plane Bearing and Shafting</b></p> <ul style="list-style-type: none"> <li>• Oil-free - maintenance free</li> <li>• Dampens vibration &amp; shock loads</li> <li>• Engineered-to-match shafting, pillow blocks and support rails</li> </ul> <p><b>simplicity</b></p>	
<p><b>Self-Lubricating Miniature Linear Guides</b></p> <ul style="list-style-type: none"> <li>• No rolling elements</li> <li>• Lengths up to 3600 mm (12 ft.)</li> <li>• No lubrication required</li> <li>• Tolerates extreme temperatures</li> </ul> <p><b>mini-rail</b></p>	
<p><b>Redi-Rail Linear Guides, Drawer Slides and V-Guide Systems</b></p> <ul style="list-style-type: none"> <li>• Ideal for long travel and harsh environment applications</li> <li>• Precision tolerances +/- .025 mm over entire rail length</li> <li>• Simple design for fast, easy installation</li> <li>• Lightweight, durable construction</li> </ul> <p><b>redi-rail</b></p>	
<p><b>Modular Guides, Slides, Tables and Stage Assemblies</b></p> <ul style="list-style-type: none"> <li>• Dampens vibration &amp; shock loads</li> <li>• Customize with ball or lead screws, belt drives &amp; more</li> <li>• No lubrication required</li> <li>• Tolerates temperature extremes</li> </ul> <p><b>Uni-guide</b></p>	
<p><b>Heavy-Duty Rolling Element Bearings and Rails</b></p> <ul style="list-style-type: none"> <li>• Extremely high load capacity up to 4.6 US Ton-force</li> <li>• Longer service life for bearings and profiles</li> <li>• Unlimited rail lengths available</li> </ul> <p><b>Hevi-Rail</b> Heavy Duty Bearing Systems</p>	



6402 E. Rockton Road  
Roscoe, Illinois 61073 USA

Phone: 815.389.5600  
800.962.8979

Fax: 815.389.5790

[www.pbclinear.com](http://www.pbclinear.com)

**PBC**  
**LINEAR**  
A PACIFIC BEARING CO.